



THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPERTY OF BEL/STEWART/TRP CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF TRP CONNECTOR.

PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS:
5736910 5939955 6425781 6428361 6554638 6840817 7123117
7429195 7717749 7808751 6217391 6149050 7924130

REVISIONS				
#	LYR	DESCRIPTION	DATE	DWN APVD
G		EC-1411035 COMPANY LOGO CHANGE	09FEB2015	TR TY

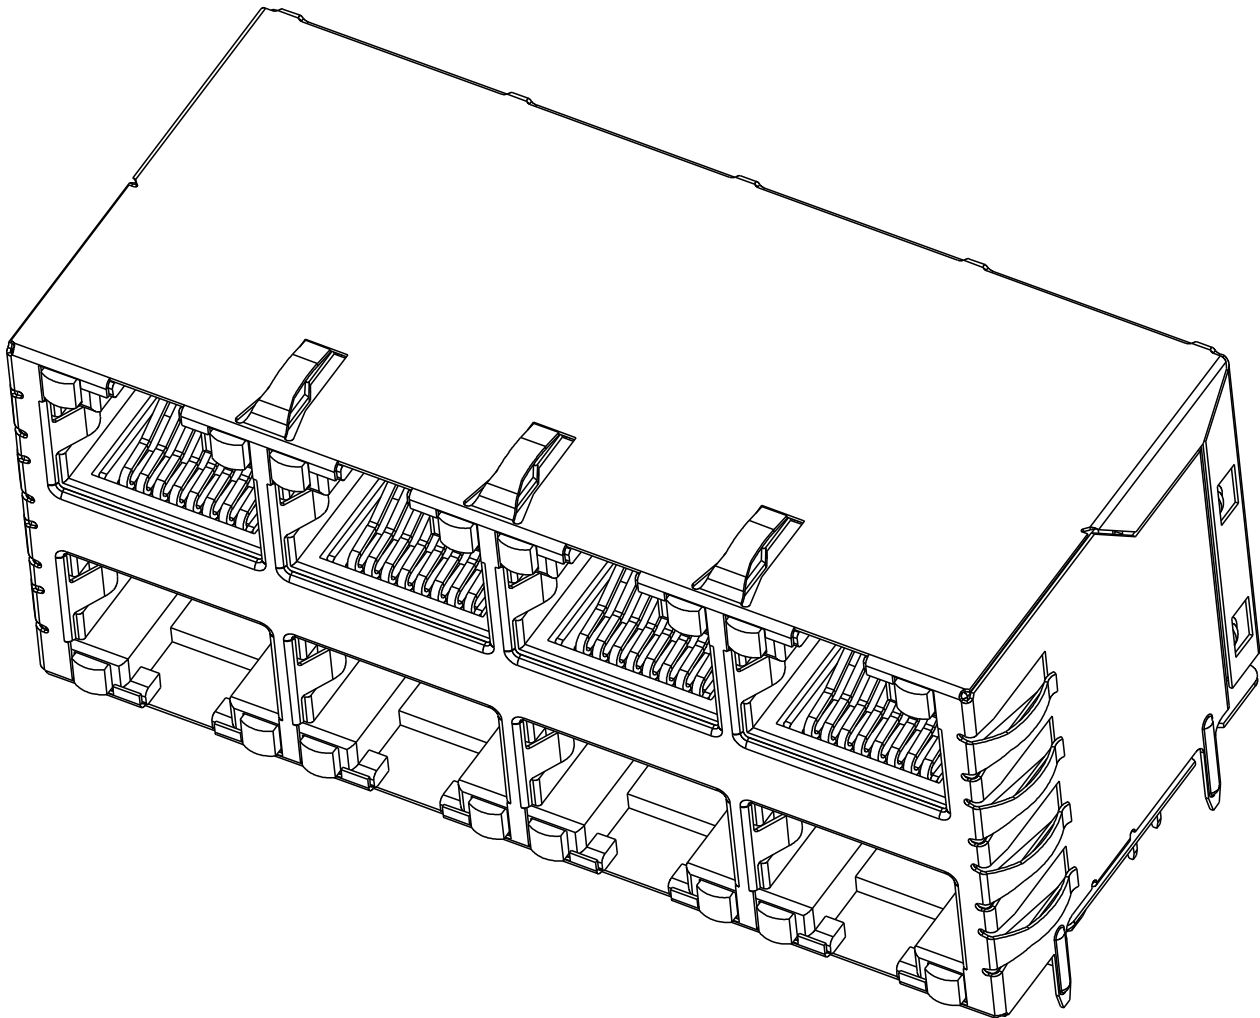

S866P9 10/100 CIRCUIT
TOP AND BOTTOM PORTS

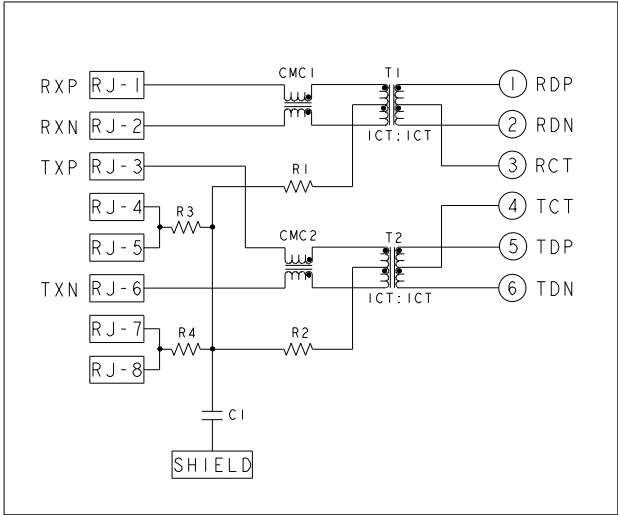

C1 = 1000pF, 2kV, ±10%, X7R DECOUPLING CAP.
R1-R4 = 75 OHMS, 1/16 W, ±5% RESISTORS

1. MATERIALS:
PLASTIC HOUSING: BLACK, THERMOPLASTIC FLAMMABILITY RATING UL 94V-0
SHIELD: BRASS, PREPLATED WITH 0.76um MIN SEMI-BRIGHT NICKEL,
POST DIPPED WITH 2.54um MIN SAC SOLDER ON SOLDER TAILS,
CONTACTS: PHOSPHOR BRONZE, 1.27um MIN OVERALL NICKEL
UNDERPLATE WITH SELECT 1.27um MIN GOLD AT MATING INTERFACE
AND 2.54um MIN MATTE TIN ON SOLDER TAILS.
LED: DIFFUSED EPOXY LENS, CARBON STEEL LEAD FRAME TAILS OF LED
ARE PREPLATED WITH 2.03um MIN SILVER OVER 1.02um MIN NICKEL
UNDERPLATE OVER 1.02um MIN COPPER UNDERPLATE. POST-PLATED WITH
2.54um MIN MATTE TIN AND/OR SAC SOLDER DIP OR PURE TIN SOLDER DIP
INTERNAL MAGNETICS PC BOARDS: HIGH TEMP PCB, TG>170°C.
2. MAGNETICS
APPLICATION: 10/100 BASE-T
IMPEDANCE: 100 OHMS
TURNS RATIO (CHIP:CABLE): TX = 1:1, RX = 1:1
OPEN CIRCUIT INDUCTANCE (OCL): 350uH MIN @100kHz, 0.1VRMS,
8mADC BIAS FROM 0°C TO 70°C, TX AND RX
PERFORMANCE @ 25°C:
INSERTION LOSS (IL): 1.1dB MAX FROM 0.5MHz TO 100MHz
RETURN LOSS (RL): 18dB MIN FROM 0.5MHz TO 30MHz
18-20LOG(f/30)dB MIN FROM 30.1MHz TO 60MHz
12dB MIN FROM 60.1MHz TO 80MHz
CROSSTALK ATTENUATION: 35dB MIN FROM 0.5MHz TO 40MHz
33-20LOG(f/50)dB MIN FROM 40.1MHz TO 100MHz
COMMON MODE REJECTION RATIO (CMRR): 30dB MIN FROM 0.5MHz TO 100MHz
ISOLATION VOLTAGE: COMPLIES WITH IEEE802.3 2002, PARA 23.5.1.1, ITEM b.
3. PART NUMBER, DATE CODE AND COUNTRY OF ORIGIN LOCATED IN APPROXIMATE AREA SHOWN. DATE CODE "YY" IS THE YEAR, "WW" IS THE WEEK, "D" IS THE DAY OF WEEK, WITH SUNDAY="1"


4. AGENCY APPROVAL LOGO, TRP LOGO AND PRODUCT LOGO TO BE LOCATED IN APPROXIMATE AREA SHOWN.

5. OPERATING TEMP: FROM 0°C TO +70°C.
6. RJ45 CAVITY CONFORMS TO FCC RULES AND REGULATION PART 68 SUBPART F.
7. DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
8. BASIC DIMENSION ESTABLISHED BY CUSTOMER, BUT MAY NOT BE GREATER THAN 5.08mm.
9. LEDS ARE DRIVEN WITH CONSTANT CURRENT AT APPROX 20mA
LED COLOR: DOMINANT WAVELENGTH (λD): GREEN 568 nm TYP. @ IF=20mA
FORWARD VOLTAGE (VF): GREEN 2.2V TYP. @ IF=20mA
DOMINANT WAVELENGTH (λD): YELLOW 588 nm TYP. @ IF=20mA
FORWARD VOLTAGE (VF): YELLOW 2.1V TYP. @ IF=20mA



10. THESE PARTS ARE RECOMMENDED FOR WAVE SOLDERING PROCESS, PEAK SOLDERING TEMPERATURE IS 260 °C MAX, 10 SECONDS MAX.

2.21	GREEN	YELLOW	GREEN	YELLOW	1840133-6
3.04	GRN/YEL	GREEN	GRN/YEL	GREEN	1840133-5
3.04	GRN/YEL	GRN/YEL	GRN/YEL	GRN/YEL	1840133-4
3.04	GREEN	YELLOW	GREEN	YELLOW	1840133-3
3.04	YELLOW	GREEN	GREEN	YELLOW	1840133-2
3.04	GREEN	GREEN	GREEN	GREEN	1840133-1
DIM A	BOTTOM LED NO. 2	BOTTOM LED NO. 1	TOP LED NO. 2	TOP LED NO. 1	PART NO.


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KEKE YOUTH 19APR2006	 trp CONNECTOR a bel group DONGGUAN CHINA		
DIMENSIONS:		CHK DENNIS CHEN 19APR2006			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD TEDDY XIONG 19APR2006			
mm		MODEL NAME			
	0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ±0.25 4 PLC ±0.25 ANGLES ±0.25	MAGJACK STACK NON-PoE	DESC 2X4 S866P9 10/100 W/ LED		
PRODUCT SPEC 108-2100	APPLICATION SPEC -	CUSTOMER DRAWING	SIZE A1	CAGE CODE C=1840133	RESTRICTED TO -
			SCALE 4:1	SHEET 1	OF 4
			REV G		

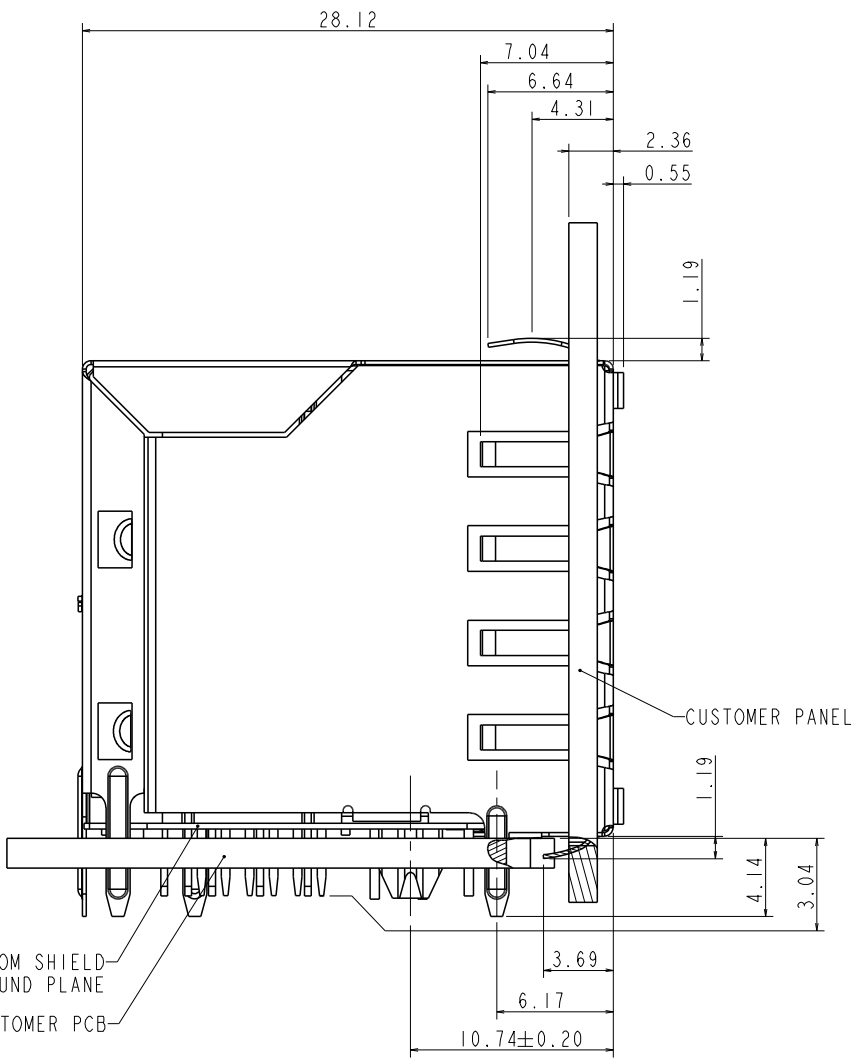


SIDE VIEW SHOWN WITH
PANEL AND PCB
FOR LOCATION

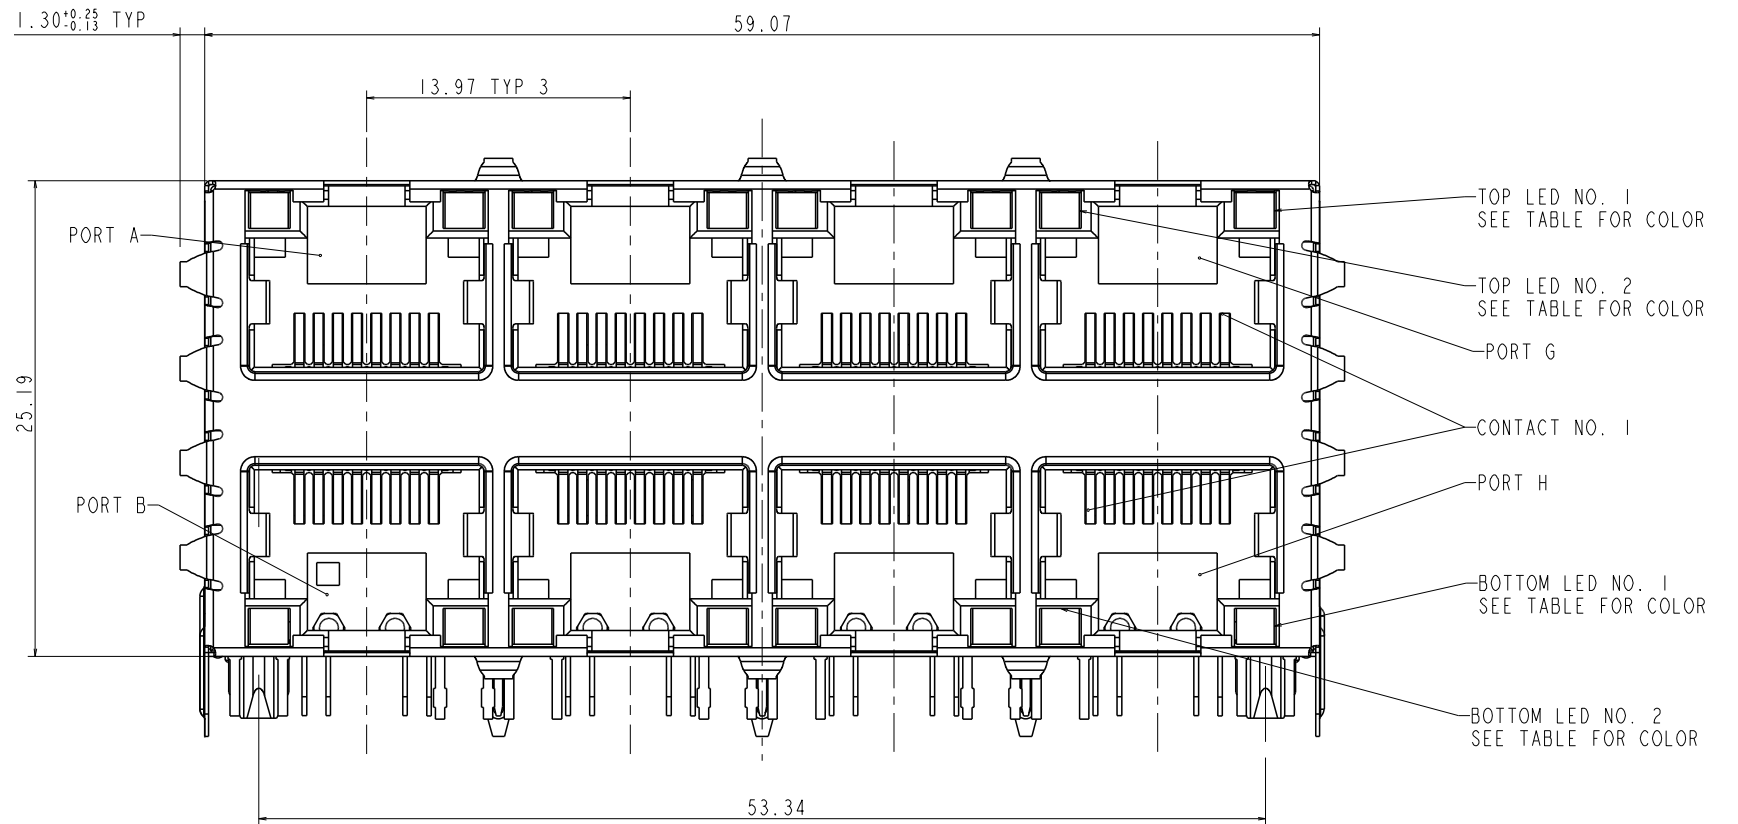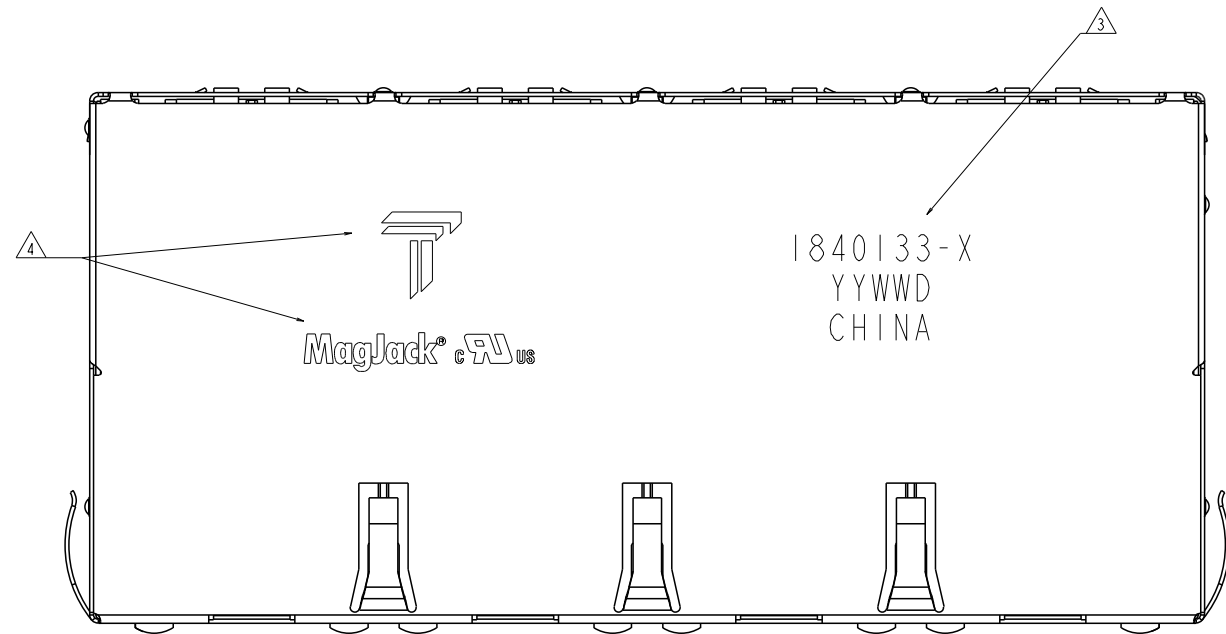



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KEKE YOUTH	19APR2006	 trp CONNECTOR a bel group		DONGGUAN CHINA	
DIMENSIONS:		CHK DENNIS CHEN	19APR2006				
mm		APPD TEDDY XIONG	19APR2006				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		MODEL NAME	DESC				
0 PLC ±0.25		MAGJACK		2X4 S866P9 10/100 W/ LED		RESTRICTED TO	
1 PLC ±0.25		STACK NON-PoE		SIZE CAGE CODE DRAWING NO		-	
2 PLC ±0.25		CUSTOMER DRAWING		A1		REV G	
3 PLC ±0.25		SCALE 4:1		SHEET 2 OF 4		REV G	
4 PLC ±0.25		APPLICATION SPEC		C=1840133		REV G	
ANGLES		CUSTOMER DRAWING		SCALE 4:1		SHEET 2 OF 4	
PRODUCT SPEC		CUSTOMER DRAWING		SCALE 4:1		SHEET 2 OF 4	
108-2100		CUSTOMER DRAWING		SCALE 4:1		SHEET 2 OF 4	

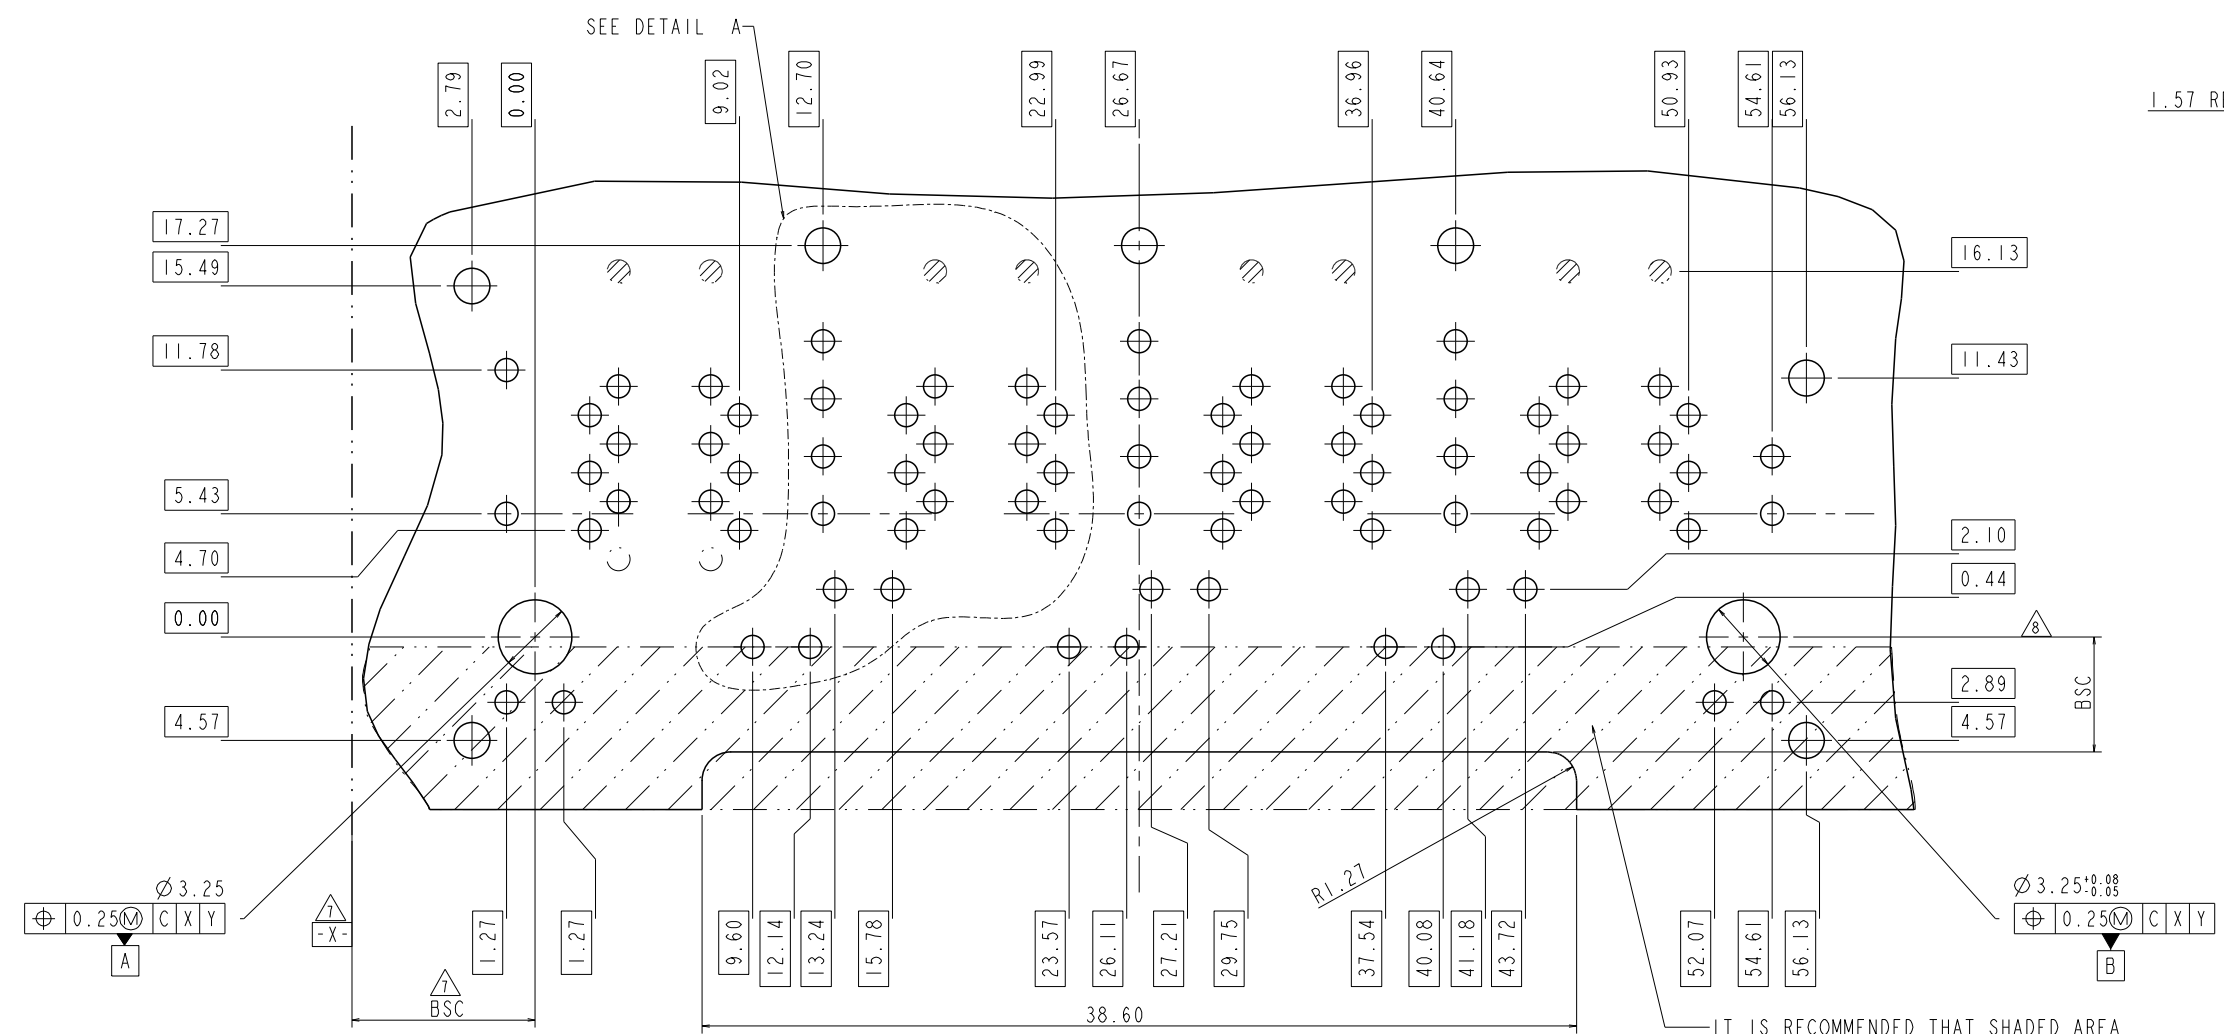

PC BOARD LAYOUT
VIEWED FROM COMPONENT SIDE
SCALE 6:1

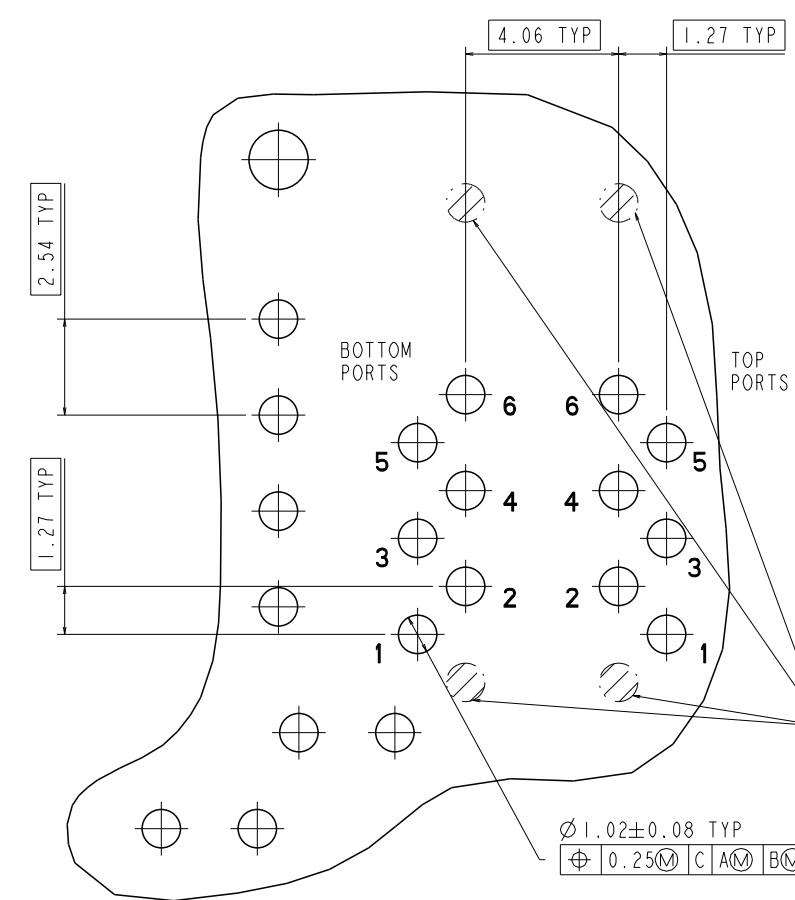


DETAIL A
PIN DESIGNATION
SCALE 10:1

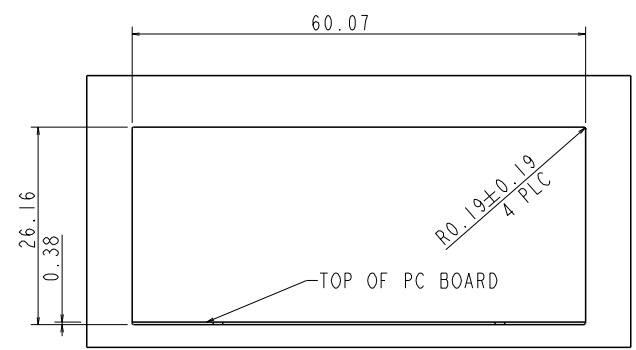
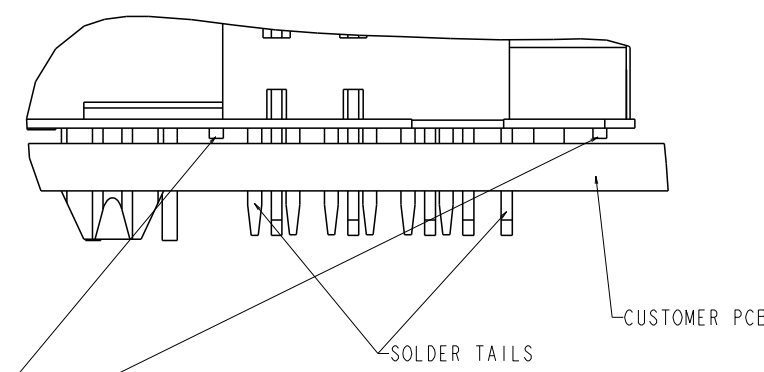


SUGGESTED PANEL CUTOUT DIMENSIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN KEKE YOUTH 19APR2006	 DONGGUAN CHINA	
DIMENSIONS: mm		CHK DENNIS CHEN 19APR2006		
		APPROV TEDDY XIONG 19APR2006		
PRODUCT SPEC 108-2100		MODEL NAME MAGJACK STACK NON-PoE		
TOLERANCES UNLESS OTHERWISE SPECIFIED: mm		DESC 2X4 S86P9 10/100 W/ LED	RESTRICTED TO	
0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ±0.25 4 PLC ±0.25		SIZE A1	CAGE CODE 1840133	
ANGLES		SCALE 4:1	SHEET 3 OF 4	
APPLICATION SPEC		CUSTOMER DRAWING	REV G	

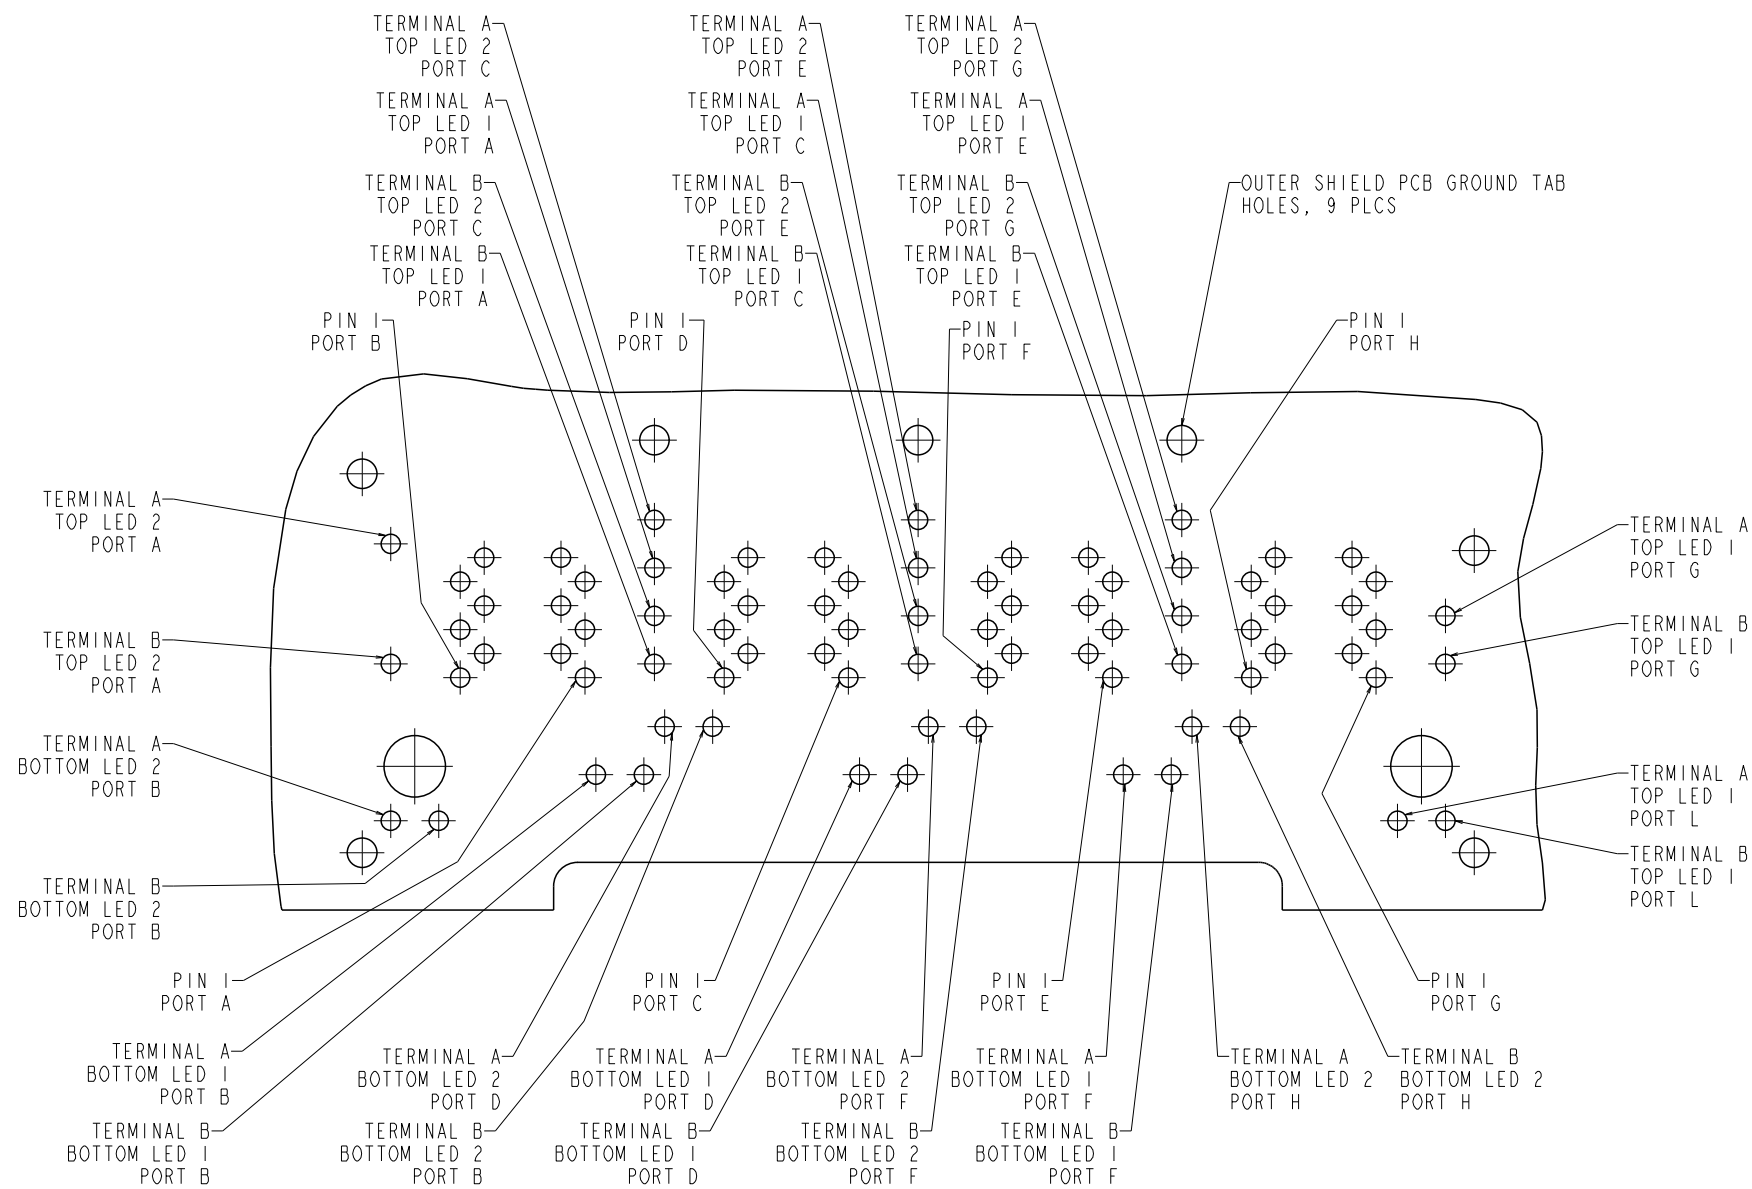

LED HOLE DESIGNATION VIEWED FROM COMPONENT SIDE

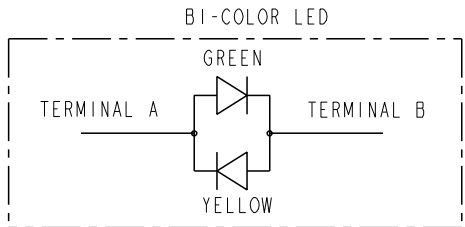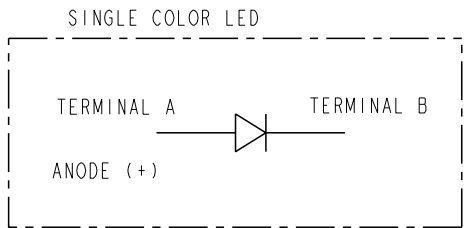

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN KEKE YOUTH	19APR2006	 trp CONNECTOR a bel group		DONGGUAN CHINA	
DIMENSIONS:		CHK DENNIS CHEN	19APR2006				
mm		APVD TEDDY XIONG	19APR2006				
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MODEL NAME		DESC	
		0 PLC ±0.25		MAGJACK		2X4 S866P9 10/100 W/ LED	
		1 PLC ±0.25		STACK NON-PoE		SIZE CAGE CODE DRAWING NO	
		2 PLC ±0.25		A1		C=1840133	
		3 PLC ±0.25		CUSTOMER DRAWING		RESTRICTED TO	
		4 PLC ±0.25				-	
		ANGLES				SCALE 4:1	
PRODUCT SPEC		APPLICATION SPEC				SHEET 4 OF 4	
108-2100						REV G	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru