

HEIDI-M


~25° medium beam

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 21.6 mm
Height	11.9 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
HEIDI-M	Single lens	PMMA		
HEIDI-TAPE	Tape	PU tape		

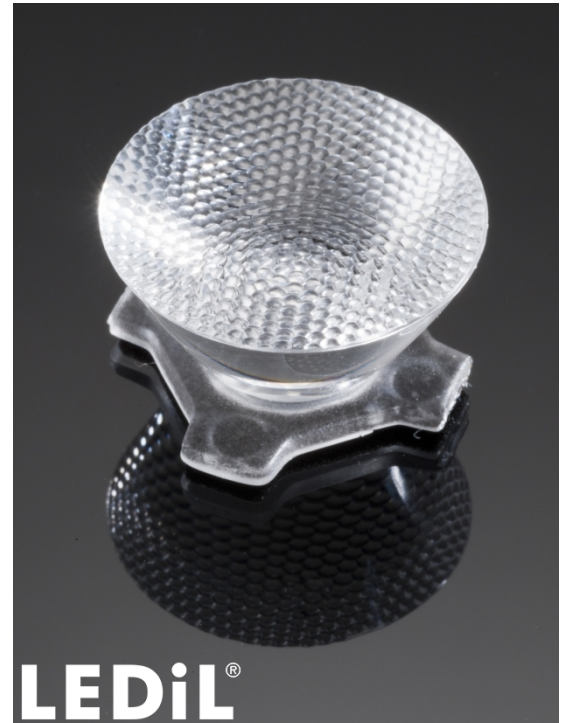

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA11265_HEIDI-M	Single lens	3264	204	204	10.8
» Box size: 480 x 280 x 300 mm					

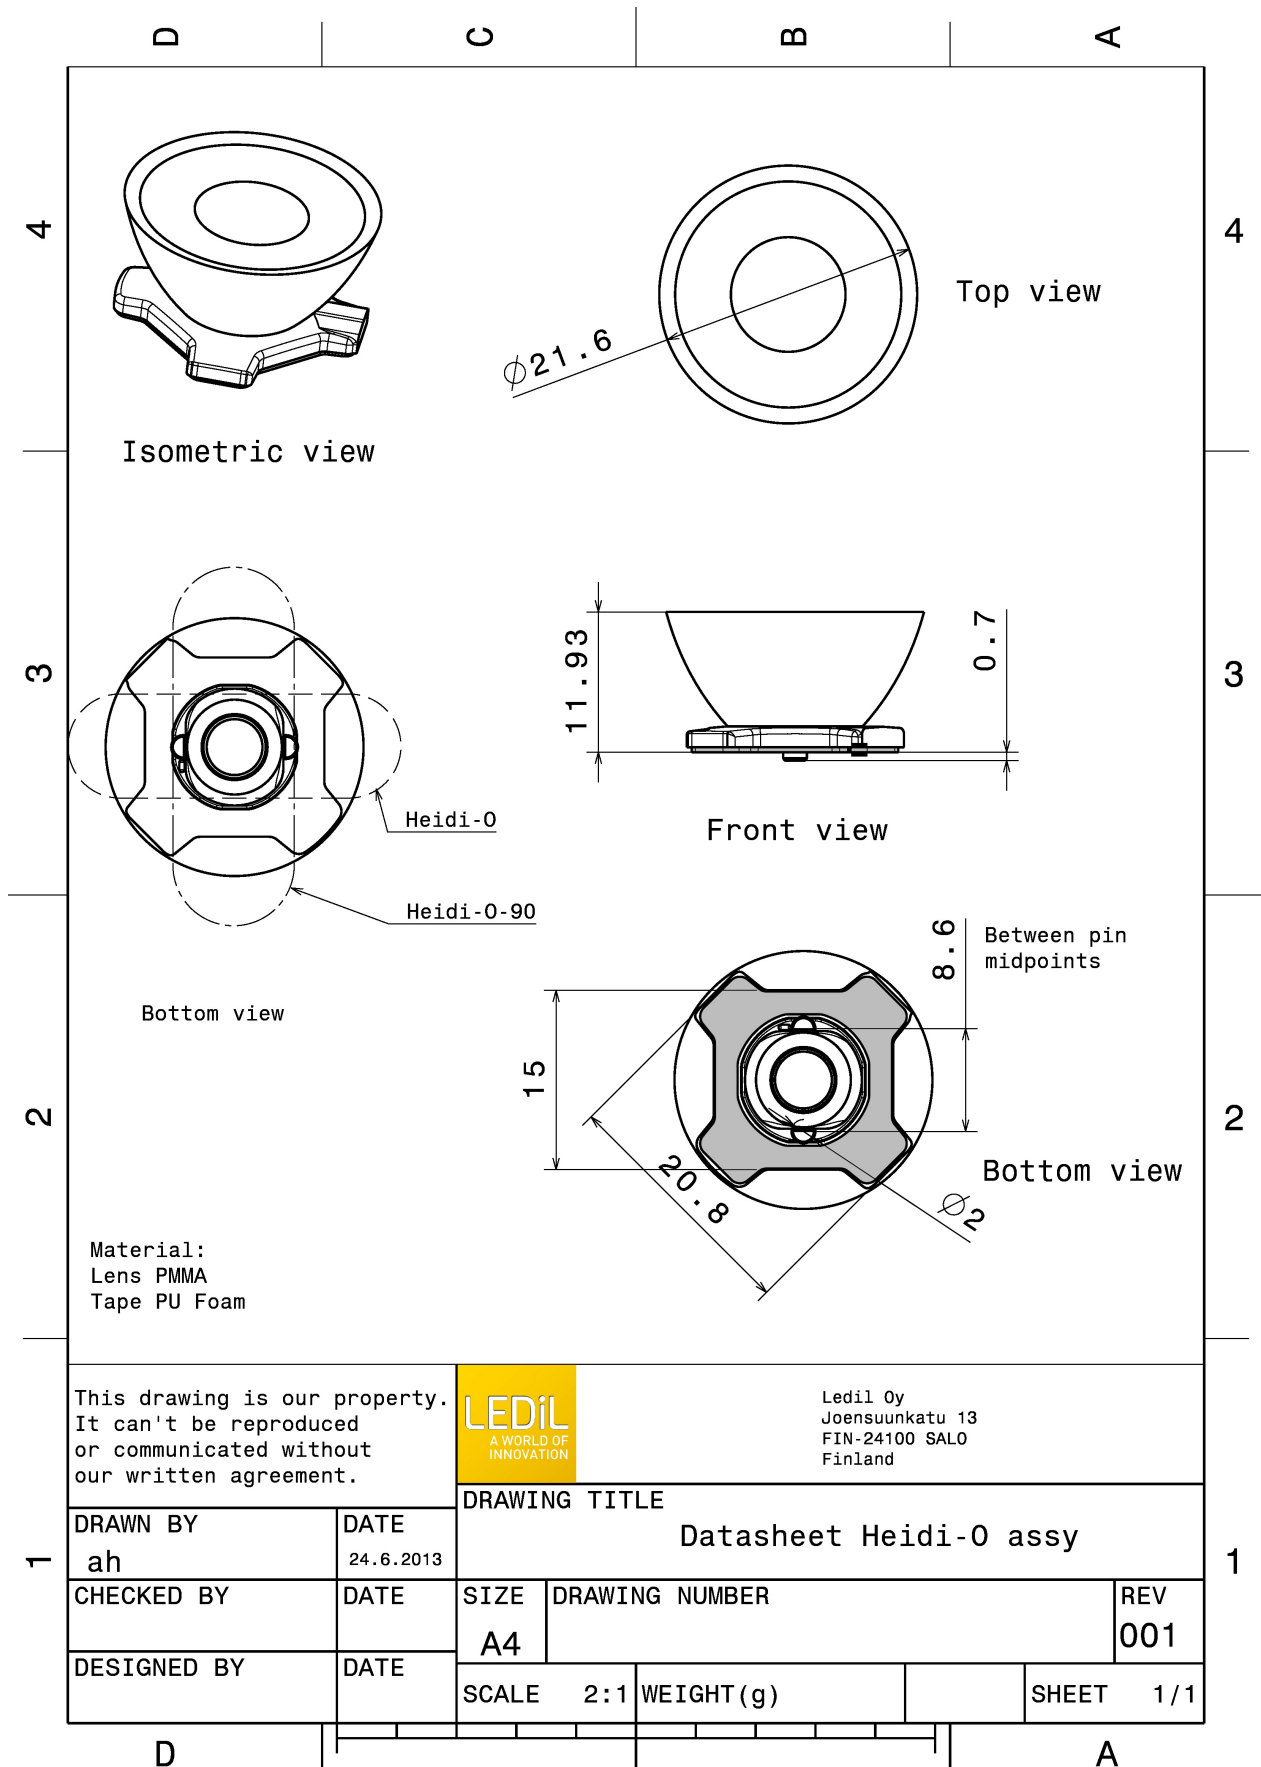


PHOTOMETRIC DATA (MEASURED):

CREE ⇄

LED XB-D
FWHM 29.0°
Efficiency 87 %
Peak intensity 2.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:

CREE ⇄

LED XB-H
FWHM 27.0°
Efficiency 87 %
Peak intensity 3.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

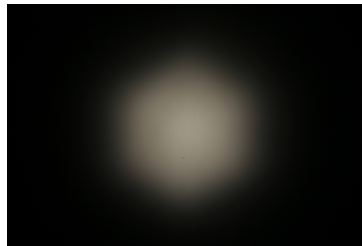

CREE ⇄

LED XP-E
FWHM 28.0°
Efficiency 92 %
Peak intensity 2.860 cd/lm
LEDs/each optic 1
Light colour White
Required components:


CREE ⇄

LED XP-G
FWHM 28.0°
Efficiency 92 %
Peak intensity 3.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHOTOMETRIC DATA (MEASURED):





LED XQ-E HD
FWHM 26.0°
Efficiency 94 %
Peak intensity 4.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

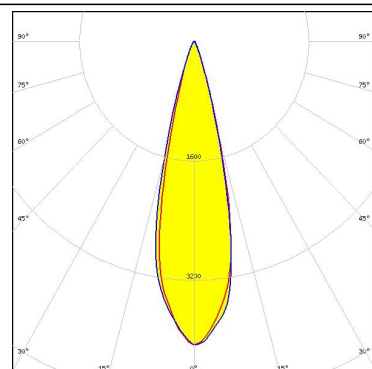



LED XQ-E HI
FWHM 25.0°
Efficiency 94 %
Peak intensity 4.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

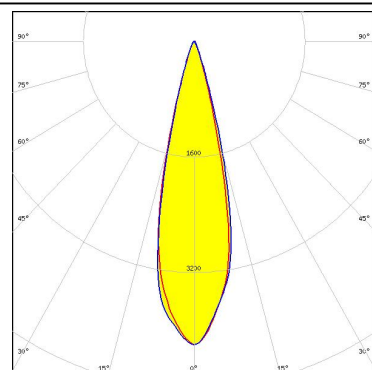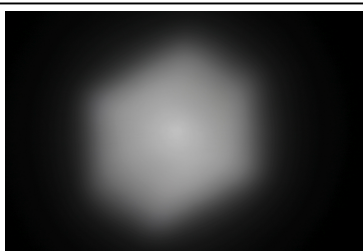

LED LUXEON C
FWHM 26.0°
Efficiency 87 %
Peak intensity 3.950 cd/lm
LEDs/each optic 1
Light colour White
Required components:

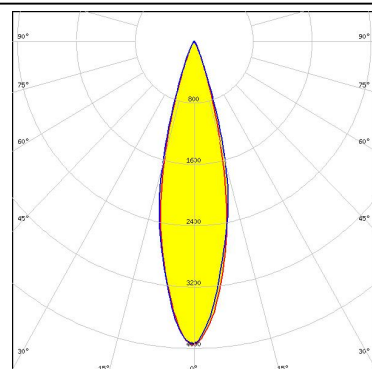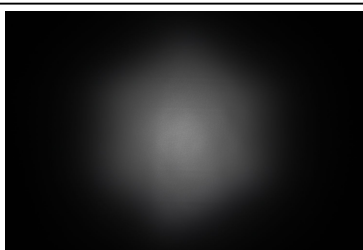


LED LUXEON CZ
FWHM 26.0°
Efficiency 94 %
Peak intensity 4.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

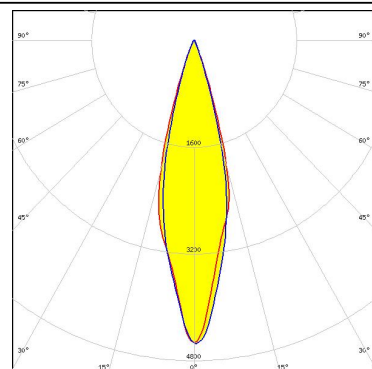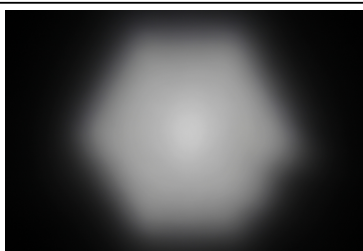



PHOTOMETRIC DATA (MEASURED):




LED LUXEON T
FWHM 28.0°
Efficiency 87 %
Peak intensity 3.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

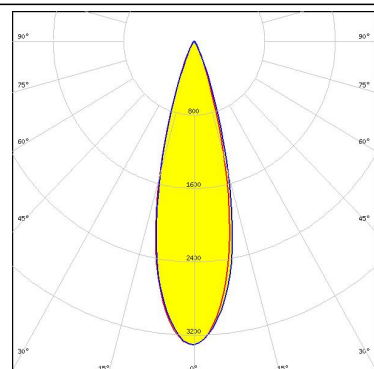



LED LUXEON TX
FWHM 29.0°
Efficiency 88 %
Peak intensity 3.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

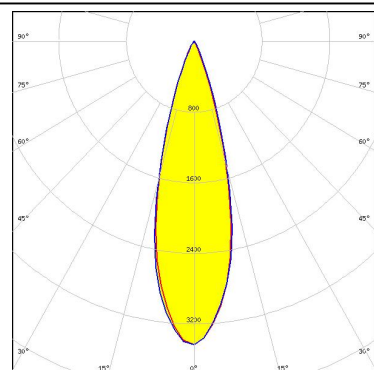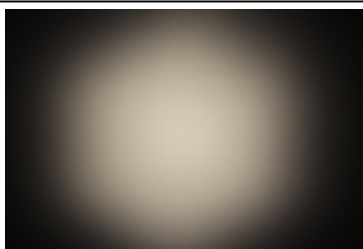

LED NCSxx19A
FWHM 26.0°
Efficiency 87 %
Peak intensity 3.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:



LED NCSxx19B
FWHM 29.0°
Efficiency 88 %
Peak intensity 3.700 cd/lm
LEDs/each optic 1
Light colour White
Required components:

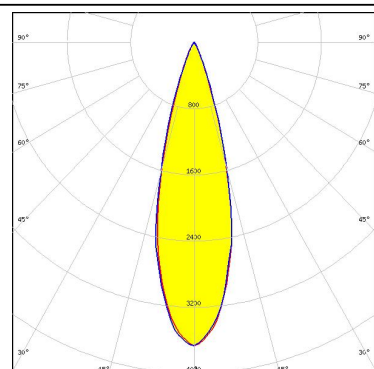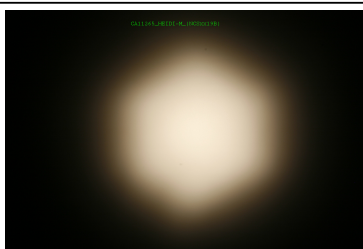


PHOTOMETRIC DATA (MEASURED):



LED NVSxx19A
FWHM 28.0°
Efficiency 87 %
Peak intensity 3.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:



LED NVSxx19B/NVSxx19C
FWHM 28.0°
Efficiency 90 %
Peak intensity 3.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

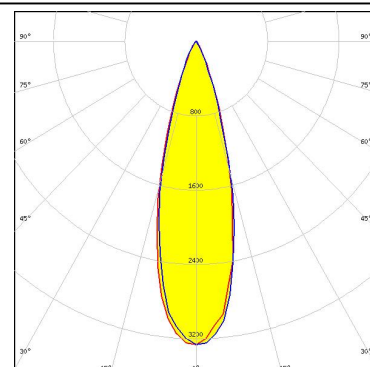

Opto Semiconductors

LED OSLOM SSL 150
FWHM 26.0°
Efficiency 90 %
Peak intensity 3.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:





Opto Semiconductors

LED OSLOM SSL 80
FWHM 28.0°
Efficiency 87 %
Peak intensity 3.130 cd/lm
LEDs/each optic 1
Light colour White
Required components:

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo FastFlex 2x8 DS G3
FWHM 25.0°
Efficiency 90 %
Peak intensity 4.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:

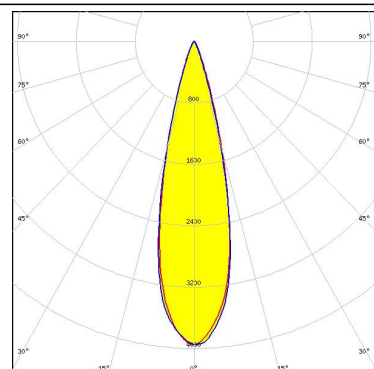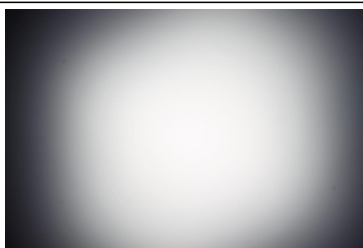



SAMSUNG

LED LH181A
FWHM 27.0°
Efficiency 88 %
Peak intensity 2.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

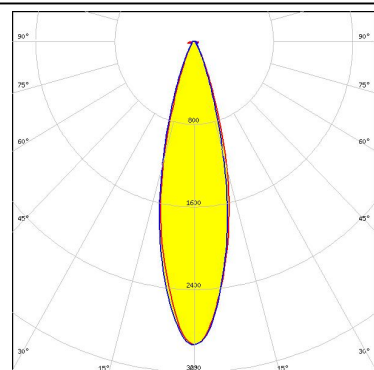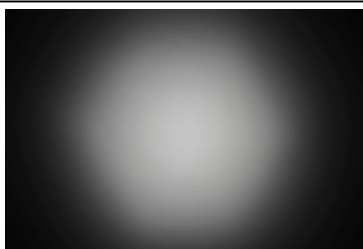

SAMSUNG

LED LH181B
FWHM 27.0°
Efficiency 93 %
Peak intensity 3.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

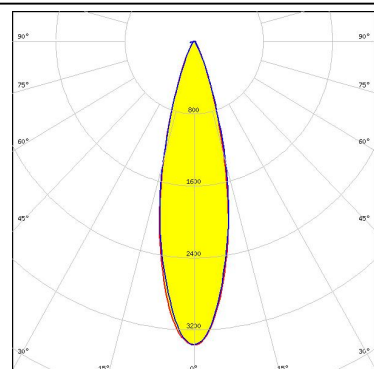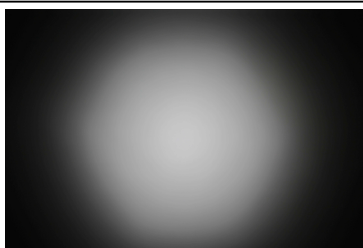



SEOUL SEMICONDUCTOR

LED Z5
FWHM 28.0°
Efficiency 87 %
Peak intensity 3.670 cd/lm
LEDs/each optic 1
Light colour White
Required components:

PHOTOMETRIC DATA (MEASURED):

SEOUL SEMICONDUCTOR


LED Z5M1/Z5M2
FWHM 29.0°
Efficiency 89 %
Peak intensity 3.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

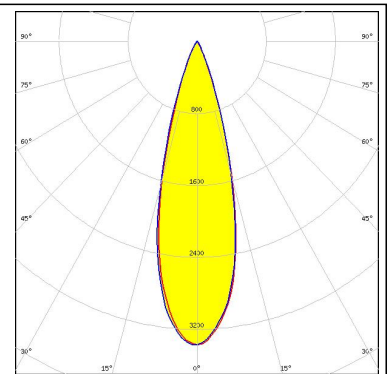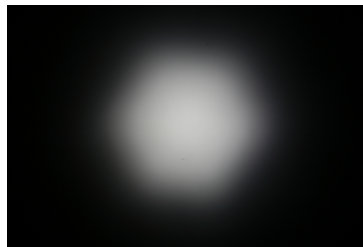


PHOTOMETRIC DATA (SIMULATED):




LED XB-D
FWHM 28.0°
Efficiency 93 %
Peak intensity 3.794 cd/lm
LEDs/each optic 1
Light colour White
Required components:

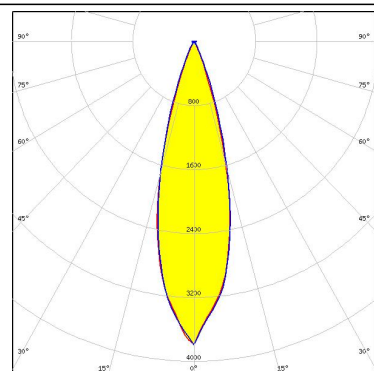


LED XT-E
FWHM 28.0°
Efficiency 93 %
Peak intensity 3.700 cd/lm
LEDs/each optic 1
Light colour White
Required components:

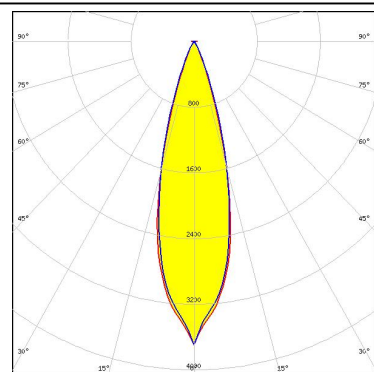

LED LUXEON SunPlus 20 Line (150 deg)
FWHM 28.0°
Efficiency 91 %
Peak intensity 3.670 cd/lm
LEDs/each optic 1
Light colour White
Required components:

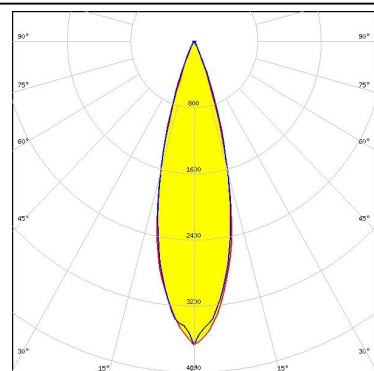


LED LUXEON Z ES
FWHM 28.0°
Efficiency 94 %
Peak intensity 4.050 cd/lm
LEDs/each optic 1
Light colour White
Required components:

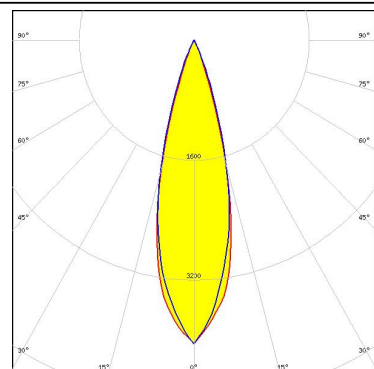


PHOTOMETRIC DATA (SIMULATED):




LED NVSxx19B/NVSxx19C
FWHM 28.0°
Efficiency 94 %
Peak intensity 3.321 cd/lm
LEDs/each optic 1
Light colour White
Required components:

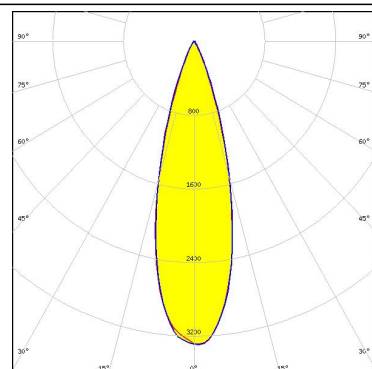

LED OSCONIQ P 3030
FWHM 28.0°
Efficiency 96 %
Peak intensity 3.841 cd/lm
LEDs/each optic 1
Light colour White
Required components:

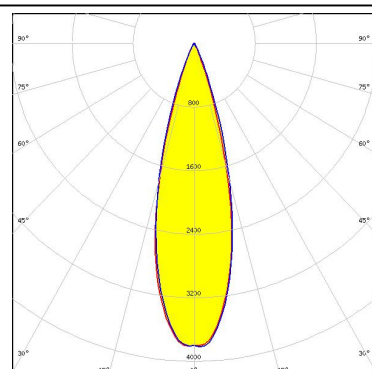

LED OSLON Square CSSRM2/CSSRM3
FWHM 28.0°
Efficiency 94 %
Peak intensity 3.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

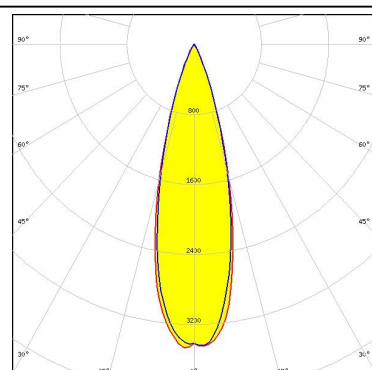


LED OSLON Square EC
FWHM 29.0°
Efficiency %
Peak intensity 3.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

PHOTOMETRIC DATA (SIMULATED):

OSRAM
Opto Semiconductors

LED OSLON SSL 80
FWHM 29.0°
Efficiency 96 %
Peak intensity 3.696 cd/lm
LEDs/each optic 1
Light colour White
Required components:

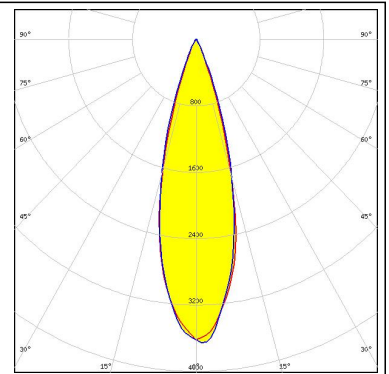

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salu, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru