

# Type CS (Capstick®) Metallized Polymer Network

## Radial Multi-pin Metallized Polymer Network for DC to DC Converters



The Type CS multi-pin metallized polymer network is ideal for the low ESR/ESL requirements in DC to DC converters and switching power supply applications. This unique, robust, capacitor design offers high ripple current capability and high capacitance in a small package. It is available with straight pins on 0.10" centers for through-hole mounting or with gull wing leads for surface mount assembly. Type CS (Capstick®) is encapsulated in a rugged conformal coating and is packaged in anti-static tubes for easy handling.

### Highlights

- ♦ Rugged conformal coated case meets UL94V-0
- ♦ Low ESR/ESL
- ♦ High ripple current
- ♦ High capacitance in a small package
- ♦ Non-inductive design
- ♦ Non-polar
- ♦ Surface mount or through hole assembly
- ♦ Multi-pin leads on 0.10" centers

### Specifications

### RoHS Compliant


|                                                             |                                                                                       |
|-------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Capacitance Range:</b>                                   | 0.33 $\mu$ F to 20.0 $\mu$ F                                                          |
| <b>Voltage Range:</b>                                       | 50 Vdc, 100 Vdc, 250 Vdc, 400 Vdc, 500 Vdc                                            |
| <b>Capacitance Tolerance:</b>                               | $\pm 10\%$                                                                            |
| <b>Operating Temperature Range for 50, 100 and 250 Vdc:</b> | -55 °C to +125 °C (with 50% Vdc derating >85 °C)                                      |
| <b>Operating Temperature Range for 400 and 500 Vdc:</b>     | -55 °C to +125 °C with no derating                                                    |
| <b>Construction:</b>                                        | Multilayer metallized polymer dielectric                                              |
| <b>Temperature Coefficient:</b>                             | +6% from -55 °C to +85 °C                                                             |
| <b>Dielectric Withstand Voltage:</b>                        | 1.3 x rated voltage: 50/100/250/500 Vdc<br>1.6 x rated voltage: 400 Vdc               |
| <b>Dissipation Factor (DF):</b>                             | $\leq 1.0\%$ @ 1 kHz                                                                  |
| <b>Total Self Inductance (L):</b>                           | <6 nH typical (CS6)<br><4 nH typical (CS4)                                            |
| <b>Lead Material:</b>                                       | Tinned copper alloy frame                                                             |
| <b>Insulation Resistance:</b>                               | $\geq 1000 \text{ M}\Omega \cdot \mu\text{F}$ - need not exceed 1000 $\text{M}\Omega$ |

### Part Numbering System

|                            |                  |                |               |                    |                       |
|----------------------------|------------------|----------------|---------------|--------------------|-----------------------|
| <b>405</b>                 | <b>K</b>         | <b>100</b>     | <b>CS</b>     | <b>4</b>           | <b>G</b>              |
|                            |                  |                |               |                    |                       |
| <b>Cap</b>                 |                  |                |               | <b>Pin</b>         | <b>"Optional"</b>     |
| <b>(<math>\mu</math>F)</b> | <b>Tolerance</b> | <b>Voltage</b> | <b>Series</b> | <b>Spacing</b>     | <b>(.)</b>            |
| 334 = 0.33 $\mu$ F         | K = $\pm 10\%$   | 050 = 50 Vdc   | CS            | 4 = 0.4" (10.0 mm) | Blank = Straight Pins |
| 405 = 4.0 $\mu$ F          |                  | 100 = 100 Vdc  |               | 6 = 0.6" (15.0 mm) | G = Gull Wing         |
| 206 = 20.0 $\mu$ F         |                  | 400 = 400 Vdc  |               |                    |                       |

# Type CS (Capstick®) Metallized Polymer Network

## Capacitor Outline Drawing

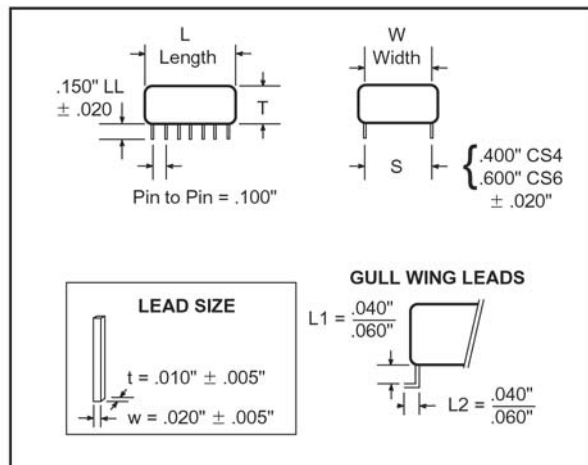

## Test Method and Performance

| Accelerated Dry Life                |                                                                           |
|-------------------------------------|---------------------------------------------------------------------------|
| <b>Test Conditions</b>              |                                                                           |
| Temperature:                        | +85 °C ±5 °C                                                              |
| Applied Voltage:                    | 1.25 x rated voltage                                                      |
| Test Duration:                      | 1000 hours performance                                                    |
| <b>Requirements</b>                 |                                                                           |
| Capacitance :                       | Change of ≤5.0%                                                           |
| Dissipation Factor:                 | ≤1.0% @ 1 kHz                                                             |
| Insulation Resistance:              | ≥1K MΩ • μF, need not exceed 1 K MΩ                                       |
| Humidity                            |                                                                           |
| <b>Test Conditions</b>              |                                                                           |
| Temperature:                        | +85 °C ±2.0 °C                                                            |
| Applied Voltage:                    | Zero voltage                                                              |
| Humidity:                           | 85% ±2% RH                                                                |
| Test Duration:                      | 21 days                                                                   |
| <b>Performance Requirements</b>     |                                                                           |
| Capacitance                         | Change of ≤7.0%                                                           |
| Dissipation Factor                  | ≤1.0% @ 1 kHz                                                             |
| Insulation Resistance               | ≥ 30% of limit value                                                      |
| Soldering                           |                                                                           |
| <b>Test Conditions</b>              |                                                                           |
| Soldering Temperature:              | +250 °C ±5 °C                                                             |
| Soldering Duration:                 | 5 sec ±1 sec                                                              |
| <b>Performance Requirements</b>     |                                                                           |
| Capacitance:                        | Change of ≤ ±2%                                                           |
| Capacitance Drift:                  | ≤2.0% over 2 years between 0 °C and 35 °C and a RH of between 35% and 65% |
| <b>Vibration</b>                    |                                                                           |
| Conforms to MIL-STD-202 Method 204D |                                                                           |

**Note:** The 400 Vdc rating can handle a 450 Vdc surge and is built to a 640 Vdc high potential.

## Ratings

RoHS Compliant

| Catalog Part Number | Cap (μF) | DC Voltage | ESR Ω @ 500 kHz | RMS Current @ 500 kHz | W Max. Inches (mm) | T Max. Inches (mm) | L Max. Inches (mm) | Nom. L.S. Inches (mm) | Leads Per Side | Tube Quantity |
|---------------------|----------|------------|-----------------|-----------------------|--------------------|--------------------|--------------------|-----------------------|----------------|---------------|
| <b>50 Vdc</b>       |          |            |                 |                       |                    |                    |                    |                       |                |               |
| 106K050CS4*         | 10.00    | 50         | 0.0030          | 15.3                  | 0.5 (12.7)         | 0.32 (8.1)         | 0.620 (15.7)       | 0.4 (10)              | 5              | 32            |
| 156K050CS4*         | 15.00    | 50         | 0.0027          | 16.7                  | 0.5 (12.7)         | 0.32 (8.1)         | 0.880 (22.4)       | 0.4 (10)              | 7              | 22            |
| 206K050CS4*         | 20.00    | 50         | 0.0025          | 17.8                  | 0.5 (12.7)         | 0.32 (8.1)         | 1.150 (29.2)       | 0.4 (10)              | 9              | 16            |
| <b>100 Vdc</b>      |          |            |                 |                       |                    |                    |                    |                       |                |               |
| 405K100CS4*         | 4.00     | 100        | 0.007           | 11.5                  | 0.5 (12.7)         | 0.25 (6.4)         | 0.450 (11.4)       | 0.4 (10)              | 3              | 44            |
| 475K100CS4*         | 4.70     | 100        | 0.006           | 12.2                  | 0.5 (12.7)         | 0.25 (6.4)         | 0.525 (13.3)       | 0.4 (10)              | 3              | 38            |
| 685K100CS4*         | 6.80     | 100        | 0.005           | 13.7                  | 0.5 (12.7)         | 0.25 (6.4)         | 0.700 (17.8)       | 0.4 (10)              | 5              | 35            |
| 106K100CS4*         | 10.00    | 100        | 0.003           | 15.3                  | 0.5 (12.7)         | 0.25 (6.4)         | 0.995 (25.3)       | 0.4 (10)              | 7              | 20            |
| <b>250 Vdc</b>      |          |            |                 |                       |                    |                    |                    |                       |                |               |
| 105K250CS6*         | 1.00     | 250        | 0.012           | 5.2                   | 0.7 (17.8)         | 0.30 (7.6)         | 0.440 (11.2)       | 0.6 (15)              | 3              | 44            |
| <b>400 Vdc</b>      |          |            |                 |                       |                    |                    |                    |                       |                |               |
| 334K400CS6*         | 0.33     | 400        | 0.012           | 6.0                   | 0.7 (17.8)         | 0.32 (8.1)         | 0.435 (11.0)       | 0.6 (15)              | 3              | 44            |
| 474K400CS6*         | 0.47     | 400        | 0.011           | 6.2                   | 0.7 (17.8)         | 0.32 (8.1)         | 0.460 (11.7)       | 0.6 (15)              | 3              | 42            |
| 105K400CS6*         | 1.00     | 400        | 0.008           | 9.5                   | 0.7 (17.8)         | 0.32 (8.1)         | 0.880 (22.4)       | 0.6 (15)              | 7              | 22            |
| <b>500 Vdc</b>      |          |            |                 |                       |                    |                    |                    |                       |                |               |
| 474K500CS6*         | 0.47     | 500        | 0.011           | 6.2                   | 0.7 (17.8)         | 0.32 (8.1)         | 0.625 (15.9)       | 0.6 (15)              | 4              | 32            |
| 105K500CS6*         | 1.00     | 500        | 0.008           | 9.5                   | 0.7 (17.8)         | 0.32 (8.1)         | 1.135 (28.8)       | 0.6 (15)              | 8              | 16            |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)