


Molded, Commercial, Single In-Line Resistor Network (Standard)

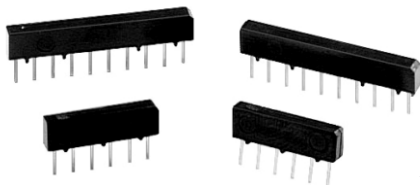

Actual Size

Designed To Meet MIL-PRF-83401 Characteristic "V" and "H"

These resistor networks are available in 6, 8 and 10 pin styles in both standard and custom circuits. They incorporate VISHAY Thin Film's patented Passivated Nichrome film to give superior performance on temperature coefficient of resistance, thermal stability, noise, voltage coefficient, power handling and resistance stability. The leads are attached to the metallized alumina substrates by Thermo-Compression bonding. The body is molded thermoset plastic with gold plated copper alloy leads. This product will outperform all of the requirements of characteristic "V" and "H" of MIL-PRF-83401.

FEATURES

- Lead (Pb)-free available
- Rugged molded case 6, 8, 10 pins
- Thin Film element
- Excellent TCR characteristics (± 25 ppm/ $^{\circ}\text{C}$)
- Gold to gold terminations (no internal solder)
- Exceptional stability over time and temperature (500 ppm at + 70 $^{\circ}\text{C}$ at 2000 hours)
- Internally passivated elements
- Compatible with automatic insertion equipment
- Standard circuit designs




RoHS*
COMPLIANT

TYPICAL PERFORMANCE


	ABS	TRACKING
TCR	25	2
	ABS	RATIO
TOL	0.1	0.05

SCHEMATIC


Schematic 01



Schematic 03




Schematic 06



STANDARD ELECTRICAL SPECIFICATIONS


TEST	SPECIFICATIONS	CONDITIONS
Material	Passivated Nichrome	
Resistance Range	100 Ω to 200 k Ω	
TCR:	Tracking	± 2 ppm/ $^{\circ}\text{C}$ (typical less 1 ppm/ $^{\circ}\text{C}$ equal values)
	Absolute	± 25 ppm/ $^{\circ}\text{C}$ standard
Tolerance:	Ratio	± 0.05 % to ± 0.1 % to R1
	Absolute	± 0.1 % to ± 1.0 %
Power Rating:	Resistor	100 mW per element typical at + 25 $^{\circ}\text{C}$
	Package	0.5 W
Stability:	ΔR Absolute	500 ppm
	ΔR Ratio	150 ppm
Voltage Coefficient	< 0.1 ppm/V	
Working Voltage	100 V	
Operating Temperature Range	- 55 $^{\circ}\text{C}$ to + 125 $^{\circ}\text{C}$	
Storage Temperature Range	- 55 $^{\circ}\text{C}$ to + 125 $^{\circ}\text{C}$	
Noise	< - 30 dB	
Thermal EMF	< 0.08 $\mu\text{V}/^{\circ}\text{C}$	
Shelf Life Stability:	Absolute	< 100 ppm
	Ratio	20 ppm

* Pb containing terminations are not RoHS compliant, exemptions may apply

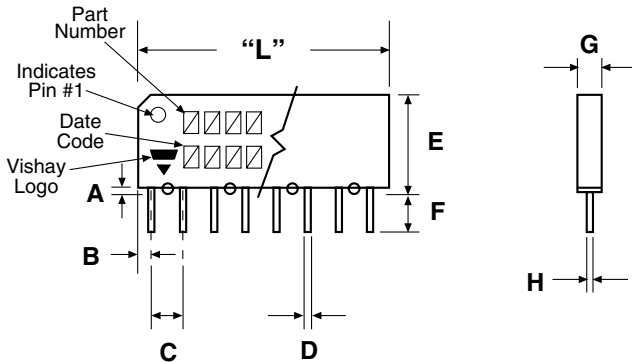DIMENSIONS AND IMPRINTING in inches and millimeters


"L" DIMENSION	INCHES	MM
A	0.035	0.89
B	0.040	1.02
C	0.100 ± 0.005 non-accum.	2.54 ± 0.13
D	0.019 ± 0.006 typical	0.48 ± 0.15
E	0.187 ± 0.010	4.75 ± 0.25
F	0.135	3.43
G	0.095	2.41
H	0.012 ± 0.004	0.31 ± 0.10

NUMBER OF PINS	6	8	10
"L" Dimensions	0.583 ± 0.015	0.783 ± 0.015	0.983 ± 0.015
(mm)	(14.81 ± 0.38)	(19.89 ± 0.38)	(24.97 ± 0.38)

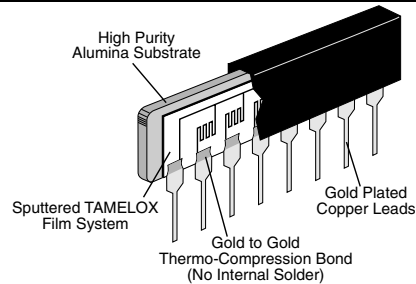CONSTRUCTION

MECHANICAL SPECIFICATIONS

Resistive Element	Passivated Nichrome
Substrate Material	Alumina
Body Molded Epoxy	Terminals Copper Alloy
Plating	Nickel/Gold
Marking Resistance to Solvents	per MIL-PRF-83401
Lead (Pb)-free Option	96.5 % Sn, 3.0 % Ag, 0.5 % Cu
Lead (Pb)-free Finish	Hot Solder Dip

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: TSP6011002BUF (preferred part number format)

T	S	P	6	0	1		1	0	0	2	B	U	F		
T	S	P	S	1	0	0	1		1	0	0	2	C	U	F
GLOBAL MODEL (3 or 4 digits)		PIN COUNT (1 or 2 digits)		SCHEMATICS		TCR CHARACTERISTICS		RESISTANCE		TOLERANCE AND RATIO TOLERANCE			PACKAGING		
TSP (Tin Lead)		6		01 = 5, 7 or 9 resistors with Pin 1 common		*R = ± 25 ppm/°C		First 3 digits are significant figures and the last digit specifies the number of zeroes to follow. e.g: 1001 = 1K 1002 = 10K		Absolute *A = 0.1 % B = 0.1 % C = 0.25 % D = 0.5 % F = 1.0 % *Z = 0.1 %			Ratio 0.05 % 0.1 % 0.1 % 0.1 % 0.5 % 0.025 %		
TSPS (Lead (Pb)-free) (e1)		8		03 = 3, 4 or 5 isolated resistors		H = ± 50 ppm/°C									
		10		06 = 5, 7 or 9 series connected		K = ± 100 ppm/°C									
						*01 Schematic greater than 250 Ω only									
Tolerance and Ratio Tolerance: * Tol. available on 1K and up only. R1 is reference resistor.															
Historical Part Number example: TSP803R1001F (will continue to be accepted)															
TSP		8		03		R		1001		F					
SERIES		PINS		SCHEMATIC		TCR CHARACTERISTIC		RESISTANCE		TOLERANCE AND RATIO TOLERANCE					



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru