


# ISS-102 SERIES

## Two-Channel Intrinsically Safe Switch



### Wiring Diagrams

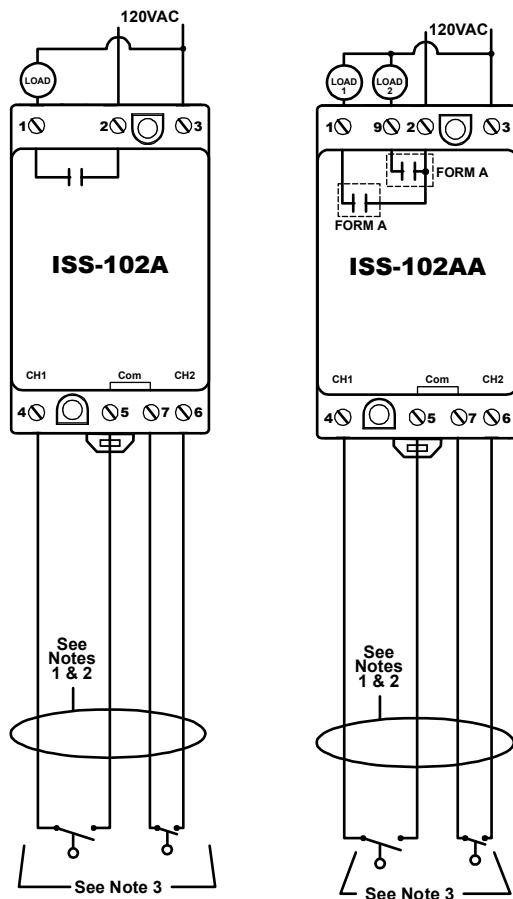

### Description

The ISS-102 is a two-channel, intrinsically-safe switch designed for multiple uses including a pump-up/pump-down (latching) controller or two-channel switch. LEDs indicate the state of the intrinsically-safe inputs and output relays and user-selectable options are available including a variable resistance threshold for float inputs. The ISS-102 enclosure is surface or DIN rail mountable.

**-LC** Each input channel is active when the corresponding switch is closed. When the lag input (CH2) is activated, the output closes. Applying latching logic, the output contact remains closed until the lead (CH1) and the lag (CH2) inputs are deactivated. Sensitivity is fixed at 100kOhms with a debounce time delay of 2 seconds.

**-DCS** This dual-channel switch has two Form A output relays. Two LEDs illuminate the output state of their respective Form A relay. Resistance probes or switches can be used on its inputs. Sensitivity is fixed at 100kOhms with a debounce time delay of 0.5 seconds.

**-MC** By selecting the proper functionality through the DIP switches, you can define a pump-up or pump-down, single or dual channel non-latching switch. The sensitivity adjustment (4.7k-100kOhms) allows you to define the input impedance at which the output relays (one Form A & one Form C) will change state, with a debounce time delay of 0.5 or 2 seconds.

### Features & Benefits

FEATURES	BENEFITS
<b>Finger-safe terminals</b>	Meets IEC 61000 safety requirements
<b>Compact design for DIN rail or surface mount</b>	Allows flexibility in panel installation
<b>LED status indicator</b>	Visual indication of relay engagement
<b>Two input channels</b>	Flexibility for pump up/pump down latching controller or two-channel switch applications

### Ordering Information


MODEL	LINE VOLTAGE	DESCRIPTION
ISS-102A-LC	120VAC	Latching Controller
ISS-102AA-DCS	120VAC	Dual Channel Switch
ISS-102ACI-MC	120VAC	Multi-function Controller
ISS-102C-M-LC	120VAC	MSHA* evaluated
ISS-102CCI-M-MC	120VAC	MSHA* evaluated

\* Mine Safety and Health Administration

For more wiring diagrams and notes, see next page.

# ISS-102 SERIES

## Wiring Diagrams (continued)

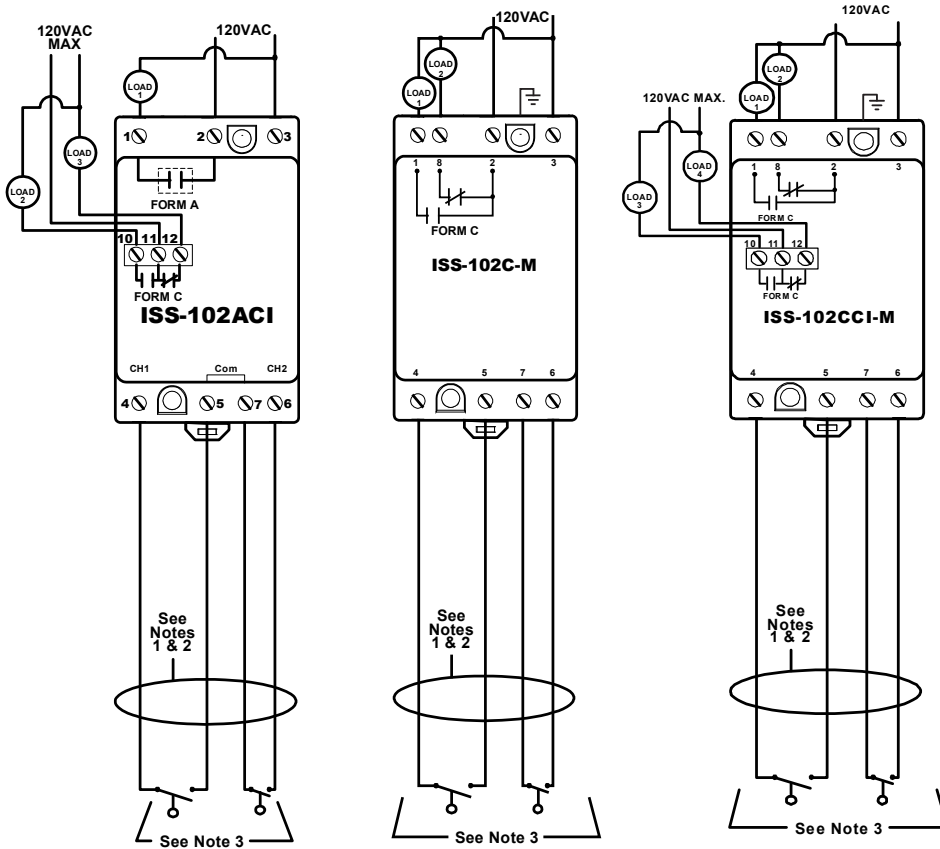

**NOTES:**

1. Maximum distance between unit and switch contact is 10,000 feet.
2. All non-intrinsically-safe wiring shall be separated from intrinsically-safe wiring. Description of special wiring methods can be found in the National Electrical Code ANSI/NFPA 70, Article 504 Intrinsically-Safe Systems. Check your state and local codes for additional requirements.
3. All switch contacts shall be non-energy storing, containing no inductance or capacitance.

## Specifications

### Functional Characteristics

<b>Debounce Time</b>	0.5 or 2 seconds
<b>Probe Sense Voltage</b>	5vdc pulsed

### Output Characteristics

<b>Output Contact Rating</b>	180VA @120VAC, C150
<b>Pilot Duty</b>	5A @120VAC
<b>General Purpose</b>	100,000 cycles min. @ rated load
<b>Relay Contact Life (Electrical)</b>	10,000,000 cycles
<b>Relay Contact Life (Mechanical)</b>	
<b>Output Relay Type</b>	
<b>ISS-102A-LC</b>	One Form A
<b>ISS-102AA-DCS</b>	Two Form A
<b>ISS-102ACI-MC</b>	One Form A & One isolated Form C
<b>ISS-102C-M-LC</b>	One Form C
<b>ISS-102CCI-M-MC</b>	Two Form C (one isolated)

### General Characteristics

<b>Temperature Range</b>	-20° to 55°C (-4° to 131°F)
<b>Maximum Input Power</b>	2 W
<b>Wire Range</b>	12 to 20 AWG
<b>Terminal Torque</b>	3.5 to 4.5 in.-lbs. (max. 4.5 in.-lbs.)

### Provides Intrinsically-Safe Circuits in the following locations:

Division 1 and 2  
Class I, Groups A,B,C,D;  
Class II, Groups E,F,G;  
Class III

### Entity Parameters

$V_{oc} = 16.8V$	$P_o = \frac{V_{oc} \cdot I_{sc}}{4}$
$I_{sc} = 1.2mA$	4
$L_a = 100mH$	
$C_a = 0.39\mu F$	

### Standards Passed

**Electrostatic Discharge (ESD)** IEC 61000-4-2, Level 3, 6kV contact, 8kV air.  
**Radio Frequency Immunity (RFI)** IEC 61000-4-3, Level 3, 10V/m  
**Fast Transients** IEC 61000-4-4, Level 3, 4kV input power

### Safety Mark

### UL

UL913 Sixth Edition (File #E233355)  
(except Models ISS-102C-M-LC & ISS-102CCI-M-MC which have been evaluated by MSHA)

### Dimensions

**H** 88.9 mm (3.5") ; **W** 52.93 mm (2.08") ;  
**D** 59.69 mm (2.35")

### Weight

0.7 lb. (11.2 oz., 317.51 g)

### Mounting Method

35mm DIN rail or Surface Mount  
(#6 or #8 screws)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)