

3M™ Thermally Conductive Silicone Interface Pads 5516 and 5516S


Product Description

3M™ Thermally Conductive Silicone Interface Pads 5516 and 5516S are designed to provide a preferential heat transfer path between heat generating components and heat sinks, heat spreaders or other cooling devices. These products consist of a highly conformable slightly tacky silicone elastomer sheet filled with thermally conductive ceramic particles which provide special features listed as follows.

- Good thermal conductivity and good electrical insulation properties.
- Good softness and conformability even to non-flat surfaces.
- Softness results in low stress on board components.
- “S” version incorporates a thin polymeric film carrier for improved handling and a non-tacky surface for ease of rework.
- Slight tack allows pre-assembly. Good wettability for better thermal conductivity.

Construction

3M™ Thermally Conductive Silicone Interface Pad 5516




Removable Film liner

Thermally conductive silicone elastomer

Removable Film liner

Standard thickness (excludes liner): 0.5 mm, 1.0 mm, 1.5 mm, 2.0 mm

3M™ Thermally Conductive Silicone Interface Pad 5516S



Permanent polymeric film (0.006 mm) carrier

Thermally conductive silicone elastomer

Removable Film liner

Standard thickness (excludes liner): 0.5 mm, 1.0 mm, 1.5 mm, 2.0 mm

Note: Thicknesses greater than 2mm are available. Please consult your local 3M representative for additional details.

3M™ Thermally Conductive Silicone Interface Pads 5516 and 5516S

Typical Physical Properties


Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

3M™ Thermally Conductive Silicone Interface Pads 5516 and 5516S		
Property	Method	Value
Thermal Conductivity (W/mK)	ASTM D5470	3.1
Flammability	UL 94	V-0 (5516 0.5 mm~ & 5516S 1.01 mm~) V-1 (5516S 0.5-1.0 mm)
Density (g/cm ³ , @ 25°C)	—	2.9
Hardness	Shore 00 ^{Note 1}	5516 @ 50 5516S @ 72
Volume Resistivity (Ω-cm)	ASTM D257	6.9 x 10 ¹⁴
Dielectric Strength (kV/mm)	ASTM D149	3.2 (5516S = 5.2 est.)
Dielectric Constant	ASTM D150	11.0 (1-100 kHz)

Notes:

1) Shore 00 Test Method based on a 6mm thick sample. Results will vary for different thickness samples.

Compression vs. Stress

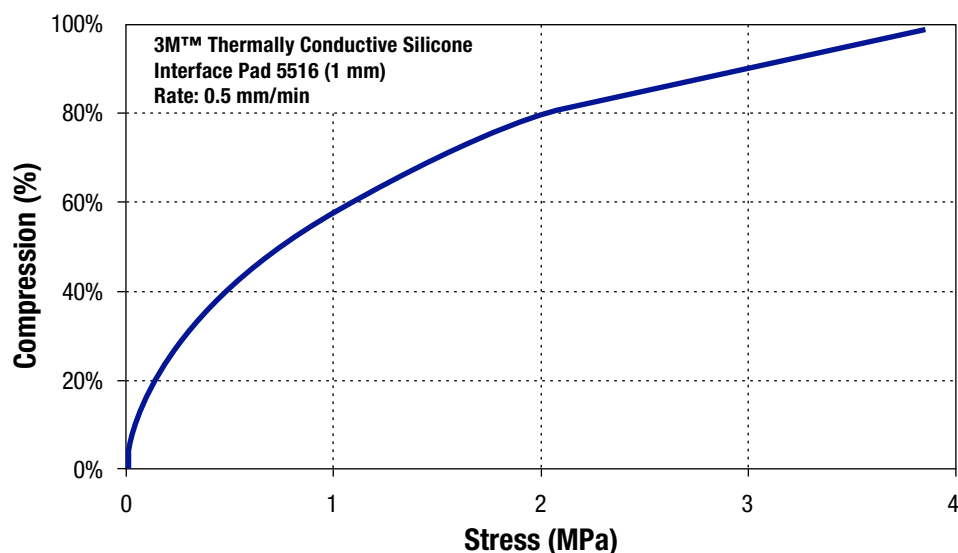

Note: Compression vs Stress test results can vary between test methods based on sample size, exact test set-up, equipment type, etc.

Environmental Aging Data

Heat resistance of 1.0 mm 3M™ Thermally Conductive Silicone Interface Pad 5516

Duration (hrs)	Initial	500	1000	3000
Thermal Conductivity (W/mK)	2.8	2.8	2.8	2.8
Hardness (Shore 00)	49	50	50	50
Appearance	—	No effect	No effect	No effect

Aged at 130°C in high temperature chamber.

Note: Thermal Conductivity for aging tested using the QTM-500 Hot Wire Test Method. Values can differ from an ASTM-D5470 TM due to TM differences.

3M™ Thermally Conductive Silicone Interface Pads 5516 and 5516S

Shelf Life

Product shelf life is 24 months from date of manufacture when stored at room temperature conditions (23-25°C & 50% RH) and in the products original packaging.

Certification/Recognition

MSDS: 3M has not prepared a MSDS for these products which are subject to the MSDS requirements of the Occupational Safety and Health Administration's Hazard Communication Standard, 29 C.F.R. 1910.1200(b)(6)(v). When used under reasonable conditions or in accordance with the 3M directions for use, these products should not present a health and safety hazard. However, use or processing of these products in a manner not in accordance with the directions for use may affect their performance and present potential health and safety hazards.

TSCA: These products are defined as an article under the Toxic Substances Control Act and therefore, are exempt from inventory listing requirements.

RoHs Compliant/REACH Compliant: These products comply with the European Union's "Restriction of Hazardous Substances" (RoHs) initiative and with European REACH regulations 2002/95/EC and 2005/618/EC.

For Additional Information

To request additional product information or to arrange for sales assistance, call toll free 1-866-599-4227. Address correspondence to: 3M, Electronics Markets Materials Division, 3M Center, Building 225-3S-06, St. Paul, MN 55144-1000. Our fax number is 651-778-4244 or 1-877-369-2923. In Canada, phone: 1-800-364-3577. In Puerto Rico, phone: 1-787-750-3000. In Mexico, phone: 52-70-04-00.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture at the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Electronics Markets Materials Division

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
1-866-599-4227 phone
651-778-4244 fax
www.3M.com/electronics

3M is a trademark of 3M Company.
Please recycle. Printed in U.S.A.
©3M 2012. All rights reserved.
60-5002-0336-3



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru