

Features

- 40mW max. no load power consumption
- High efficiency up to 76%
- Isolated output 3kVAC / 1 min
- SCP, OVP protection
- Wide operating temperature range: -40°C to +85°C
- Universal input 85-305VAC

Regulated Converter

RECOM AC/DC Converter

RAC03-SER/277

3 Watt Single Output



UL60950-1 certified
 CAN/CSA-22.2 No. 60950 certified
 EN60335-1 certified
 IEC/EN60950-1 certified
 CB Report
 EN55032 certified
 EN55024 certified
 EN55014 certified

Description

The modules of the RAC03-SER/277 series are regulated AC/DC converters with 3kVAC isolation and a round, flat shape. This series has been designed to offer low stand-by consumption and an ultra-wide input voltage range. Uses include a variety of applications in building automation, security systems and communication systems.

Selection Guide

| Part Number | Input Voltage Range [VAC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ ⁽¹⁾ [%] | Max. Capacitive Load ⁽²⁾ [µF] |
|------------------|---------------------------|----------------------|---------------------|-----------------------------------|--|
| RAC03-3.3SER/277 | 100-277 | 3.3 | 900 | 68 | 22000 |
| RAC03-05SER/277 | 100-277 | 5 | 600 | 70 | 7500 |
| RAC03-12SER/277 | 100-277 | 12 | 250 | 74 | 1000 |
| RAC03-24SER/277 | 100-277 | 24 | 125 | 76 | 200 |

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Note2: Max Cap Load is tested at nominal input and full resistive load

Model Numbering



Notes:

Note3: add suffix "-TRAY" for Tray packaging, without suffix standard cardboard box packaging

Ordering Examples:

| | | | | |
|----------------------|--------|--------|---------------|----------------|
| RAC03-05SER/277 | 3 Watt | 5Vout | Single Output | cardboard box |
| RAC03-12SER/277 | 3 Watt | 12Vout | Single Output | cardboard box |
| RAC03-05SER/277-TRAY | 3 Watt | 5Vout | Single Output | tray packaging |

Specifications (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS

| Parameter | Condition | Min. | Typ. | Max. |
|--|--------------------------|------------------|----------------------|------------------|
| Input Voltage Range ⁽⁴⁾ | nom. Vin= 230VAC | 85VAC 120VDC | 277VAC | 305VAC 430VDC |
| Input Current | 115VAC 230VAC | | 70mA 45mA | |
| Inrush Current | cold start at +25°C | 115VAC 230VAC | | 15A 30A |
| No load Power Consumption | 85-305VAC/ 47-440Hz | | | 40mW |
| Input Frequency Range | AC Input | 47Hz | | 440Hz |
| Minimum Load ⁽⁷⁾ | | | 10% | |
| Hold-up Time | 115VAC | 18ms | | |
| Internal Operating Frequency | 100% load at nominal Vin | | 55kHz | |
| Output Ripple and Noise ⁽⁵⁾ | 3.3Vout all others | | 250mVp-p 200mVp-p | |

Notes:

Note4: No line derating required

Note5: Ripple and Noise is the maximum peak-to-peak voltage value measured at the output with a 20MHz bandwidth, at rated line voltage at full load. And with a 47µF low-ESR electrolytic capacitor in parallel with a 0.1µF ceramic capacitor across output

Efficiency vs. Load



REGULATIONS

| Parameter | Condition | Value |
|---|----------------------------------|-------------------------|
| Output Voltage Tolerance ⁽⁶⁾ | 3.3Vout | ±4.0% typ. / ±8.0% max. |
| | 5Vout | ±3.5% typ. / ±5.0% max. |
| | 12, 24Vout | ±3.0% typ. / ±4.0% max. |
| Line Regulation | low line to high line, full load | ±0.7% typ. / ±1.0% max. |
| Load Regulation ⁽⁷⁾ | 3.3Vout | 5.5% typ. / 9.0% max. |
| | 5Vout | 5.0% typ. / 7.5% max. |
| | 12, 24Vout | 4.0% typ. / 5.5% max. |

Notes:

Note6: Includes initial voltage accuracy, thermal drift, line regulation and load regulation at rated input voltage and load conditions

Note7: Operation below 10% load will not harm the converter, but specifications may not be met

Specifications (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

PROTECTIONS

| Parameter | Type | | Value |
|--------------------------------|---------------------|---------------------|--------------------------------|
| Short Circuit Protection (SCP) | | | continuous, automatic recovery |
| Over Voltage Protection (OVP) | zener diode clamp | | 105% - 150% |
| Over Current Limit | | | 120% - 190% |
| Over Voltage Category | | | OVCII |
| Isolation Voltage | I/P to O/P | tested for 1 minute | 3kVAC |
| Isolation Resistance | | | 1GΩ min. |
| Leakage Current | 85-305VAC, 47-440Hz | | 10μA max. |

Notes:

Note8: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse: slow blow type



ENVIRONMENTAL

| Parameter | Condition | | Value |
|--|----------------------------------|-------|------------------------------|
| Operating Temperature Range ⁽⁹⁾ | full load | | -40°C to +75°C |
| | refer to derating graph | | -40°C to +85°C |
| Maximum Case Temperature | | | +105°C |
| Thermal Impedance | | | 9.5K/W typ. |
| Operating Humidity | non-condensing | | 5% - 95% RH max. |
| MTBF | according to MIL-HDBK-217F, G.B. | +25°C | 3554 x 10 ³ hours |
| | | | 3219 x 10 ³ hours |

Notes:

Note9: At low input voltage (85-140VAC) and temperature below -25°C the RAC03-3.3SER/277 and RAC03-05SER/277, will not start

Derating Graph



Specifications (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

SAFETY AND CERTIFICATIONS

| Certificate Type (Safety) | Report / File Number | Standard |
|---|----------------------|--|
| Information Technology Equipment, General Requirements for Safety (CB Scheme) | L0339L26-CB-1-B4 | IEC60950-1:2005 2nd Edition + A2:2013 EN60950-1:2006 + A2:2013 |
| Information Technology Equipment, General Requirements for Safety | E224736-A24-UL | UL No. 60950-1, 2nd Edition, 2014 CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition, 2014 |
| Household and similar electrical appliances, General requirements | L0339L26-B2-L | EN60335-1:2012+A11:2014 |
| EAC Safety of Low Voltage Equipment | RU-AT.37.02367 | TP TC 004/2011 |
| RoHS2+ | | RoHS-2011/65/EU + AM-2015/863 |

EMC Compliance (Industrial)

| Condition | Standard / Criterion |
|--|---|
| Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement | EN55032:2015, Class B |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement | EN55024:2010 |
| ESD Electrostatic discharge immunity test | ±8kV air, ±4kV contact EN61000-4-2:2009, Criteria B |
| Radiated, radio-frequency, electromagnetic field immunity test | 3V/m EN61000-4-3:2006 + A2:2010, Criteria A |
| Fast Transient and Burst Immunity | AC Power Port: ±1kV EN61000-4-4:2012, Criteria A |
| Power Magnetic Field Immunity | 50Hz, 1A/m EN61000-4-8:2010, Criteria A |
| Voltage Dips and Interruption | Voltage Dips: >95% reduction >30% reduction Interruption: >95% EN61000-4-11:2004, Criteria A EN61000-4-11:2004, Criteria A EN61000-4-11:2004, Criteria B |
| Limits of Voltage Fluctuations & Flicker | EN61000-3-3:2013 |

EMC Compliance (Household)

| Condition | Standard / Criterion |
|---|--|
| Electromagnetic compatibility of multimedia equipment – Emission Requirements | EN55014-1:2006+A2:2011 |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement | EN55014-2:2015 |
| ESD Electrostatic discharge immunity test | ±8kV Air, ±4kV Contact IEC61000-4-2:2008, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test | 3V/m IEC61000-4-3:2006 + A2:2010, Criteria A |
| Fast Transient and Burst Immunity | AC Power Port +/-1.0kV DC Output +/-0.5kV IEC61000-4-4:2012, Criteria A |
| Surge Immunity | AC Power Port L-N +/-2kV DC Output L-N +/-1kV IEC61000-4-5:2014, Criteria B |
| Immunity to conducted disturbances, induced by radio-frequency fields | AC Power Port 3V, DC Output 3V IEC61000-4-6:2013, Criteria A |
| Voltage Dips and Interruption | Voltage Dips: >95% reduction >30% reduction Interruption: >95% IEC61000-4-11:2004, Criteria B IEC61000-4-11:2004, Criteria C IEC61000-4-11:2004, Criteria C |
| Limits of Harmonic Current Emissions | EN61000-3-2:2014 |
| Limits of Voltage Fluctuations & Flicker | EN61000-3-3:2013 |



DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|-------------------|-----------------|--|
| Material | case potting | black plastic, (UL94V-0) epoxy, (UL94V-0) |
| Dimension (LxWxH) | | 50.3 x 50.3 x 11.0mm |
| Weight | | 41g typ. |

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

Dimension Drawing (mm)

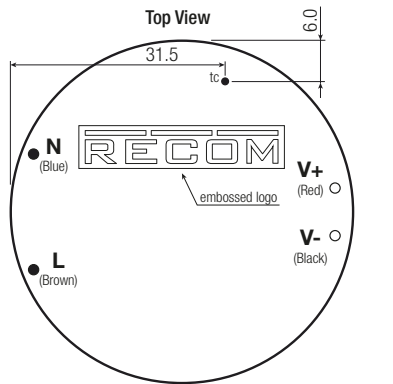




Wired information

| # | Function | Wire color | Type | AWG |
|---|------------|------------|---------|-----|
| 1 | VAC in (L) | brown | UL-1015 | 22 |
| 2 | VAC in (N) | blue | UL-1015 | 22 |
| 3 | +Vout | red | UL-1430 | 22 |
| 4 | -Vout | black | UL-1430 | 22 |

tc= case temperature measuring point

Tolerance: xx.x= ±0.5mm

xx.xx= ±0.35mm

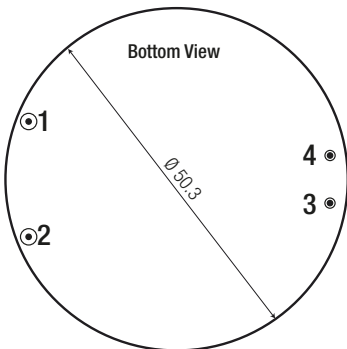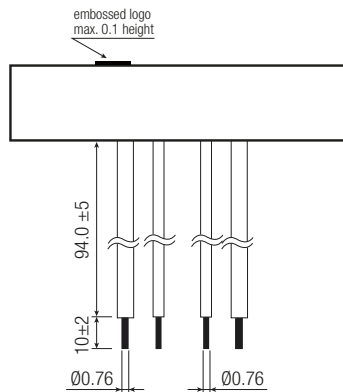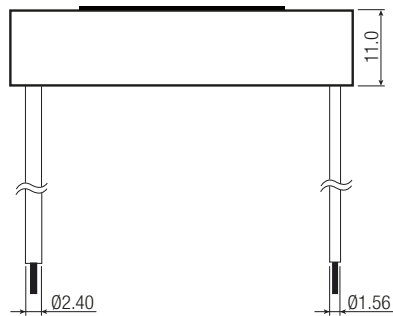

PACKAGING INFORMATION

| Parameter | Type | Value |
|-----------------------------|---------------|-------------------------|
| Packaging Dimension (LxWxH) | cardboard box | 195.0 x 170.0 x 140.0mm |
| | tray | 462.0 x 292.0 x 49.0mm |
| Packaging Quantity | cardboard box | 12pcs |
| | tray | 72pcs |
| Storage Temperature Range | | -40°C to +85°C |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru