



**DETAIL A**  
KEY SLOTS #2 & #4 SHOWN  
SCALE 2:1



|               |                                       |        |              |                 |  |                       |            |               |                        |          |     |
|---------------|---------------------------------------|--------|--------------|-----------------|--|-----------------------|------------|---------------|------------------------|----------|-----|
| spec ref      | ---                                   | dr     | Stu Stoner   | 2008/02/05      | projection   | MM                    | size       | A3            | scale                  | 1:1      |     |
| tolerance std | ---                                   | eng    | Tom Feng     | 2014/09/24      |  |                       | ecn no     | ELX-N-18883-1 | rel level              | Released |     |
| ---           | TOLERANCES UNLESS OTHERWISE SPECIFIED | chr    | -            | ---             |  |                       |            |               |                        |          | --- |
| surface       | ✓                                     | appr   | Delhy Liu    | 2014/09/24      | product family   | MiniSAS/SATA          | dwg no     |               | 10084749               | rev      |     |
| ---           | linear                                | 0.X    | ±0.3         |                 | title FINAL CABLE ASSEMBLY-ALTERNATE CABLE<br>Mini SAS 2.0/SATA (CRKT) |                       | cat. no. - |               | Product - Customer Drw |          |     |
| ---           | 0.XX                                  | ±0.10  | sheet 1 of 6 |                 |  |                       |            |               |                        |          |     |
| ---           | 0.XXX                                 | ±0.050 | PDS: Rev :H  |                 |  |                       |            |               |                        |          |     |
| ---           | angular                               | 0°     | ±2°          | STATUS:Released |  | Printed: Sep 24, 2014 |            |               |                        |          |     |

Copyright FCI.



KEY SLOT 2, 4 & 6  
 ○ ◇ UNIVERSIAL PORT



KEY SLOT 2 & 4  
 ◇ OUT PORT



KEY SLOT 4 & 6  
 ○ IN PORT

### MINI SAS 2.0

| PRODUCT NUMBER<br>SEE NOTE 4 | HUAWEI<br>PART NUMBER | DESCRIPTION           | GAUGE  | "DIM L"<br>LENGTH | END P1<br>KEY SLOT | END P2<br>KEY SLOT | IDENTIFIER   |
|------------------------------|-----------------------|-----------------------|--------|-------------------|--------------------|--------------------|--|
| I0084749-M060002LF           | /                     | X4 SAS CABLE ASSEMBLY | 24 AWG | 6M                | 4, 6               | 4, 6               | SUBTRACTIVE ROUTING (IN PORT), SAS                                 |
| I0084749-N040002LF           | /                     | X4 SAS CABLE ASSEMBLY | 26 AWG | 4M                | 4, 6               | 4, 6               |  |
| I0084749-N050002LF           | /                     | X4 SAS CABLE ASSEMBLY | 26 AWG | 5M                | 4, 6               | 4, 6               |  |
| I0084749-P010002LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 1M                | 4, 6               | 4, 6               |  |
| I0084749-P020002LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 2M                | 4, 6               | 4, 6               |  |
| I0084749-P030002LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 3M                | 4, 6               | 4, 6               |  |
| I0084749-M060003LF           | /                     | X4 SAS CABLE ASSEMBLY | 24 AWG | 6M                | 2, 4, 6            | 2, 4, 6            | UNIVERSAL KEY, SAS   |
| I0084749-N030003LF           | /                     | X4 SAS CABLE ASSEMBLY | 26 AWG | 3M                | 2, 4, 6            | 2, 4, 6            |  |
| I0084749-N040003LF           | /                     | X4 SAS CABLE ASSEMBLY | 26 AWG | 4M                | 2, 4, 6            | 2, 4, 6            |  |
| I0084749-N050003LF           | /                     | X4 SAS CABLE ASSEMBLY | 26 AWG | 5M                | 2, 4, 6            | 2, 4, 6            |  |
| I0084749-P002503LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 0.25M             | 2, 4, 6            | 2, 4, 6            |  |
| I0084749-P010003LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 1M                | 2, 4, 6            | 2, 4, 6            |  |
| I0084749-P015003LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 1.5M              | 2, 4, 6            | 2, 4, 6            |  |
| I0084749-P020003LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 2M                | 2, 4, 6            | 2, 4, 6            |  |
| I0084749-P025003LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 2.5M              | 2, 4, 6            | 2, 4, 6            |  |
| I0084749-P030003LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 3M                | 2, 4, 6            | 2, 4, 6            |  |
| I0084749-M060006LF           | /                     | X4 SAS CABLE ASSEMBLY | 24 AWG | 6M                | 2, 4               | 4, 6               | SAS, TABLE ROUTING (OUT PORT),<br>TO SUBTRACTIVE ROUTING (IN PORT) |
| I0084749-N010006LF           | /                     | X4 SAS CABLE ASSEMBLY | 26 AWG | 1M                | 2, 4               | 4, 6               |  |
| I0084749-N030006LF           | /                     | X4 SAS CABLE ASSEMBLY | 26 AWG | 3M                | 2, 4               | 4, 6               |  |
| I0084749-N040006LF           | /                     | X4 SAS CABLE ASSEMBLY | 26 AWG | 4M                | 2, 4               | 4, 6               |  |
| I0084749-N050006LF           | /                     | X4 SAS CABLE ASSEMBLY | 26 AWG | 5M                | 2, 4               | 4, 6               |  |
| I0084749-P010006LF           | 0405G005              | X4 SAS CABLE ASSEMBLY | 28 AWG | 1M                | 2, 4               | 4, 6               |  |
| I0084749-P020006LF           | /                     | X4 SAS CABLE ASSEMBLY | 28 AWG | 2M                | 2, 4               | 4, 6               |  |
| I0084749-P030006LF           | 0405G003              | X4 SAS CABLE ASSEMBLY | 28 AWG | 3M                | 2, 4               | 4, 6               |  |

### MINI SAS 2.0 KEYING OPTIONS

|               |                                       |             |            |                          |                                      |                 |          |                       |           |                        |              |
|---------------|---------------------------------------|-------------|------------|--------------------------|--------------------------------------|-----------------|----------|-----------------------|-----------|------------------------|--------------|
| spec ref      | ---                                   | dr          | Stu Stoner | 2008/02/05               | projection                           | MM              | size     | A3                    | scale     | 1:1                    |              |
| tolerance std | ---                                   | eng         | Tom Feng   | 2014/09/24               |                                      |                 | ecn no   | ELX-N-18883-1         | rel level | Released               |              |
| ---           | TOLERANCES UNLESS OTHERWISE SPECIFIED | chr         | -          | -                        |                                      |                 |          |                       |           |                        |              |
| surface       | ✓                                     | appr        | Delhy Liu  | 2014/09/24               | product family                       | MiniSAS/SATA    | dwg no   |                       | 10084749  | rev                    | H            |
| linear        | 0.X ±0.3                              |             |            | title                    | FINAL CABLE ASSEMBLY-ALTERNATE CABLE |                 | cat. no. |                       | -         | Product - Customer Drw | sheet 2 of 6 |
| linear        | 0.XX ±0.10                            | www.fci.com |            | Mini SAS 2.0/SATA (CRKT) |                                      | STATUS:Released |          | Printed: Sep 24, 2014 |           |                        |              |
| linear        | 0.XXX ±0.050                          |             |            |                          |                                      |                 |          |                       |           |                        |              |
| angular       | 0° ±2°                                |             |            |                          |                                      |                 |          |                       |           |                        |              |

# SATA

| PRODUCT NUMBER<br>SEE NOTE 4 | DESCRIPTION            | GAUGE  | "DIM L"<br>LENGTH | END P1<br>KEY SLOT | END P2<br>KEY SLOT | IDENTIFIER    |
|------------------------------|------------------------|--------|-------------------|--------------------|--------------------|---------------|
| 10084749-M060004LF           | X4 SATA CABLE ASSEMBLY | 24 AWG | 6M                | 1,4                | 1,4                | X CABLE, SATA |
| 10084749-N020004LF           | X4 SATA CABLE ASSEMBLY | 26 AWG | 2M                | 1,4                | 1,4                |               |
| 10084749-N040004LF           | X4 SATA CABLE ASSEMBLY | 26 AWG | 4M                | 1,4                | 1,4                |               |
| 10084749-N050004LF           | X4 SATA CABLE ASSEMBLY | 26 AWG | 5M                | 1,4                | 1,4                |               |
| 10084749-P010004LF           | X4 SATA CABLE ASSEMBLY | 28 AWG | 1M                | 1,4                | 1,4                |               |
| 10084749-P030004LF           | X4 SATA CABLE ASSEMBLY | 28 AWG | 3M                | 1,4                | 1,4                |               |
| 10084749-M060005LF           | X4 SATA CABLE ASSEMBLY | 24 AWG | 6M                | 7                  | 7                  | M CABLE, SATA |
| 10084749-N020005LF           | X4 SATA CABLE ASSEMBLY | 26 AWG | 2M                | 7                  | 7                  |               |
| 10084749-N040005LF           | X4 SATA CABLE ASSEMBLY | 26 AWG | 4M                | 7                  | 7                  |               |
| 10084749-N050005LF           | X4 SATA CABLE ASSEMBLY | 26 AWG | 5M                | 7                  | 7                  |               |
| 10084749-P010005LF           | X4 SATA CABLE ASSEMBLY | 28 AWG | 1M                | 7                  | 7                  |               |
| 10084749-P030005LF           | X4 SATA CABLE ASSEMBLY | 28 AWG | 3M                | 7                  | 7                  |               |



**BEND RADIUS  
(24 AWG SHOWN)**

| CABLE  | DIM "A" | DIM "B"   |
|--------|---------|-----------|
| 24 AWG | (R46.9) | (Ø 9.5mm) |
| 26 AWG | (R41.7) | (Ø 8.3mm) |
| 28 AWG | (R37.7) | (Ø 7.6mm) |



KEY SLOT 1 & 4  
X CABLE, SATA



KEY SLOT 7  
M CABLE, SATA

## SATA KEYING OPTIONS

|               |                                       |             |            |            |                                      |              |                        |               |           |          |
|---------------|---------------------------------------|-------------|------------|------------|--------------------------------------|--------------|------------------------|---------------|-----------|----------|
| spec ref      | ---                                   | dr          | Stu Stoner | 2008/02/05 | projection                           | MM           | size                   | A3            | scale     | 1:1      |
| tolerance std | ---                                   | eng         | Tom Feng   | 2014/09/24 |                                      |              | ecn no                 | ELX-N-18883-1 | rel level | Released |
| ---           | TOLERANCES UNLESS OTHERWISE SPECIFIED | chr         | -          | -          |                                      |              |                        |               |           |          |
| surface       | ✓                                     | appr        | Delhly Liu | 2014/09/24 | product family                       | MiniSAS/SATA | rel level              | Released      | rev       | H        |
| linear        | 0.X ±0.3                              |             |            | title      | FINAL CABLE ASSEMBLY-ALTERNATE CABLE |              | dwg no                 | 10084749      |           |          |
|               | 0.XX ±0.10                            | www.fci.com |            | cat. no.   | -                                    |              | Product - Customer Drw | sheet 3 of 6  |           |          |
|               | 0.XXX ±0.050                          |             |            |            |                                      |              |                        |               |           |          |
| angular       | 0° ±2°                                |             |            |            |                                      |              |                        |               |           |          |



A

B

C

D

A

B

C

D

WIRING LIST SEE NOTE 7



|    |       |     |   |     |       |
|----|-------|-----|---|-----|-------|
|    | GND   | A1  | — | B1  | GND   |
|    | Rx 0+ | A2  | ← | B2  | Tx 0+ |
|    | Rx 0- | A3  | ← | B3  | Tx 0- |
|    | GND   | A4  | — | B4  | GND   |
|    | Rx 1+ | A5  | ← | B5  | Tx 1+ |
|    | Rx 1- | A6  | ← | B6  | Tx 1- |
|    | GND   | A7  | — | B7  | GND   |
|    | Rx 2+ | A8  | ← | B8  | Tx 2+ |
|    | Rx 2- | A9  | ← | B9  | Tx 2- |
|    | GND   | A10 | — | B10 | GND   |
|    | Rx 3+ | A11 | ← | B11 | Tx 3+ |
|    | Rx 3- | A12 | ← | B12 | Tx 3- |
|    | GND   | A13 | — | B13 | GND   |
| P1 | GND   | B1  | — | A1  | GND   |
|    | Tx 0+ | B2  | → | A2  | Rx 0+ |
|    | Tx 0- | B3  | → | A3  | Rx 0- |
|    | GND   | B4  | — | A4  | GND   |
|    | Tx 1+ | B5  | → | A5  | Rx 1+ |
|    | Tx 1- | B6  | → | A6  | Rx 1- |
|    | GND   | B7  | — | A7  | GND   |
|    | Tx 2+ | B8  | → | A8  | Rx 2+ |
|    | Tx 2- | B9  | → | A9  | Rx 2- |
|    | GND   | B10 | — | A10 | GND   |
|    | Tx 3+ | B11 | → | A11 | Rx 3+ |
|    | Tx 3- | B12 | → | A12 | Rx 3- |
|    | GND   | B13 | — | A13 | GND   |
|    |       |     |   |     | P2    |



Copyright FCI.


|               |                                       |             |            |  |                        |                 |              |               |           |          |
|---------------|---------------------------------------|-------------|------------|--|------------------------|-----------------|--------------|---------------|-----------|----------|
| spec ref      | ---                                   | dr          | Stu Stoner | 2008/02/05   | projection             | MM              | size         | A3            | scale     | 1:1      |
| tolerance std | ---                                   | eng         | Tom Feng   | 2014/09/24   |                        |                 | ecn no       | ELX-N-18883-1 | rel level | Released |
| ---           | TOLERANCES UNLESS OTHERWISE SPECIFIED | chr         | -          | -  |                        |                 |              |               |           |          |
| surface       | ✓                                     | appr        | Delhy Liu  | 2014/09/24   | product family         | MiniSAS/SATA    |              |               |           |          |
| linear        | 0.X ±0.3                              |             |            | title FINAL CABLE ASSEMBLY-ALTERNATE CABLE<br>Mini SAS 2.0/SATA (CRKT) |                        | dwg no 10084749 |              | rev H         |           |          |
|               | 0.XX ±0.10                            |             |            |  |                        |                 |              |               |           |          |
|               | 0.XXX ±0.050                          |             |            |  |                        |                 |              |               |           |          |
| angular       | 0° ±2°                                | www.fci.com | cat. no.   | -  | Product - Customer Drw |                 | sheet 4 of 6 |               |           |          |

NOTES:

- ① - MATERIAL:  
 BACK SHELLS: ZINC DIECAST  
 PULL TAB: MOLDED THERMOPLASTIC  
 LATCH: STAINLESS STEEL  
 JET MELT: POLYAMIDE POLYMER
- 2 - ELECTRICAL PERFORMANCE PER CURRENT REVISION  
 OF SERIAL ATA, T10/I760-D (SAS-2 REQUIREMENTS).
- ③ - THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN  
 ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2002/95/EC)

4 - PART NUMBER DESCRIPTION

10084749 - X XX XX XX LF

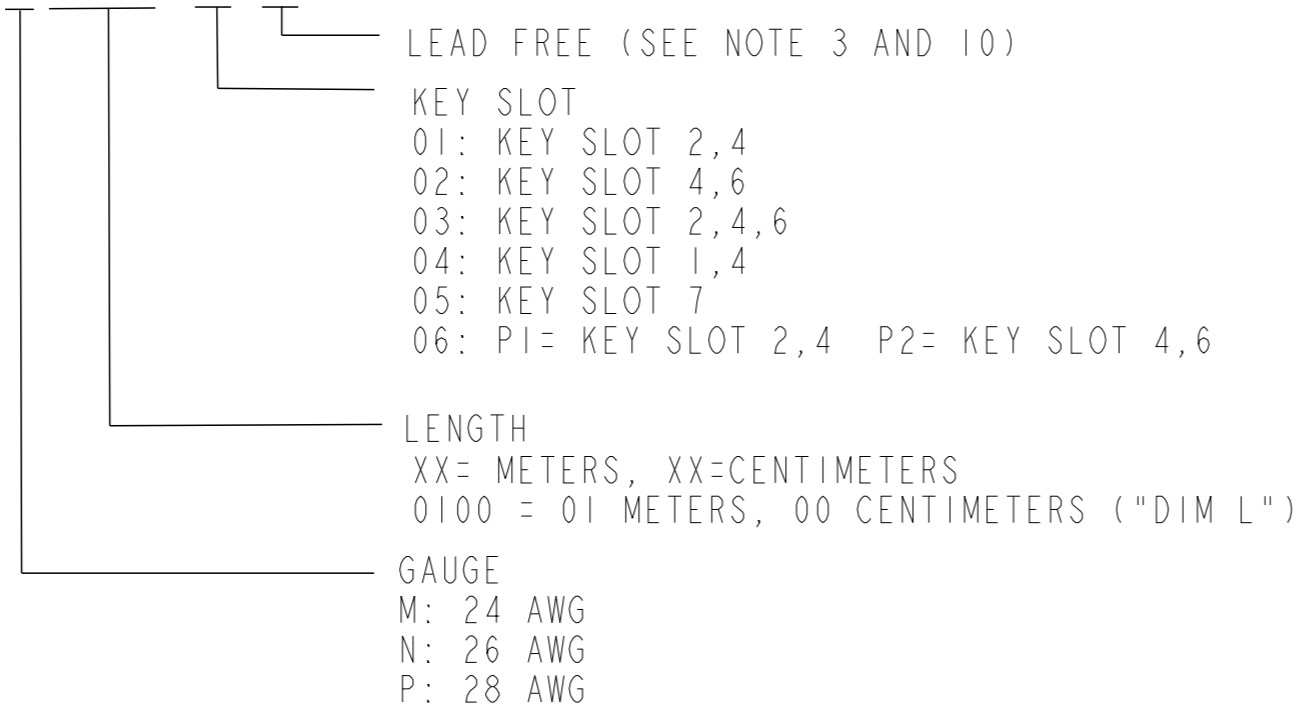

- ⑤ - UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE IS TO BE:  
 < 1 METER = ±25.0mm  
 > 1 METER TO 6 METERS = ± 2% OF "DIM L"

|               |                                       |         |            |            |                |              |                                      |                        |              |          |
|---------------|---------------------------------------|---------|------------|------------|----------------|--------------|--------------------------------------|------------------------|--------------|----------|
| spec ref      | ---                                   | dr      | Stu Stoner | 2008/02/05 | projection     | MM           | size                                 | A3                     | scale        | 1:1      |
| tolerance std | ---                                   | eng     | Tom Feng   | 2014/09/24 |                | ← →          | ecn no                               | ELX-N-18883-1          | rel level    | Released |
| ---           | TOLERANCES UNLESS OTHERWISE SPECIFIED | chr     | -          | -          |                |              |                                      |                        |              |          |
| ---           |                                       | appr    | Delhy Liu  | 2014/09/24 | product family | MiniSAS/SATA |                                      |                        |              |          |
| surface       | ✓                                     | linear  | 0.X        | ±0.3       |                | title        | FINAL CABLE ASSEMBLY-ALTERNATE CABLE | dwg no                 | 10084749     | rev      |
|               |                                       |         | 0.XX       | ±0.10      |                |              |                                      |                        |              |          |
|               |                                       |         | 0.XXX      | ±0.050     |                |              |                                      |                        |              |          |
| ---           |                                       | angular | 0°         | ±2°        | www.fci.com    | cat. no.     | -                                    | Product - Customer Drw | sheet 5 of 6 | H        |



Copyright FCI.

NOTES CONTINUED:

- ⑥ - UNLESS OTHERWISE SPECIFIED LABEL POSITION IS TO BE 100mm FROM REAR OF CONNECTOR.  
LABEL DETAILS:



FONT SHALL BE CLEARLY VISIBLE AND BLACK IN COLOR.

- ⑦ - ALL CABLE ASSEMBLIES SHALL BE 100% TESTED FOR CONTINUITY AS DEFINED IN WIRING LIST.
- ⑧ - UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE 100% HI-POT TESTED BY APPLYING 300V DC FOR A MINIMUM OF 10ms, UNLESS ACTIVE COMPONENTS ARE USED IN THIS ASSEMBLY.
- 9 - OTHER TESTING PERFORMED AS REQUIRED BY PRODUCT SPECIFICATION: GS-12-548.
- 10 - PACKAGING OF LEAD FREE PRODUCTS MEETS LABELING AND PACKAGING PER SPECIFICATION GS-14-920. PACKAGE CABLE ASSEMBLIES PER GS-14-1272. ADD DUST COVER ON MINI-SAS CONNECTOR WHEN PACKAGE FOR SHIPMENT NEED STICK BELOW LABEL ON PE BAG.



11. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.

12. A "△" SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION. THE CURRENT REVISION WILL BE SHOWN IN THE SYMBOL.

|               |                                       |  |            |             |            |    |   |              |                    |          |
|---------------|---------------------------------------|--|------------|-------------|------------|----|---|--------------|--------------------|----------|
| spec ref      | ---                                   | dr                                     | Stu Stoner | 2008/02/05  | projection | MM | size  | A3           | scale              | 1:1      |
| tolerance std | ---                                   | eng                                    | Tom Feng   | 2014/09/24  |            |    | ecn no  |              | ELX-N-18883-1      |          |
| ---           | TOLERANCES UNLESS OTHERWISE SPECIFIED | chr                                    | -          | -           |            |    | product family  | MiniSAS/SATA | rel level          |          |
| surface       | ✓                                     | appr                                   | Delhy Liu  | 2014/09/24  |            |    | title<br>FINAL CABLE ASSEMBLY-ALTERNATE CABLE<br>Mini SAS 2.0/SATA (CRKT) |              | dwg no<br>10084749 | rev<br>H |
| ---           | linear                                | 0.X ±0.3<br>0.XX ±0.10<br>0.XXX ±0.050 |            | www.fci.com | cat. no.   | -  | Product - Customer Drw  |              | sheet 6 of 6       |          |
| ---           | angular                               | 0° ±2°                                 |            |             |            |    |   |              |                    |          |



Copyright FCI.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)