


# SMPS Molded Radial MLC Capacitors



## SXP Style for High Temperature Applications up to 200°C

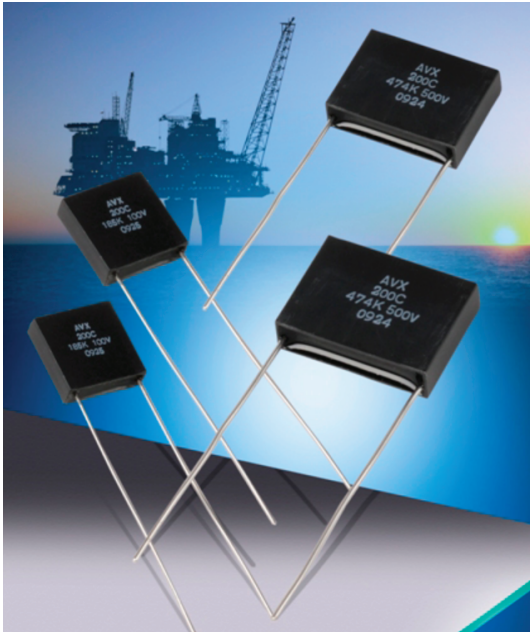

SXP-style, encapsulated radial leaded MLC capacitors are ideally suited for high temperature applications up to 200°C. This product is intended for downhole oil exploration, including logging while drilling, geophysical probes, as well as space, aerospace and hybrid automotive applications. This product supplements the SMX family of capacitors and offers mechanical protection to the ceramic element in extreme harsh environment. The high temperature solder utilized in the construction of SXP-style parts assures reliable operation in high temperature and rugged environments. The SXP-style capacitors are ideally suited for applications as DC filters in high power, high frequency motor drives, high pulsed-current circuitry, as well as standard electronic equipment designed for high temperature applications.

SXP-style, switch mode power supply capacitors are characterized with excellent performance. The main benefits of SXP product include:

- Low ESR, low ESL
- Low DC leakage
- Excellent high frequency performance

**Not RoHS Compliant**

### HOW TO ORDER

<b>SXP</b>	<b>3</b>	<b>1</b>	<b>C</b>	<b>104</b>	<b>M</b>	<b>A</b>	<b>A</b>
<b>AVX Style</b>	<b>Size</b> See Dimensions chart	<b>Voltage Code</b> 50V = 5 100V = 1 200V = 2 500V = 7 1000V = A 1500V = S 2000V = G 3000V = H	<b>Temperature Coefficient</b> COG = A VHT = C	<b>Capacitance Code</b> (2 significant digits + number of zeros) 100 pF = 101 22,000 pF = 223 1µF = 105	<b>Capacitance Tolerance</b> COG: J = ±5% K = ±10% M = ±20% X7R: J = ±5% K = ±10% M = ±20% Z = +80%, -20%	<b>Test Level</b> A = Standard	<b>Leads</b> A = Standard Sn/Pb (min. 5% Pb)
					<b>Tighter tolerances available upon request</b>		

### ELECTRICAL SPECIFICATIONS

#### Temperature Coefficient

COG: A Temperature Coefficient 0 ±30 ppm/°C, -55° to +200°C  
 VHT: C Temperature Coefficient ±15%, -55°C to +125°C  
 +15% - 56%, -55°C to +200°C

**Capacitance Test** (MIL-STD-202 Method 305)  
 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

#### Dissipation Factor 25°C

COG: 0.15% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz  
 X7R/X9U: 2.5% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

#### Insulation Resistance 25°C

(MIL-STD-202 Method 302)  
 100K MΩ or 1000 MΩ-µF, whichever is less.

#### Insulation Resistance 125°C

(MIL-STD-202 Method 302)  
 10K MΩ or 100 MΩ-µF, whichever is less.

#### Insulation Resistance 200°C

(MIL-STD-202 Method 302)  
 1k MΩ or 10 MΩ -µF, whichever is less.

#### Dielectric Withstanding Voltage 25°C

(Flash Test)  
 250% rated voltage for 5 seconds with 50 mA max  
 charging current. (150% for 500 VDC and 120% for 1000 VDC  
 and higher voltage ratings)




# SMPS Molded Radial MLC Capacitors



SXP Style for High Temperature Applications up to 200°C

## STYLE

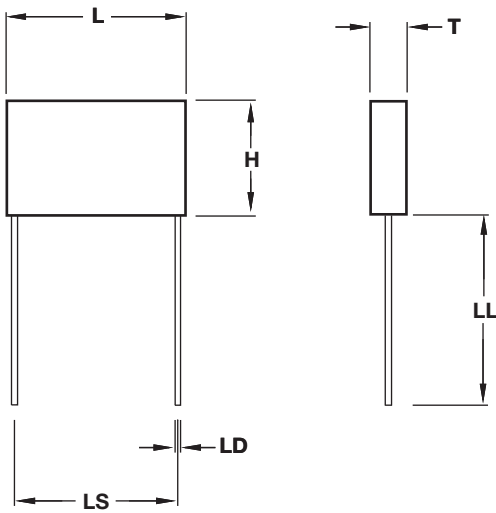

## DIMENSIONS

millimeters (inches)

AVX Style	Length (L) ±0.25 (±0.010)	Height (H) ±0.25 (±0.010)	Thickness (T) ±0.25 (±0.010)	Lead Spacing ±0.76 (±0.030)	LD ±0.05 (±0.002)
SXP1	8.9 (0.350)	8.9 (0.350)	5.08 (0.200)	5.08 (0.200)	0.51 (0.020)
SXP2	11.4 (0.450)	11.4 (0.450)	5.08 (0.200)	5.08 (0.200)	0.51 (0.020)
SXP3	12.7 (0.500)	12.7 (0.500)	5.08 (0.200)	10.2 (0.400)	0.64 (0.025)
SXP4	22.4 (0.880)	16.3 (0.640)	5.84 (0.230)	19.8 (0.780)	0.81 (0.032)

## CAPACITANCE RANGE

### COG

Style	50V	100V	200V	500V	1000V	1500V	2000V	3000V
SXP1 (MIN)	1000pF	1000pF	1000pF	100pF	100pF	100pF	100pF	100pF
SXP1 (MAX)	.047μF	.027μF	8200pF	4700pF	2200pF	1000pF	560pF	270pF
SXP2 (MIN)	.01μF	1000pF	1000pF	100pF	100pF	100pF	100pF	100pF
SXP2 (MAX)	.10μF	.056μF	.018μF	8200pF	4700pF	1800pF	1200pF	560pF
SXP3 (MIN)	.01μF	1000pF	1000pF	1000pF	1000pF	100pF	100pF	100pF
SXP3 (MAX)	.15μF	.068μF	.022μF	.012μF	6800pF	2700pF	1500pF	1000pF
SXP4 (MIN)	.01μF	.01μF	1000pF	1000pF	1000pF	1000pF	100pF	100pF
SXP4 (MAX)	.39μF	.22μF	.068μF	.033μF	.018μF	8200pF	4700pF	2700pF

### VHT

Style	50V	100V	200V	500V	1000V	1500V	2000V	3000V
SXP1 (MIN)	.1μF	.01μF	.01μF	.01μF	.01μF	.01μF	1000pF	1000pF
SXP1 (MAX)	1.5μF	1.0μF	.33μF	.12μF	.056μF	.022μF	.012μF	4700pF
SXP2 (MIN)	.1μF	.1μF	.01μF	.01μF	.01μF	.01μF	.01μF	1000pF
SXP2 (MAX)	2.7μF	1.8μF	.68μF	.27μF	.10μF	.056μF	.022μF	8200pF
SXP3 (MIN)	.01μF	.1μF	.01μF	.01μF	.01μF	.01μF	.01μF	.01μF
SXP3 (MAX)	3.9μF	2.7μF	1.0μF	.33μF	.15μF	.082μF	.033μF	.015μF
SXP4 (MIN)	1μF	.1μF	.1μF	.01μF	.01μF	.01μF	.01μF	.01μF
SXP4 (MAX)	12μF	8.2μF	2.7μF	1.0μF	.47μF	.22μF	.10μF	.039μF

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)