
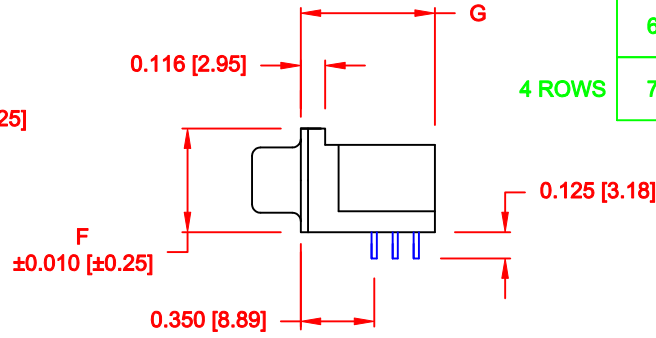


44 PIN SHOWN

DIMENSIONS (IN.)							
No. OF PINS	A	B	C	D	E	F	G
15	1.213	0.984	0.644	0.090	0.311	0.496	0.639
	30.80	24.99	16.34	2.29	7.90	12.60	16.23
26	1.543	1.312	0.966	0.090	0.311	0.496	0.639
	39.19	33.32	24.53	2.29	7.90	12.60	16.23
44	2.087	1.852	1.512	0.090	0.311	0.496	0.639
	53.00	47.04	38.40	2.29	7.90	12.60	16.23
62	2.732	2.500	2.156	0.095	0.311	0.496	0.639
	69.30	63.50	54.76	2.41	7.90	12.60	16.23
78	2.644	2.406	2.063	0.095	0.422	0.555	0.721
	67.16	61.11	52.40	2.41	10.72	14.10	18.30

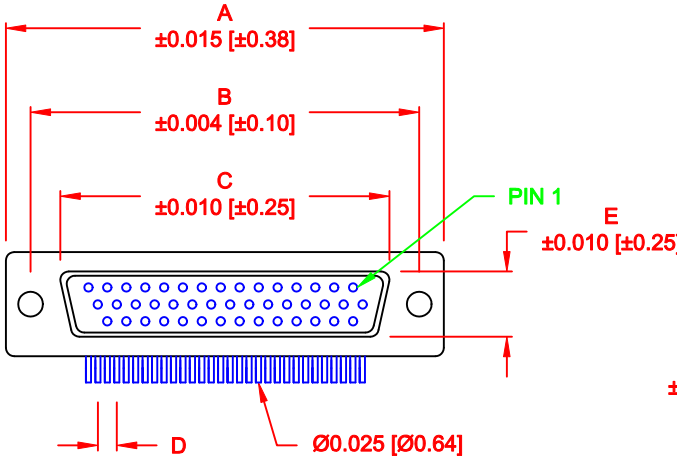

181-YYY-2 1 3 R YY 1

SERIES _____
POSITIONS _____
015 _____
026 _____
044 _____
062 _____
078 _____
GENDER _____
2 = FEMALE _____
TERMINATION _____
1 = DIP SOLDER _____
SHELL PLATING _____
3 = NICKEL PLATED _____
RoHS COMPLIANT _____
(HIGH TEMP. PROCESS) _____
HARDWARE OPTIONS _____
16 = $\varnothing$ 0.120 HOLE / INSIDE GND STRAPS _____
17 = 4-40 INSERTS / INSIDE GND STRAPS _____
18 = 4-40 SCREWLOCKS / INSIDE GND STRAPS _____
43 = $\varnothing$ 0.120 HOLE / METAL SHELL _____
45 = 4-40 INSERTS / METAL SHELL _____
48 = 4-40 SCREWLOCKS / METAL SHELL _____
53 = 4-40 INSERTS / BOARDLOCKS _____
55 = $\varnothing$ 0.120 HOLE / BOARDLOCKS _____
56 = 4-40 SCREWLOCKS / BOARDLOCKS _____
PLATING OPTIONS _____
1 = GOLD FLASH _____

ELECTRICAL:

CURRENT RATING: 2 AMPS
CONTACT RESISTANCE: 15 MILLIOhms Max.
INSULATION RESISTANCE: 1,000 MEGOhms Min.
VOLTAGE: 500V FOR 1 MINUTE
TEMPERATURE: -50°C TO +100°C


MATERIALS:

SHELL: SPCC, NICKEL PLATED
INSULATOR: PA9T-BLACK (UL94-0)
260°C PROCESS TEMPERATURE
CONTACT: BRASS, GOLD ENTIRE CONTACT
RIVET: COPPER ALLOY, NICKEL PLATED
BOARDLOCK: SPCC, TIN PLATED
SCREWLOCK: ZINC ALLOY, NICKEL PLATED


DO NOT SCALE FROM DRAWING

RoHS COMPLIANT


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS		DATE: 3-15-05					
			CHECKED:		DATE:					
			SCALE:		SHEET 1 OF 3					
NorComp			DWG NO. 181-YYY-213RYY1							
			REV 11							

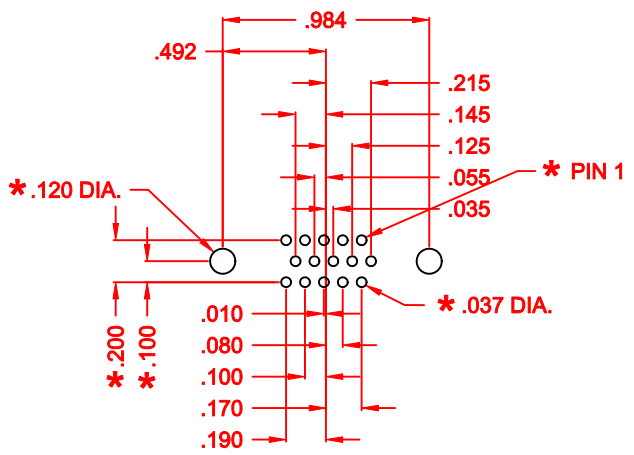


15 POSITION

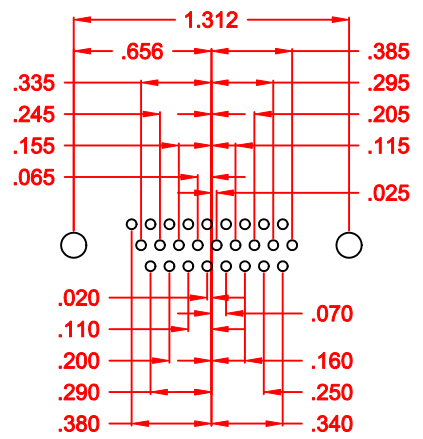


26 POSITION

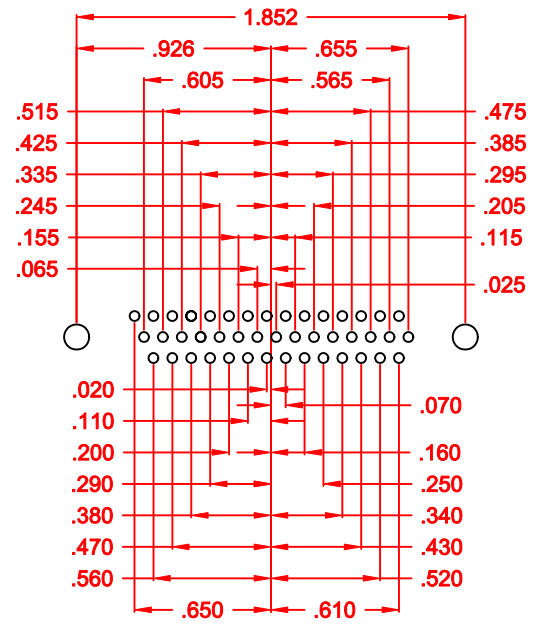

44 POSITION

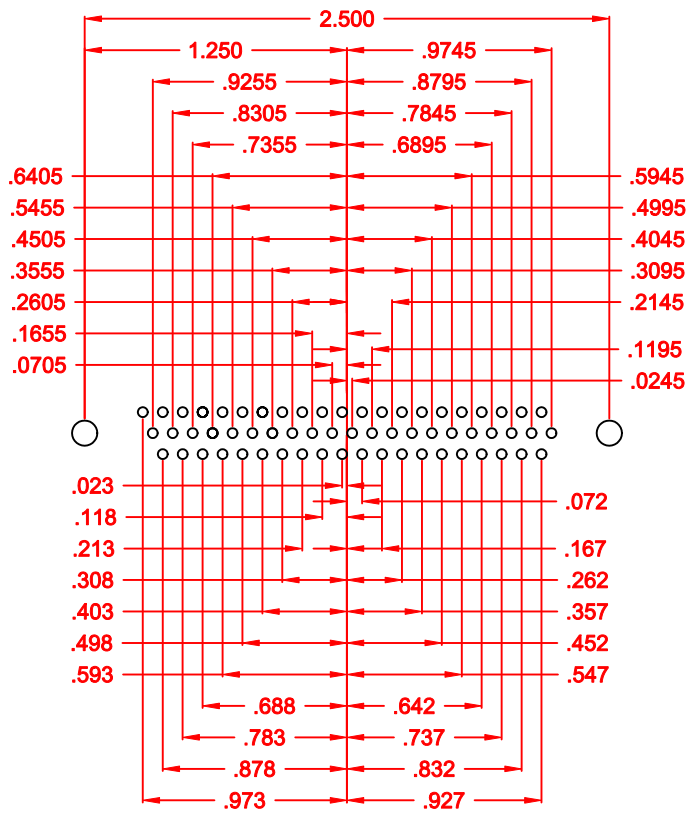

62 POSITION

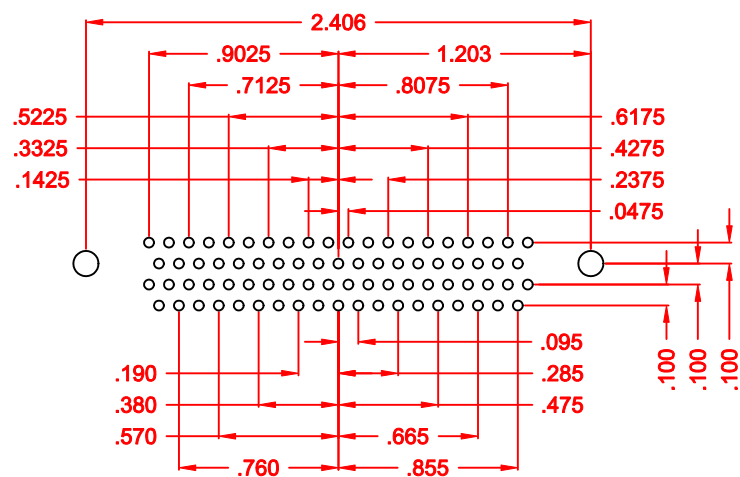

78 POSITION







181 SERIES
HIGH DENSITY
RIGHT ANGLE

HOLE PATTERN SHOWN
ARE FOR FEMALE

* TYP. ON ALL SIZES

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH		DATE: 03-09-06		
			CHECKED:		DATE:		
NorComp			SCALE: FULL		SHEET 2 OF 3		REV 11
			DWG NO. 181-YYY-213RYY1				

	 METAL SHELL WITH INSIDE GROUND STRAPS	 METAL SHELL	 METAL SHELL FORK BOARD LOCKS
 .120" DIA. HOLE	16	43	55
 4-40 FLUSH INSERT	17	45	53 BOARD LOCKS
 4-40 HEX STANDOFF FEMALE SCREWLOCK	18	48	56 BOARD LOCKS

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: WAYNE ROBBINS		DATE: 3-17-05	
		CHECKED:		DATE:	
	SCALE:		SHEET 3 OF 3		REV 11
	DWG NO. 181-YYY-213RYY1				

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru