



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	11MAY2019	CJV	JW

- 1 HOUSING AND CONTACT OVERMOLDS - LCP, UL94-V0. BLACK.
CONTACTS AND HOLD DOWNS - COPPER ALLOY.
PICK AND PLACE TAPE - POLYIMIDE FILM.
- 2 CONTACTS - GOLD PLATE ON MATING SURFACES,
TIN PLATE ON SOLDER FEET.
HOLD DOWNS - TIN PLATE.
- 3 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
4. MINIMUM HOST PCB THICKNESS: 1.5.
- 5 SEE MSA SPECIFICATION FOR ADDITIONAL PADDLE CARD LAYOUTS COMPATIBLE WITH THIS RECEPTACLE AND FOR OPTIONAL SPLIT CONTACT PAD LAYOUTS FOR THE PADDLE CARD. SPECIFICATION PINOUT MAY ALSO DESIGNATE PAD SEQUENCE DIFFERENT FROM ILLUSTRATION.
- 6 POSITIONS DESIGNATED AS "SIGNAL" ARE REQUIRED LOCATIONS FOR HIGH SPEED DIFFERENTIAL PAIR SIGNALING. THESE LOCATIONS MAY ALSO BE USED FOR SUPPORTING SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES. POSITIONS DESIGNATED AS "GROUND" ARE REQUIRED WHEN SUPPORTING HIGH SPEED DIFFERENTIAL SIGNALS. THESE LOCATIONS MAY ALSO BE USED FOR SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES.
- 7 COMPONENT AND TRACE KEEP OUT AREA. EACH EDGE 0.15 MIN FROM EDGE OF HOLE.
- 8 TAPE AND REEL PACKAGED FOR PICK AND PLACE SMT PROCESSING, SEE FIGURE 1. POCKET TAPE WIDTH = 72.

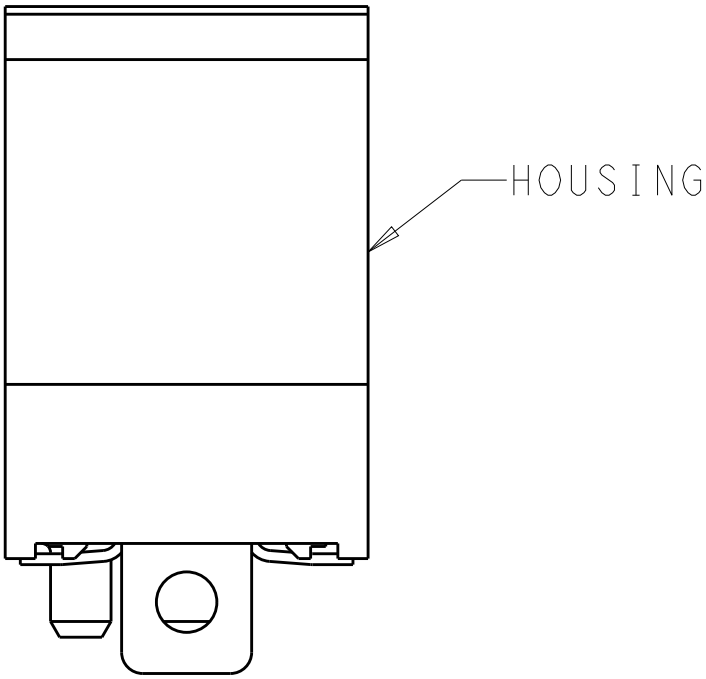


SEE SHEET 4
FOR PART TABLE



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK D. HARMON APVD D. HARMON	16JAN2018 16JAN2018 16JAN2018	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±" 1 PLC ±" 2 PLC ±" 3 PLC ±" 4 PLC ±" ANGLES ±" FINISH		NAME RECEPTACLE ASSEMBLY, VERTICAL, 140 POSITION, SLIVER 2.0	
		PRODUCT SPEC 108-130021 APPLICATION SPEC 114-130008		SIZE A100779	
MATERIAL		WEIGHT		CAGE CODE 2327677	
		CUSTOMER DRAWING		RESTRICTED TO -	
		SCALE 8:1		SHEET 1 OF 4	
				REV A	

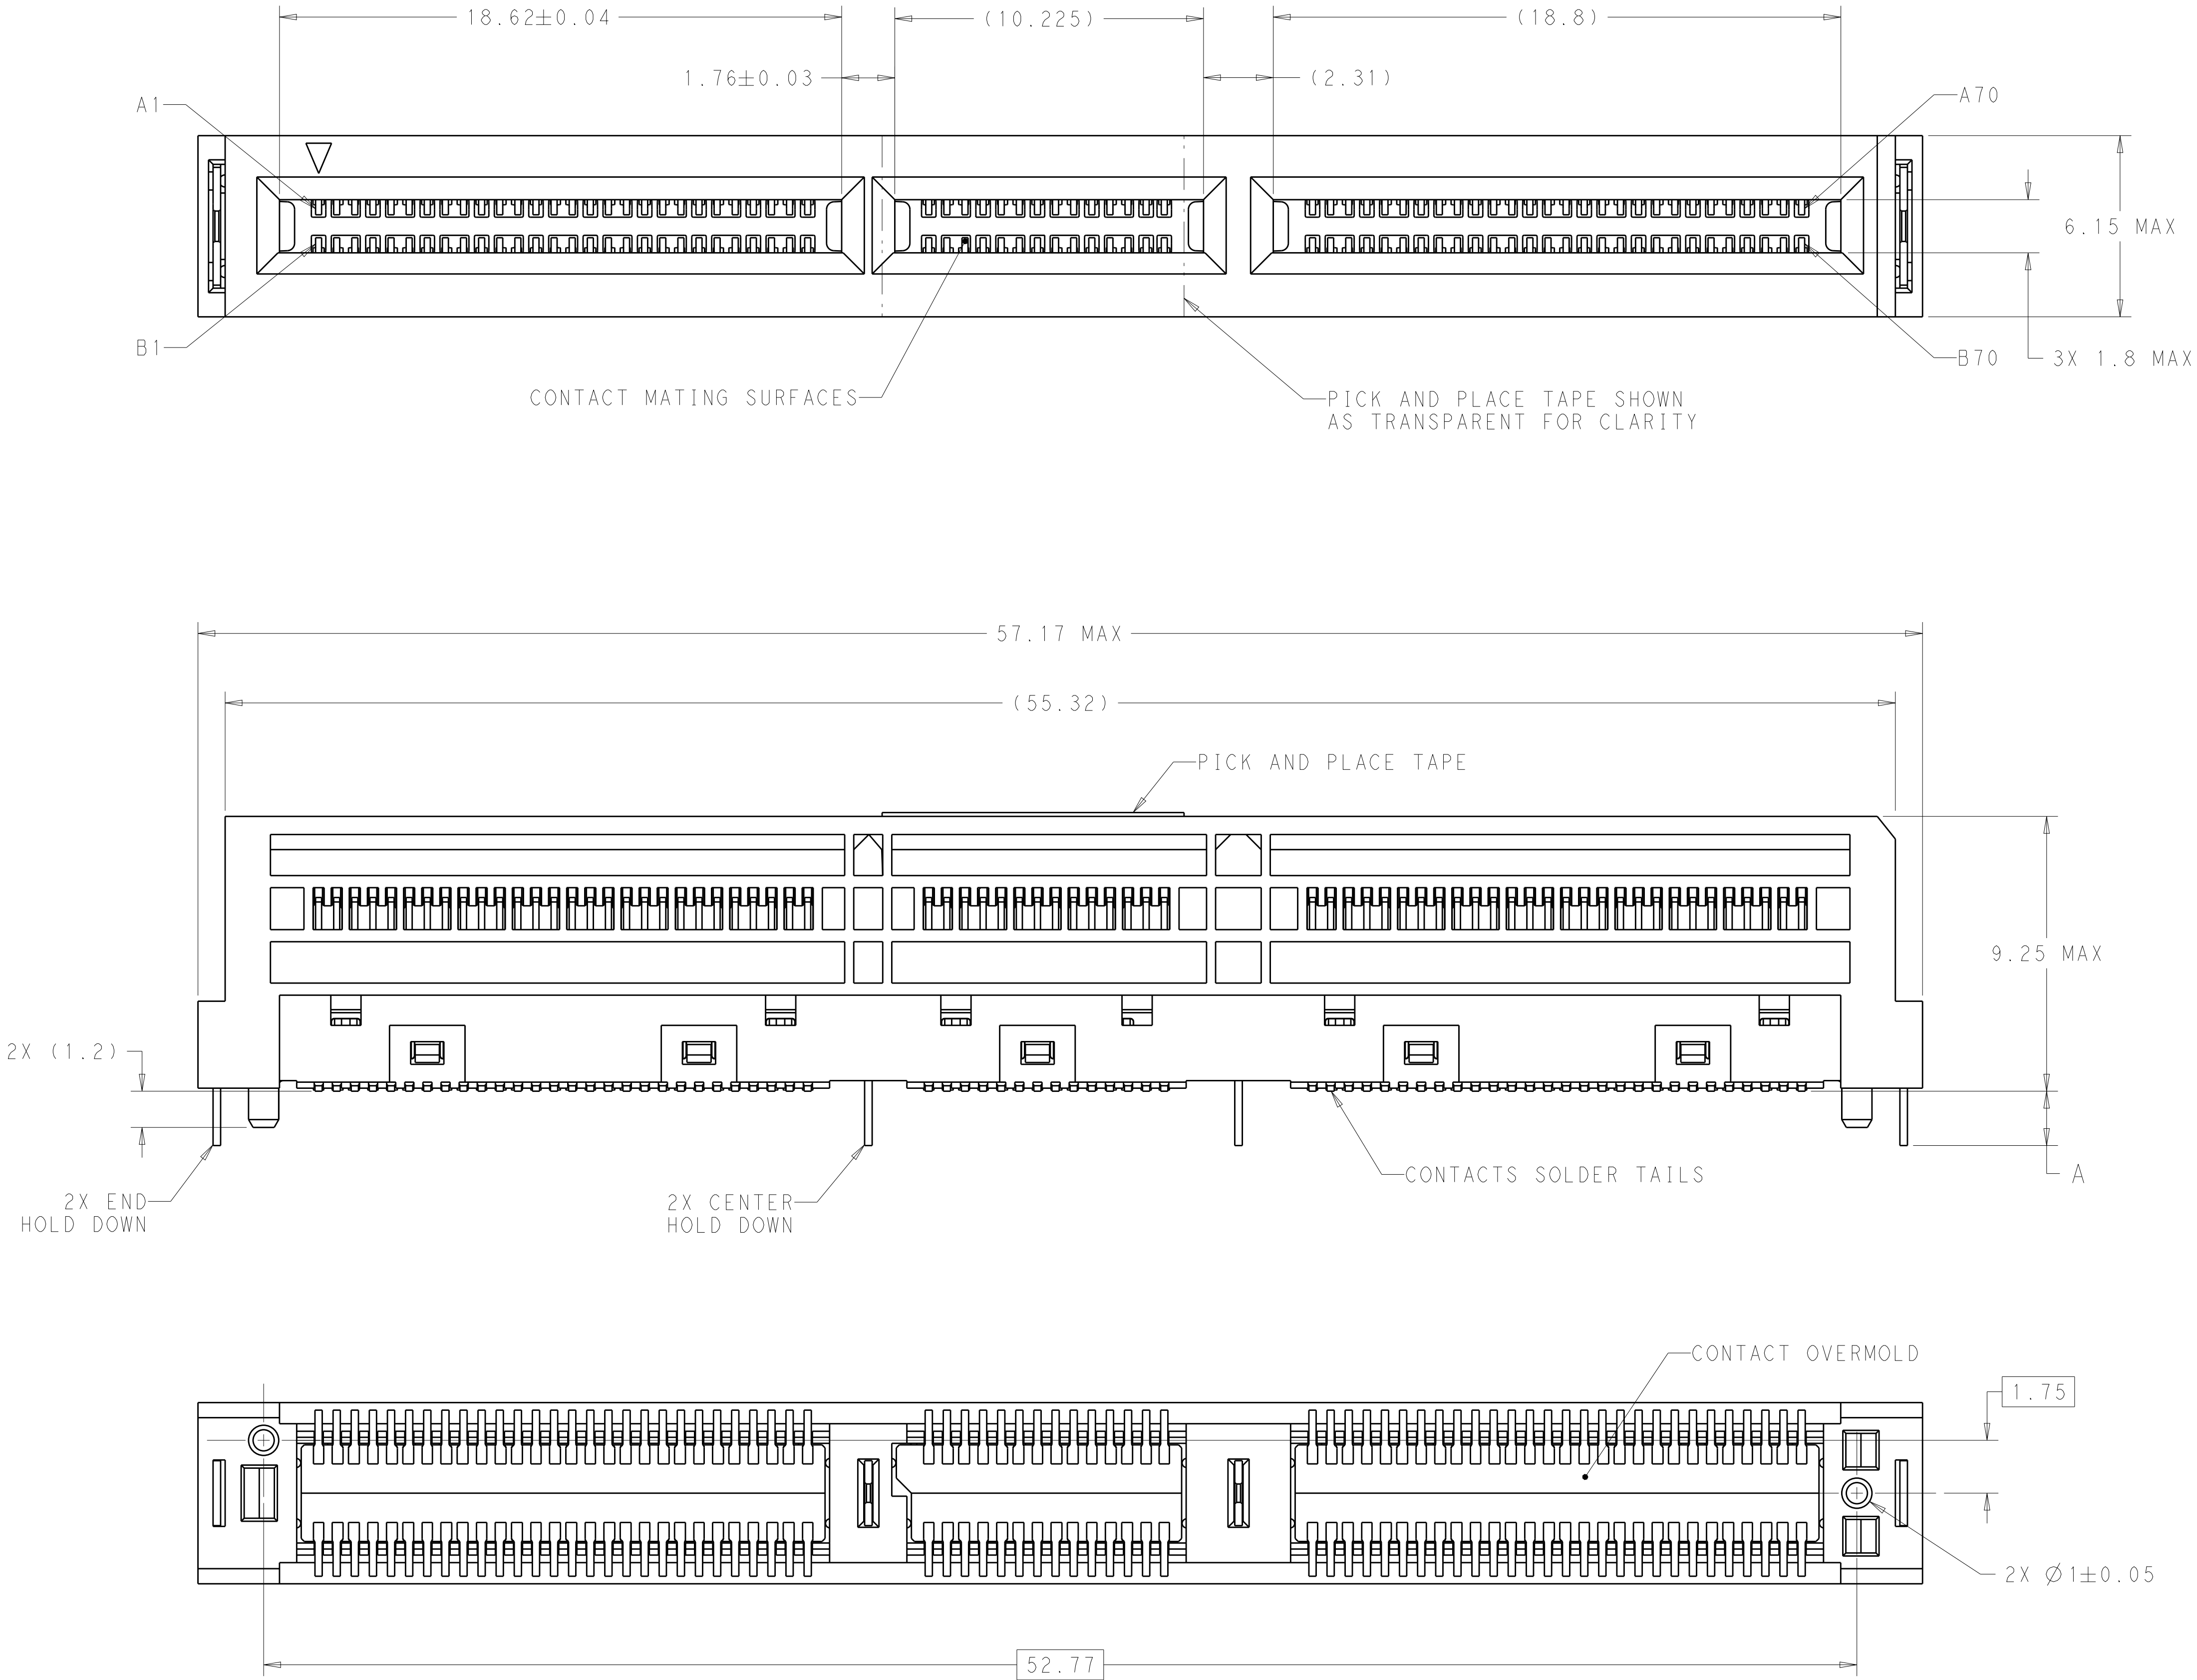

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

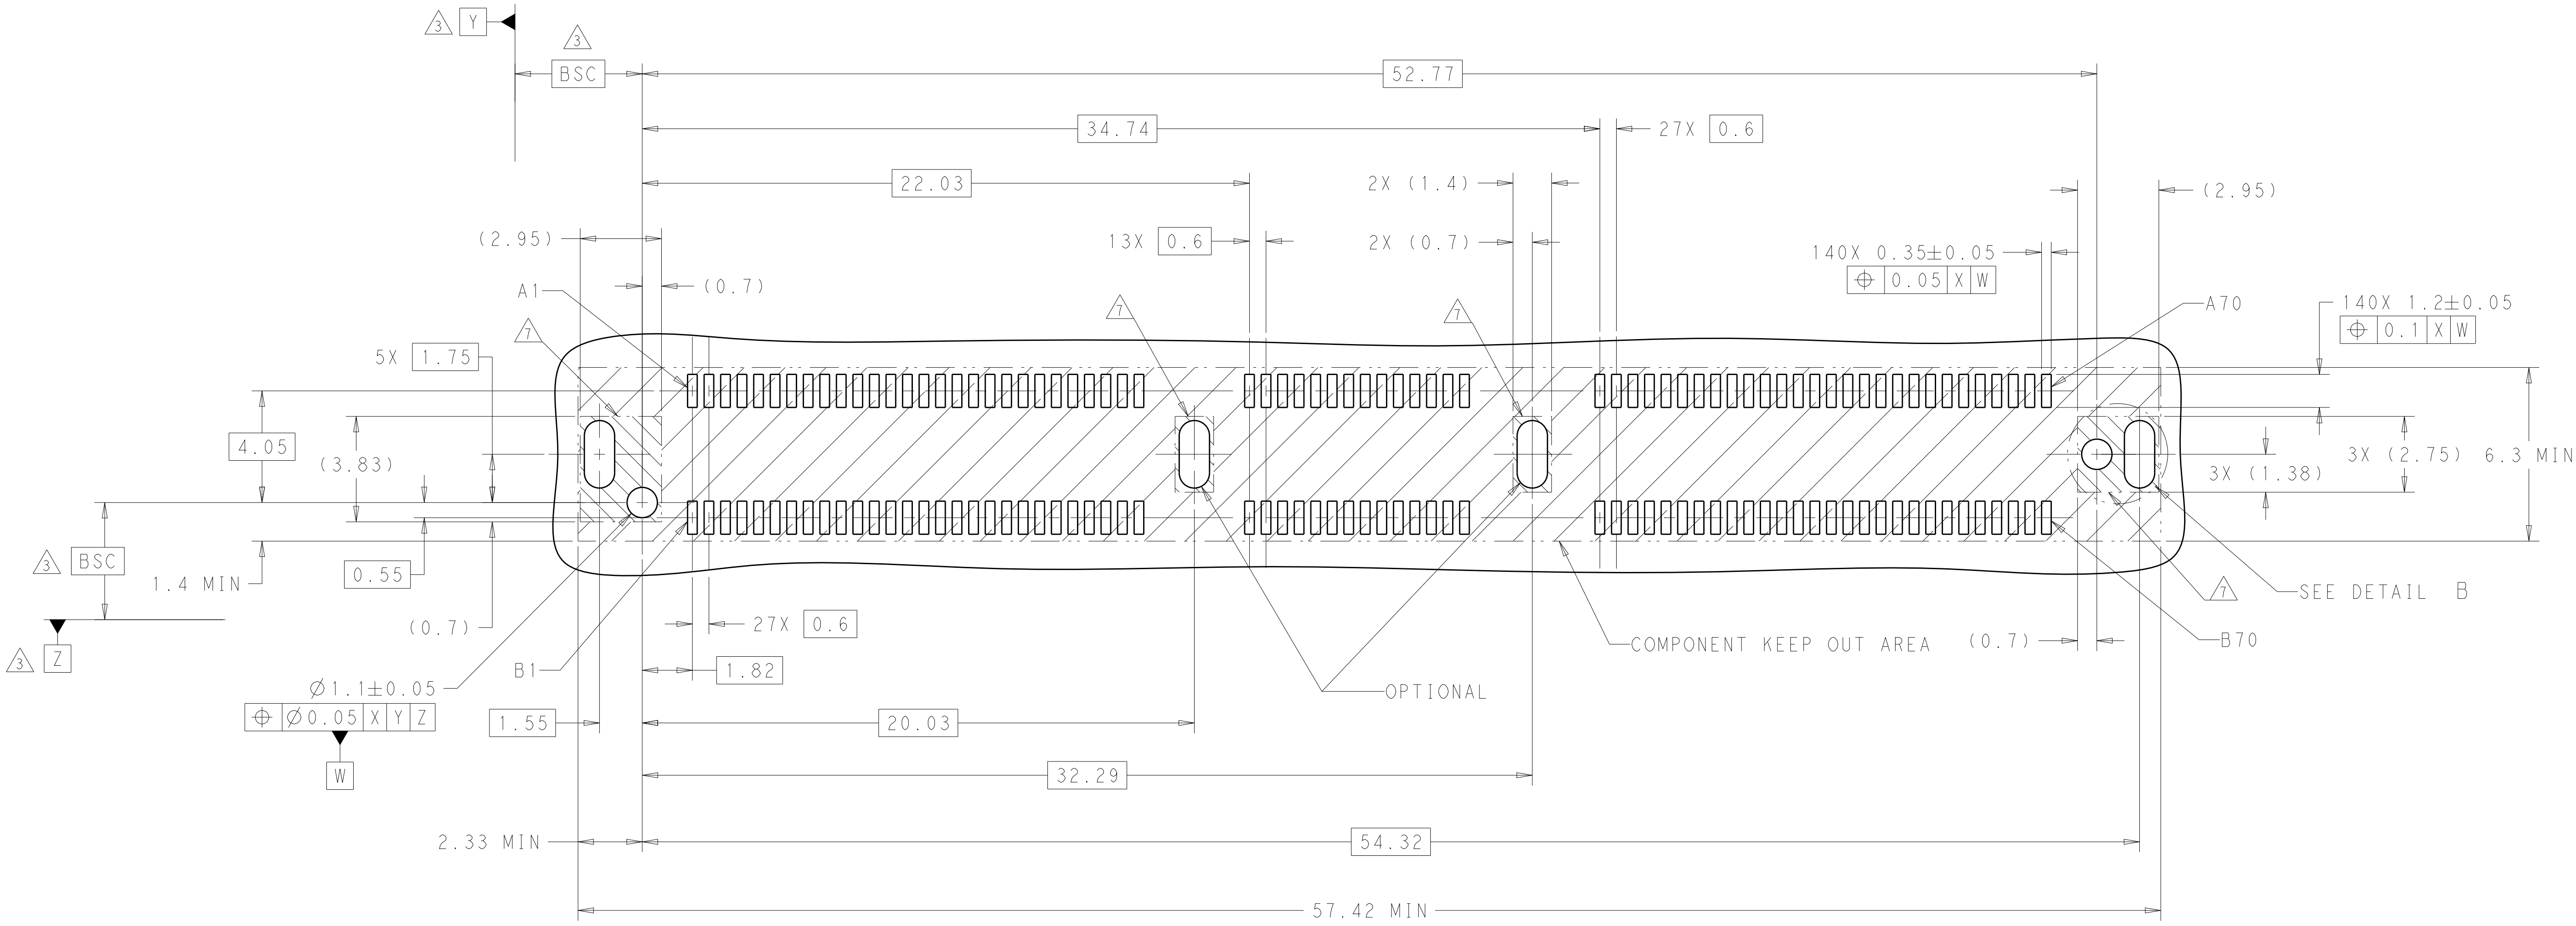

RECOMMENDED PCB LAYOUT
AND KEEP OUT AREA

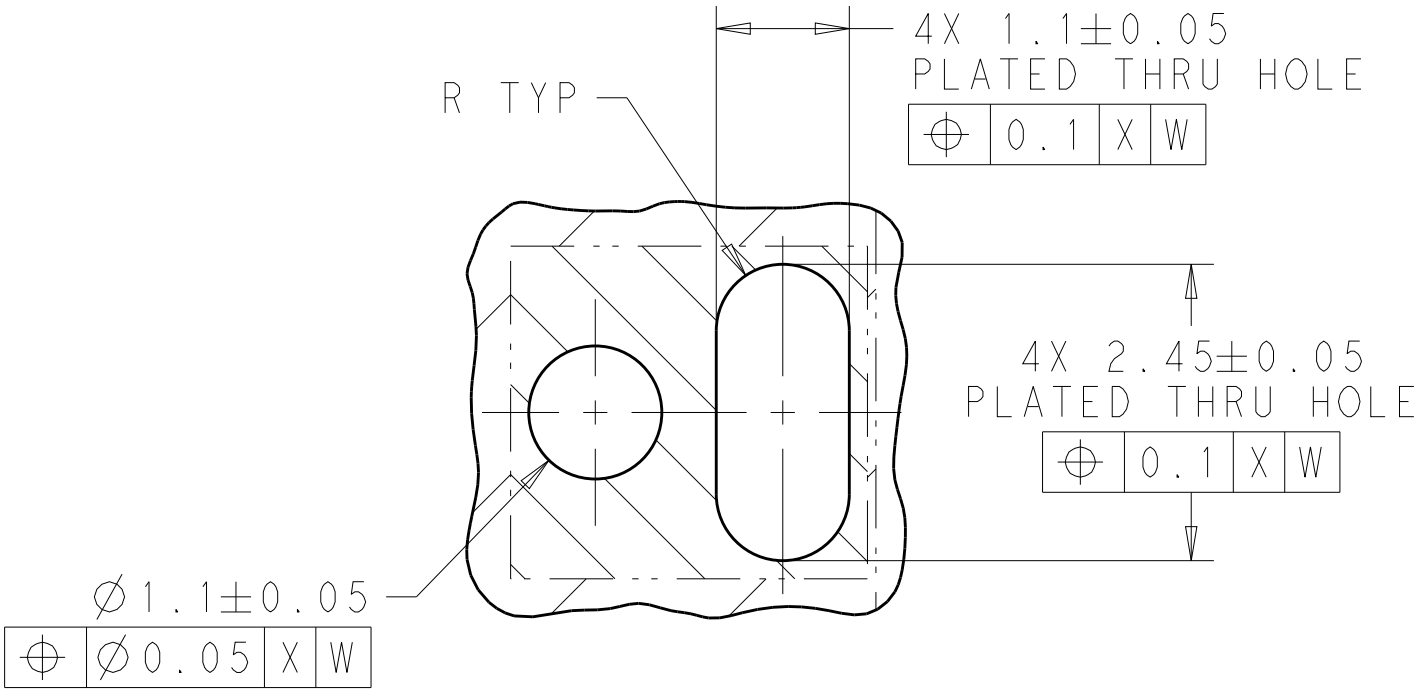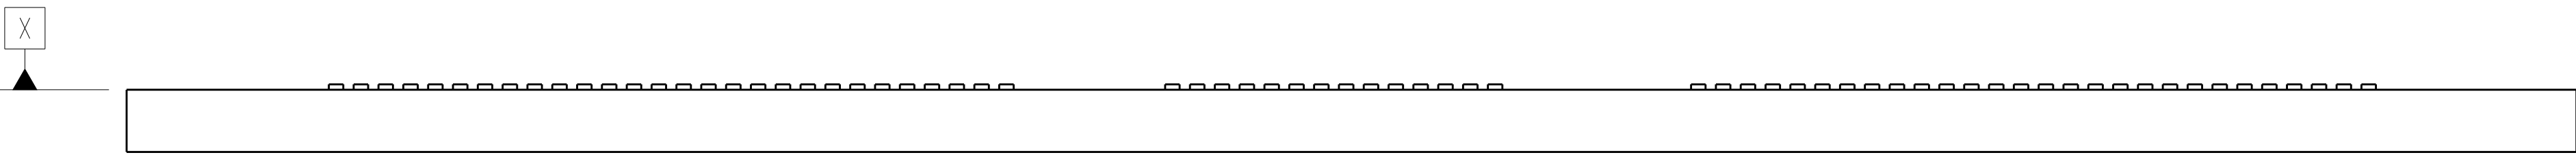

DETAIL B
SCALE 16:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
C. VALENTINE
CHK
D. HARMON
APVD
D. HARMON

16JAN2018
16JAN2018
16JAN2018

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±"

2 PLC ±"

3 PLC ±"

4 PLC ±"

MATERIAL

RECEIPTABLE ASSEMBLY, VERTICAL, 140 POSITION, SLIVER 2.0

SIZE
A1

CAGE CODE
00779

DRAWING NO.
C=2327677

TE Connectivity

NAME


RESTRICTED TO

SCALE 8:1

SHEET 2 OF 4

REV A

4805 (3/13)

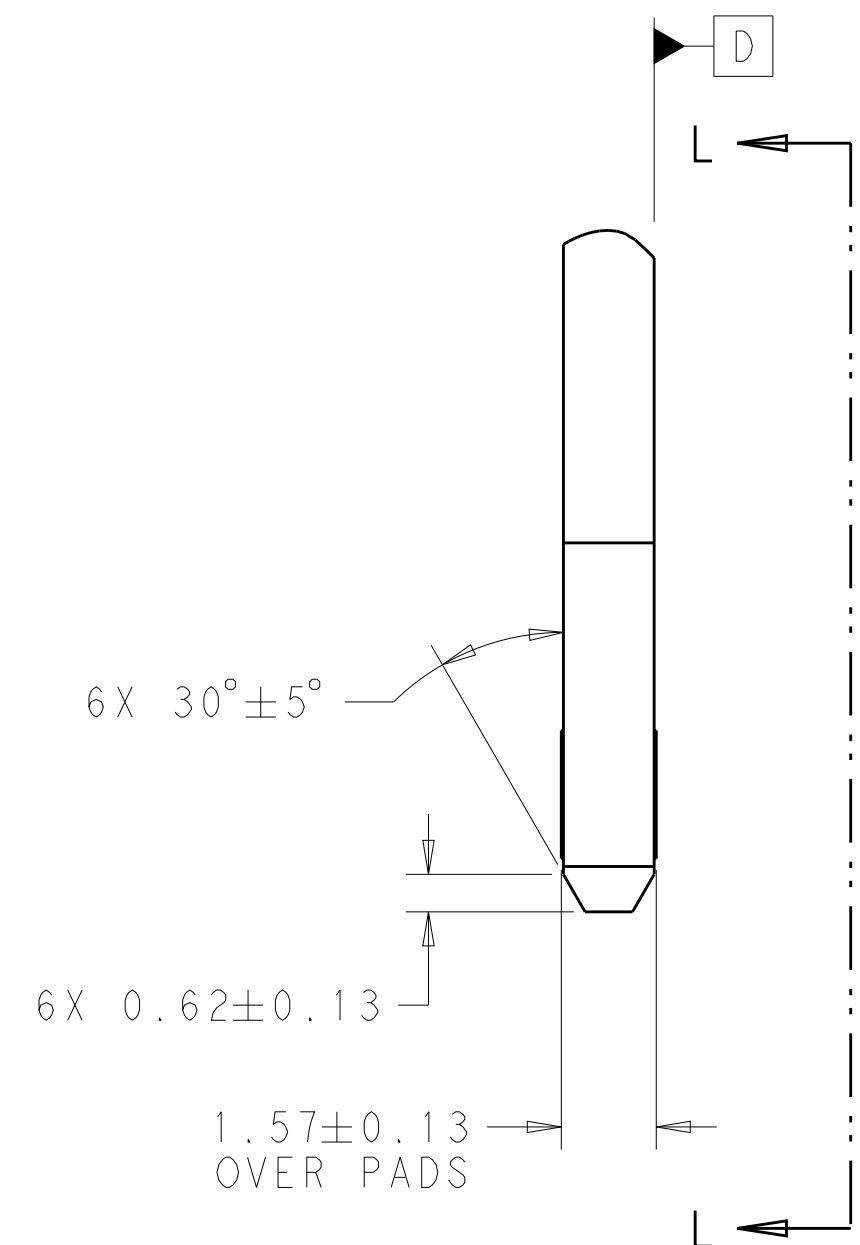

CONTACT POINT
REFERENCE LINE

(2.58)

0.88±0.13

LEVEL 1 SEQUENCE

(0.1)

140X 3±0.13

1.28±0.13

LEVEL 2 SEQUENCE

SPLIT PADS OPTIONAL

4805 (3/13)

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

TABLE 1: CONNECTOR CONTACT IDENTIFICATION  

CONTACT NUMBER	SIDE A	SIDE B
1	GROUND	GROUND
2	SIGNAL	SIGNAL
3	SIGNAL	SIGNAL
4	GROUND	GROUND
5	SIGNAL	SIGNAL
6	SIGNAL	SIGNAL
7	GROUND	GROUND
8	SIGNAL	SIGNAL
9	SIGNAL	SIGNAL
10	GROUND	GROUND
11	SIGNAL	SIGNAL
12	SIGNAL	SIGNAL
13	GROUND	GROUND
14	SIGNAL	SIGNAL
15	SIGNAL	SIGNAL
16	GROUND	GROUND
17	SIGNAL	SIGNAL
18	SIGNAL	SIGNAL
19	GROUND	GROUND
20	SIGNAL	SIGNAL
21	SIGNAL	SIGNAL
22	GROUND	GROUND
23	SIGNAL	SIGNAL
24	SIGNAL	SIGNAL
25	GROUND	GROUND
26	SIGNAL	SIGNAL
27	SIGNAL	SIGNAL
28	GROUND	GROUND
29	GROUND	GROUND
30	SIGNAL	SIGNAL
31	SIGNAL	SIGNAL
32	GROUND	GROUND
33	SIGNAL	SIGNAL
34	SIGNAL	SIGNAL
35	GROUND	GROUND

CONTACT NUMBER	SIDE A	SIDE B
36	SIGNAL	SIGNAL
37	SIGNAL	SIGNAL
38	GROUND	GROUND
39	SIGNAL	SIGNAL
40	SIGNAL	SIGNAL
41	GROUND	GROUND
42	GROUND	GROUND
43	GROUND	GROUND
44	SIGNAL	SIGNAL
45	SIGNAL	SIGNAL
46	GROUND	GROUND
47	SIGNAL	SIGNAL
48	SIGNAL	SIGNAL
49	GROUND	GROUND
50	SIGNAL	SIGNAL
51	SIGNAL	SIGNAL
52	GROUND	GROUND
53	SIGNAL	SIGNAL
54	SIGNAL	SIGNAL
55	GROUND	GROUND
56	SIGNAL	SIGNAL
57	SIGNAL	SIGNAL
58	GROUND	GROUND
59	SIGNAL	SIGNAL
60	SIGNAL	SIGNAL
61	GROUND	GROUND
62	SIGNAL	SIGNAL
63	SIGNAL	SIGNAL
64	GROUND	GROUND
65	SIGNAL	SIGNAL
66	SIGNAL	SIGNAL
67	GROUND	GROUND
68	SIGNAL	SIGNAL
69	SIGNAL	SIGNAL
70	GROUND	GROUND


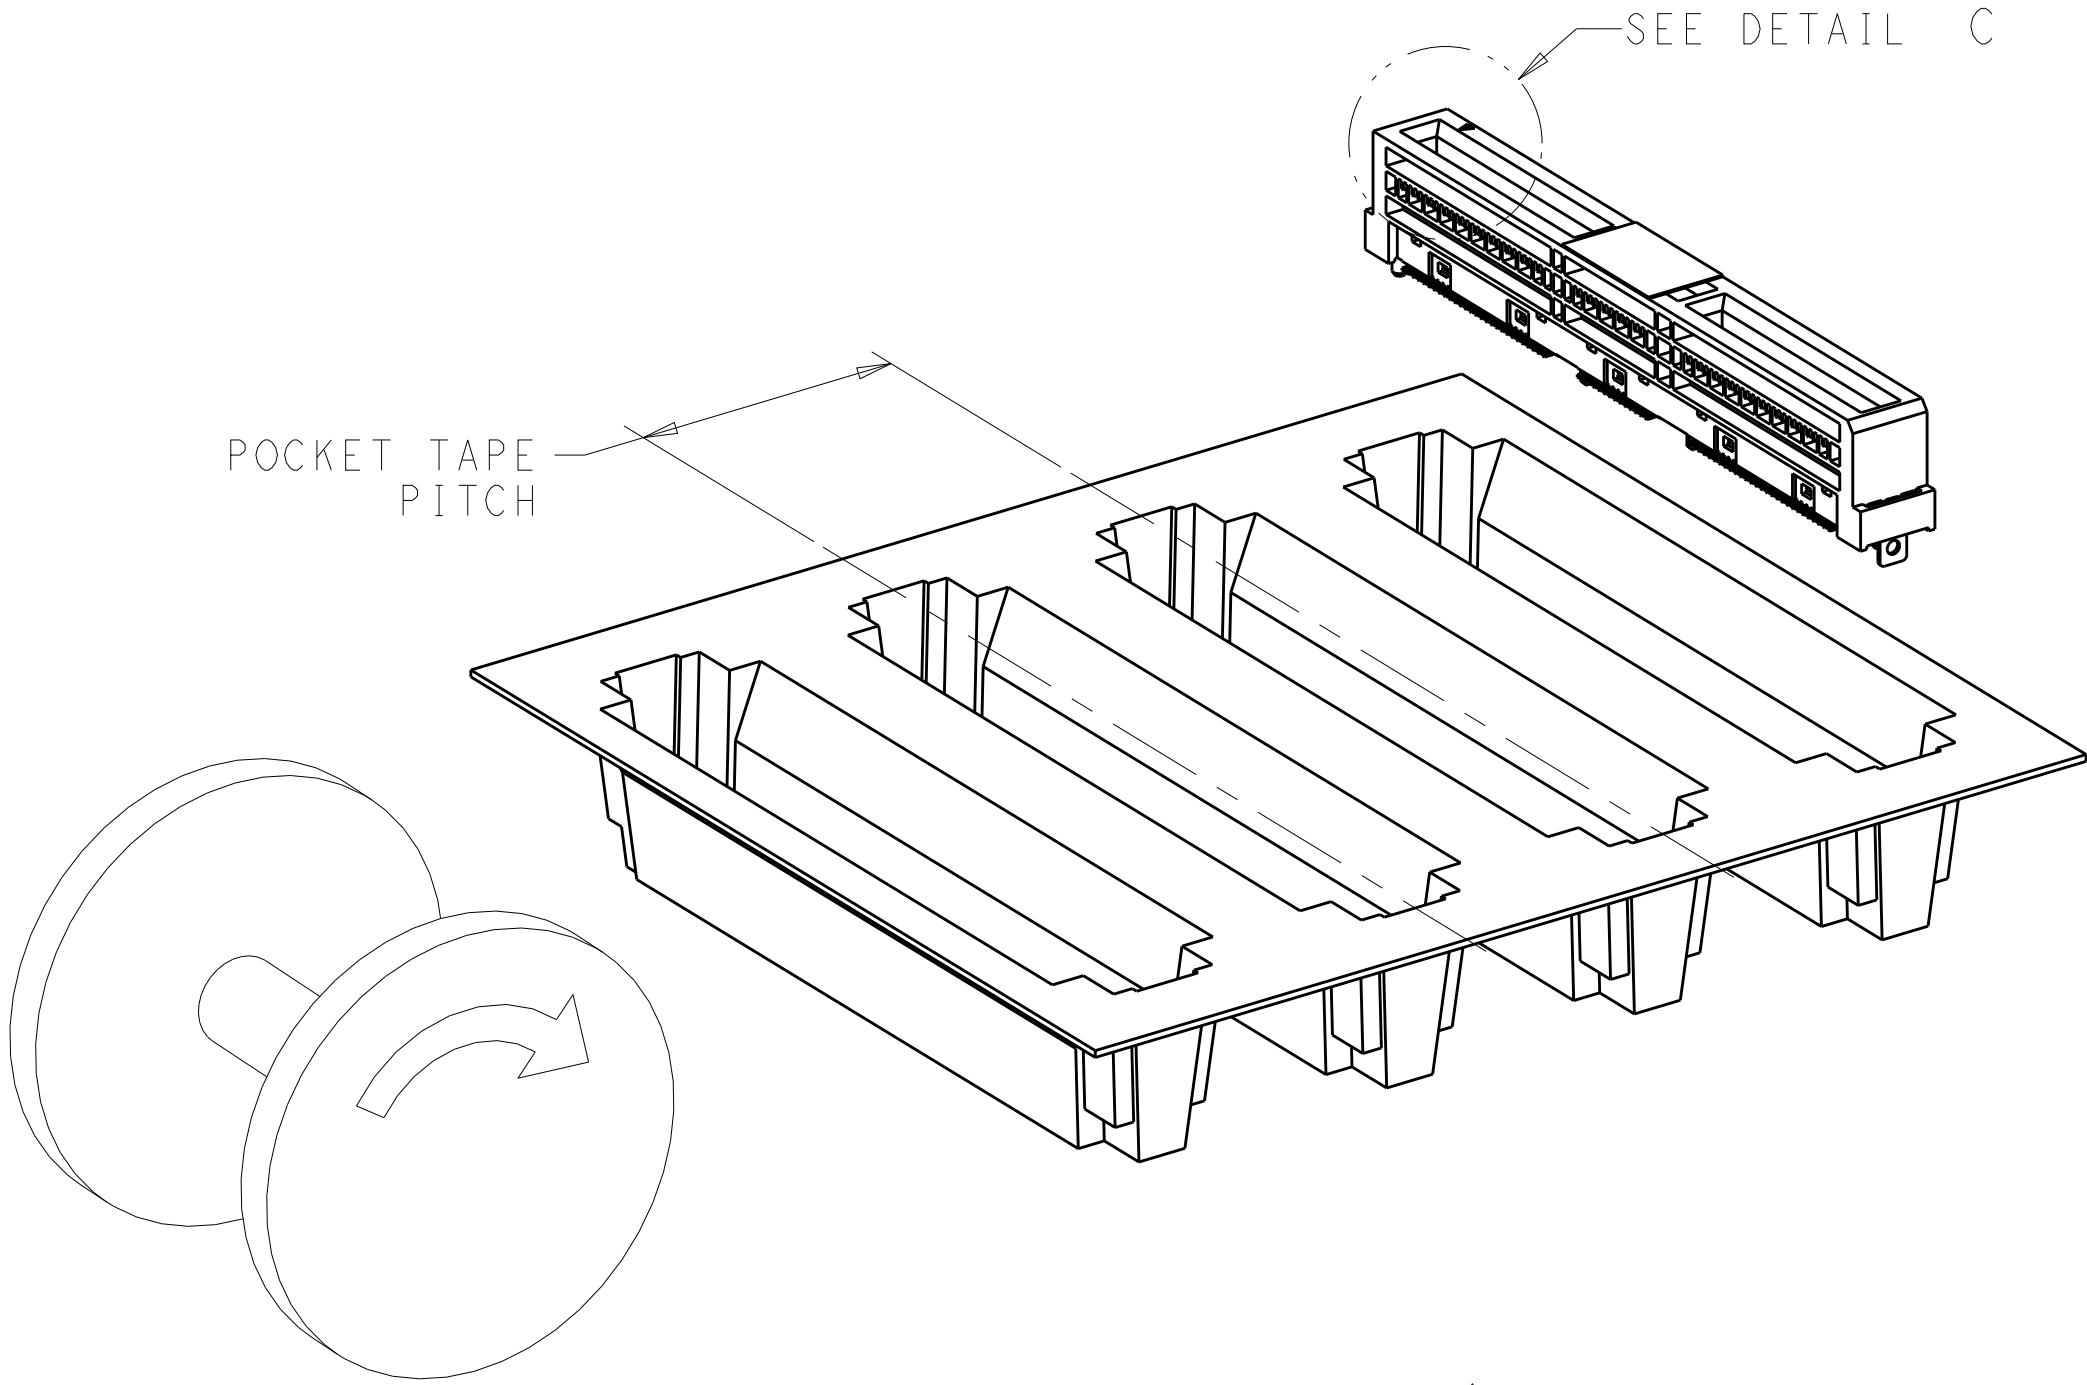



FIGURE 1 
DIRECTION OFF TOP OF REEL
FOR USER UNREELING
SHOWN AS 2327677-1 THRU 2327677-9
SCALE 2:1

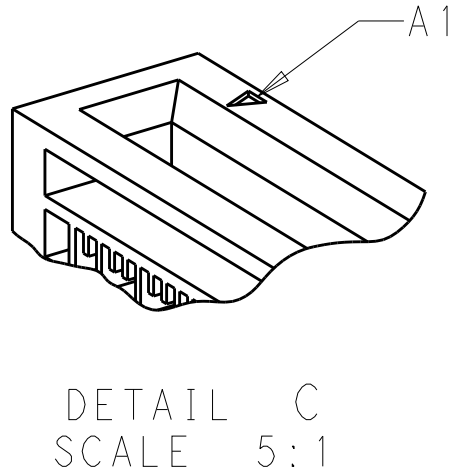

1.4 MAX	ENDS	0.76µm Au	24	250	NO	200	1-2327677-9
		0.38µm Au				100	1-2327677-8
		FLASH Au/PdNi				50	1-2327677-7
1.7 MIN	ENDS	0.76µm Au	24	250	NO	200	1-2327677-6
		0.38µm Au				100	1-2327677-5
		FLASH Au/PdNi				50	1-2327677-4
1.7 MIN	ALL	0.76µm Au	24	250	NO	200	1-2327677-3
		0.38µm Au				100	1-2327677-2
		FLASH Au/PdNi				50	1-2327677-1
1.4 MAX	ENDS	0.76µm Au	20	350	YES	200	2327677-9
		0.38µm Au				100	2327677-8
		FLASH Au/PdNi				50	2327677-7
1.7 MIN	ENDS	0.76µm Au	20	350	YES	200	2327677-6
		0.38µm Au				100	2327677-5
		FLASH Au/PdNi				50	2327677-4
1.7 MIN	ALL	0.76µm Au	20	350	YES	200	2327677-3
		0.38µm Au				100	2327677-2
		FLASH Au/PdNi				50	2327677-1
A	HOLD DOWNS	PLATING	POCKET TAPE PITCH	REEL QUANTITY	PICK AND PLACE TAPE	MATING CYCLES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±°
1 PLC ±°
2 PLC ±°
3 PLC ±°
4 PLC ±°
ANGLES ±°
FINISH

APVD: D. HARMON 16JAN2018

PRODUCT SPEC: 108-130021

APPLICATION SPEC: 114-130008

WEIGHT: -

CUSTOMER DRAWING

DWN: C. VALENTINE 16JAN2018

CHK: D. HARMON 16JAN2018

NAME: RECEPTACLE ASSEMBLY, VERTICAL, 140 POSITION, SLIVER 2.0

SIZE: A1

CAGE CODE: 00779

DRAWING NO: 2327677

RESTRICTED TO: -

SCALE: 8:1

SHEET: 4 OF 4

REV: A

TE Connectivity

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru