

Miniature Fuse, 4.7 x 16 mm, 125 VAC



125 VAC · Quick-Acting F

See below:

[Approvals and Compliances](#)

Description

- Low Breaking Capacity

References

Not recommended for new designs

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Voltage	125 VAC
Rated current	0.063 - 10 A
Breaking Capacity	35 A
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 70 °C
Climatic Category	40/070/56 acc. to IEC 60068-1
Material: Tube	Glass
Unit Weight	1.1 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 , Rated current

Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
-------------------------	--

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type:

Approval Logo	Certificates	Certification Body	Description
GAM T1 NNO			

Application standards

Application standards where the product can be used


Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 62368-1	IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.

Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimension [mm]



Pre-Arcing Time

Rated Current In	1.1 x In min.	1.7 x In max.	3.0 x In max.
0.063 A - 10 A	60 min	60 min	200 ms

Time-Current-Curves

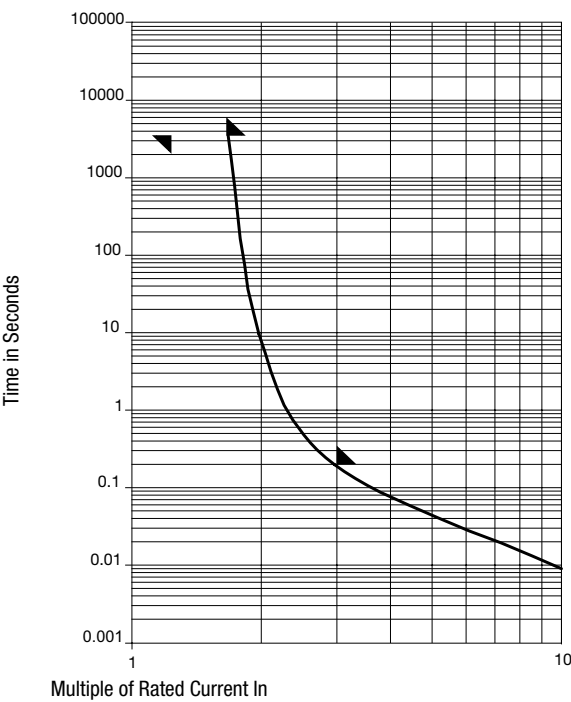

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.1 I _n typ. [mW]	Melting I ² t 10.0 I _n typ. [A ² s]	GAM T1	NNO	Order Number
0.063	125	1)	1900	140	0.00044			7010.2110
0.08	125	1)	1400	150	0.001			7010.2120
0.1	125	1)	1200	155	0.0015	●	●	7010.2130
0.15	125	1)	960	190	0.0067	●	●	7010.2150
0.2	125	1)	870	240	0.012	●	●	7010.2170
0.25	125	1)	795	270	0.025	●	●	7010.2180
0.31	125	1)	825	360	0.036	●	●	7010.2190
0.4	125	1)	1950	955	0.03	●		7010.2210
0.5	125	1)	1500	905	0.079	●	●	7010.2220
0.63	125	1)	2200	1650	0.092	●	●	7010.2230
0.75	125	1)	1700	1550	0.13	●	●	7010.2240
1	125	1)	275	385	0.2	●	●	7010.2260
1.5	125	1)	270	560	0.63	●	●	7010.2410
2	125	1)	175	470	1.2	●	●	7010.2430
2.5	125	1)	155	515	3.4	●	●	7010.2440
3	125	1)	155	610	4.8	●	●	7010.2450
4	125	1)	210	1160	7.8	●	●	7010.2470
5	125	1)	145	935	14	●	●	7010.2480
6.3	125	1)	130	1040	31	●		7010.2610
8	125	1)	100	1060	68			7010.2620
10	125	1)	120	1480	110	●		7010.2630

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 35 A @ 125 VAC , p.f. ≥ 0.9

Packaging Unit Small Box Pack (10 pcs.)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru