



RoHS compliant

FEATURES

- **Small size and light weight**

For space saving, the outside dimensions of the main body are reduced to be 21.5 mm (length) × 14.4 mm (width) × 37 mm (height) (.846 × .567 × 1.457 inch) and the weight is also reduced to be approx. 19 g .67 oz (direct coupling 1 Form A, 1 Form B type)

- **Low operating power (1.4W) type is available (1 Form A, 1 Form B)**

• **Since the terminal arrangement complies with JIS D5011 B4-M1, commercial connectors are available for these types of relays.**

- **Superior inrush characteristics**

Despite its small size, 120A (max. 0.1 s) capacity has been achieved by using contacts that are good at withstanding inrush currents and because of an ingenious contacting mechanism. (1 Form A and 1 Form B)

TYPICAL APPLICATIONS

- **Motorcycles and automobiles**

Motorcycle cell motors, car air conditioners, halogen lamps, etc.

- **Agricultural equipment**

• **Battery equipped devices such as conveyance vehicles**

ORDERING INFORMATION

CA - - -

Contact arrangement

1a: 1 Form A

1b: 1 Form B

1: 1 Form C

Protective construction

Nil: Sealed type

F: Dust cover type

Nominal operating power

Nil: Standard type (1.8 W)

S: Low operating power type (1.4 W) (1 Form A, 1 Form B)

Protective element

Nil: None (Standard type)

R: With resistor inside

Coil voltage (DC)

12 V, 24 V (1 Form C only)

Mounting method

A: Rubber bracket A type (1 Form A, 1 Form B)

N: Screw mounting type

C: Direct coupling type

Classification by type

Nil: 1 Form C

5: 1 Form A or 1 Form B

CA

TYPES

Contact arrangement	Coil voltage	Mounting type	Standard type		Low operating power type	
			Sealed type	Dust cover type	Sealed type	Dust cover type
			Part No.	Part No.	Part No.	Part No.
1 Form A	12 V DC	Rubber bracket A	CA1a-12V-A-5	CA1aF-12V-A-5	CA1aS-12V-A-5	CA1aFS-12V-A-5
		Screw-mounting	CA1a-12V-N-5	CA1aF-12V-N-5	CA1aS-12V-N-5	CA1aFS-12V-N-5
		Direct coupling	CA1a-12V-C-5	CA1aF-12V-C-5	CA1aS-12V-C-5	CA1aFS-12V-C-5
1 Form B	12 V DC	Rubber bracket A	CA1b-12V-A-5	CA1bF-12V-A-5	CA1bS-12V-A-5	CA1bFS-12V-A-5
		Screw-mounting	CA1b-12V-N-5	CA1bF-12V-N-5	CA1bS-12V-N-5	CA1bFS-12V-N-5
		Direct coupling	CA1b-12V-C-5	CA1bF-12V-C-5	CA1bS-12V-C-5	CA1bFS-12V-C-5
1 Form C	12 V DC	Screw-mounting	CA1-12V-N	—	—	—
		Direct coupling	CA1-12V-C	—	—	—
	24 V DC	Screw-mounting	CA1-24V-N	—	—	—
		Direct coupling	CA1-24V-C	—	—	—

Standard packing: Carton: 20 pcs. Case: 200 pcs.
Note: Please use “CA**R-*** or CA**SR-***” built-in resistor type. (Asterisks “*” should be filled in from ORDERING INFORMATION.)

RATING

1. Coil data

	Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Usable voltage range
Standard type 1 Form A and 1 Form B	12 V DC	Max. 8 V DC	0.6 to 6 V DC	150 mA	80Ω	1.8 W	10 to 16V DC
Low operating power type 1 Form A and 1 Form B	12 V DC	Max. 8 V DC	0.6 to 6 V DC	120 mA	100Ω	1.4 W	10 to 16V DC
1 Form C	12 V DC	Max. 8 V DC	Min. 0.6 V DC	150 mA	80Ω	1.8 W	10 to 15V DC
	24 V DC	Max. 16 V DC	Min. 1.2 V DC	75 mA	320Ω	1.8 W	20 to 30V DC

Note: Other pick-up voltage types are also available. Please contact us for details.

2. Specifications

1) 12 V DC type

Characteristics	Item		Specifications		
			1 Form A type	1 Form B type	1 Form C type
Contact	Arrangement		1 Form A	1 Form B	1 Form C
	Contact resistance (Initial)		Typ 3mΩ (By voltage drop 6V DC 1A)		
	Contact voltage drop		Max. 0.3 V [(after electrical life test, by voltage drop 12 V DC 20 A (1.4 W type), 12 V DC 30 A (1.8 W type)]	Max. 0.3 V (after electrical life test, by voltage drop 12 V DC 20 A)	Max. 0.4 V (after electrical life test, by voltage drop 12 V DC 20 A)
	Contact material		Ag alloy (Cadmium free)		
Rating	Nominal switching capacity (resistive load)		20 A 12V DC (1.4 W type) 30 A 12V DC (1.8 W type)	20 A 12 V DC	
	Max. carrying current (at coil applied voltage 14 V DC, 80°C 176°F)		20 A continuous (1.4 W type) 30 A for 1 min. (1.8 W type)	20 A continuous	20 A continuous
	Nominal operating power		1.4 W/1.8 W		1.8 W
	Min. switching capacity (resistive load)*1		1 A 12V DC		
Electrical characteristics	Insulation resistance (Initial)		Min. 10 MΩ (at 500V DC)		Min. 10 MΩ (at 500V DC)
	Breakdown voltage (Initial)	Between open contacts	500 Vrms for 1 min. (Detection current: 10mA)		
		Between contacts and coil	500 Vrms for 1 min. (Detection current: 10mA)		
	Operate time (at 20°C 68°F)		Max. 10ms (at nominal voltage) (excluding contact bounce time) (Initial)		
Release time (at 20°C 68°F)		Max. 10ms (at nominal voltage) (excluding contact bounce time) (Initial)			
Mechanical characteristics	Shock resistance	Functional	Min. 200 m/s ² {20G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs)	Min. 100 m/s ² {10G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs)	
		Destructive	Min. 1,000 m/s ² {100G} (Half-wave pulse of sine wave: 6ms)		
	Vibration resistance	Functional	Rubber bracket A type: 50 Hz to 500 Hz, Min. 100 m/s ² {10G} Screw-mounting and direct coupling type: 33 Hz, Min. 44.1 m/s ² {4.5G} (Detection time: 10μs)		
		Destructive	Rubber bracket A type: 50 Hz to 500 Hz, Min. 100 m/s ² {10G} Screw-mounting and direct coupling type: 33 Hz, Min. 44.1 m/s ² {4.5G}, Time of vibration for each direction; X, Y direction: 2 hours, Z direction: 4 hours		
Expected life	Electrical (at nominal switching capacity)		Min. 10 ⁵ (operating frequency: 2s ON, 2s OFF) (1.4 W and 1.8 W type at 20 A) Min. 2 × 10 ⁴ (operating frequency: 3s ON, 15s OFF) (1.8 W type at 30 A)	Min. 10 ⁵ (operating frequency: 2s ON, 2s OFF)	
	Mechanical		Min. 10 ⁶ (at 120 cpm)		Min. 5 × 10 ⁵ (at 120 cpm)
Conditions	Conditions for operation, transport and storage*2		Ambient temperature: −30°C to +80°C −22°F to +176°F, Humidity: 5% R.H. to 85% R.H. (Not freezing and condensing at low temperature)		
	Max. operating speed		15 cpm (1.4 W type: at nominal load, 1.8 W type: at 20 A)	15 cpm (at nominal switching capacity)	
Water-proof standard	Water-proof standard		Sealed type: JIS D 0203 S2, Dust cover type: JIS D 0203 R2		
Mass			Rubber bracket A type: 23 g .81 oz, Screw-mounting and direct coupling type: 19 g .67 oz		31 g 1.09 oz

Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

*2. The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Please refer to “Usage ambient condition” in CAUTIONS FOR USE OF AUTOMOTIVE RELAYS.

2) 24 V DC type

Characteristics	Item	Specifications
		1 Form C type
Contact	Arrangement	1 Form C
	Contact resistance (Initial)	Typ 3mΩ (By voltage drop 6V DC 1A)
	Contact voltage drop	Max. 0.4 V (after electrical life test, by voltage drop 24 V DC 10 A)
	Contact material	Ag alloy (Cadmium free)
Rating	Nominal switching capacity (resistive load) (operating frequency: 2s ON, 2s OFF)	10 A 24V DC
	Max. carrying current	10 A continuous (at coil applied voltage 28 V DC, 80°C 176°F)
	Nominal operating power	1.8 W
	Min. switching capacity (resistive load)**1	1 A 24V DC
Electrical characteristics	Insulation resistance (Initial)	Min. 10 MΩ (at 500V DC)
	Breakdown voltage (Initial)	Between open contacts 500 Vrms for 1 min. (Detection current: 10mA)
		Between contacts and coil 500 Vrms for 1 min. (Detection current: 10mA)
	Operate time (at nominal voltage) (at 20°C 68°F)	Max. 10ms (excluding contact bounce time) (Initial)
Mechanical characteristics	Release time (at nominal voltage) (at 20°C 68°F)	Max. 10ms (excluding contact bounce time) (Initial)
	Shock resistance	Functional Min. 100 m/s ² {10G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs)
		Destructive Min. 1,000 m/s ² {100G} (Half-wave pulse of sine wave: 6ms)
	Vibration resistance	Functional 33 Hz, Min. 44.1 m/s ² {4.5G} (Detection time: 10μs)
		Destructive 33 Hz, Min. 44.1 m/s ² {4.5G}, Time of vibration for each direction; X, Y direction: 2 hours, Z direction: 4 hours
Expected life	Electrical (at nominal switching capacity)	Min. 10 ⁵ (operating frequency: 2s ON, 2s OFF)
	Mechanical	Min. 5 × 10 ⁵ (at 120 cpm)
Conditions	Conditions for operation, transport and storage**2	Ambient temperature: -30°C to +80°C -22°F to +176°F, Humidity: 5% R.H. to 85% R.H. (Not freezing and condensing at low temperature)
	Max. operating speed	15 cpm (nominal switching capacity)
Water-proof standard	Water-proof standard	JIS D 0203 S2
Mass		31 g 1.09 oz

Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

*2. The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Please refer to "Usage ambient condition" in CAUTIONS FOR USE OF AUTOMOTIVE RELAYS.

Electrical life

	Nominal coil voltage	Motor load (operating frequency ON: 2 s, OFF: 2 s)	Halogen lamp load (operating frequency ON: 1 s, OFF: 14 s)
1 Form A and 1 Form B type	12 V DC	Min. 10 ⁵ , 20 A 12 V DC	Min. 10 ⁵ , 20 A 12 V DC
1 Form C type	12 V DC	Min. 10 ⁵ , 20 A 12 V DC	Min. 10 ⁵ , 20 A 12 V DC
	24 V DC	Min. 10 ⁵ , 10 A 24 V DC	Min. 10 ⁵ , 6 A 24 V DC

REFERENCE DATA

1. Coil temperature rise


Samples: CA1aS-12V-N-5, 5pcs.

Measured portion: Inside the coil


Contact carrying current: 20A

Ambient temperature: Room temperature, 85°C


185°F

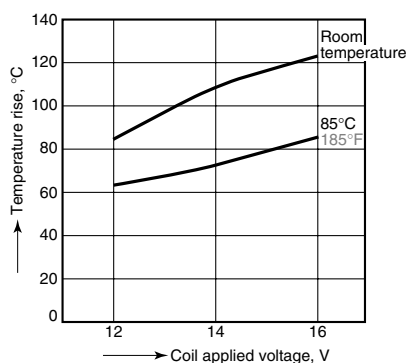


2. Max. switching capability (Resistive load, initial)

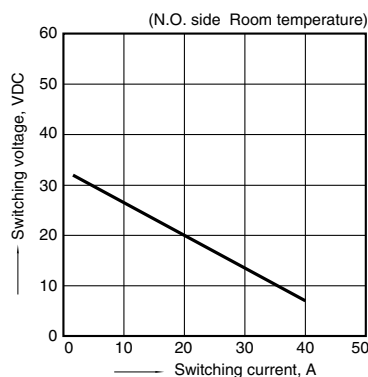


3. Ambient temperature and operating voltage range

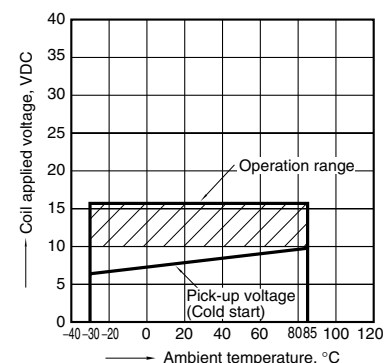


4. Ambient temperature characteristics
(Cold start)
Samples: CA1bS-12V-N-5

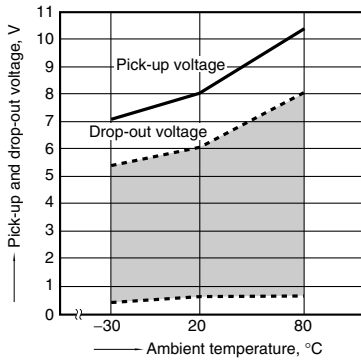

5. Distribution of pick-up and drop-out voltage
Quantity: 50pcs.

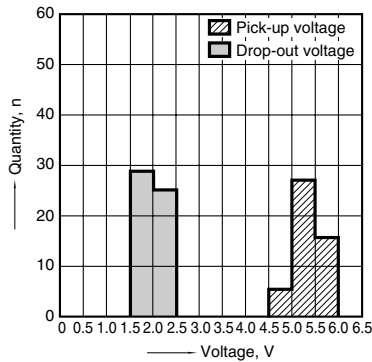


6. Operate and release time characteristics
Sample: CA1a-12V-N-5, 10pcs.

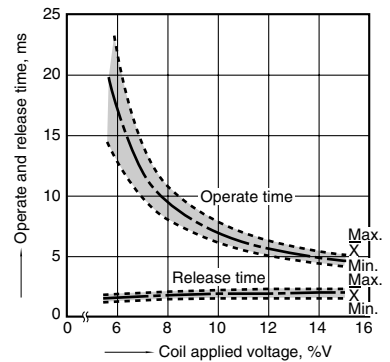


7-(1). Electrical life test (Motor load)
Sample: CA1a-12V-C, 3pcs.
Load: Inrush current: 63A, steady current: 23A
Blower fan motor actual load (motor free)
Operating frequency: ON 2s, OFF 2s
Ambient temperature: Room temperature


Load current waveform
Load: Inrush current: 63A, steady current: 23A,

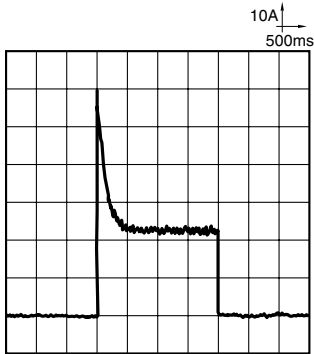

Change of pick-up and drop-out voltage

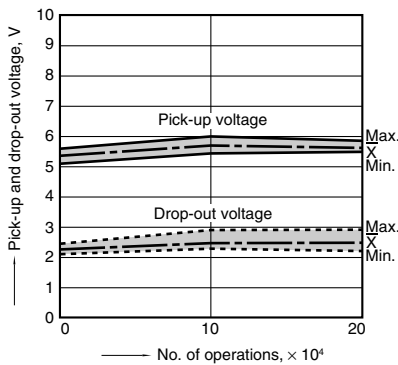


Change of contact resistance

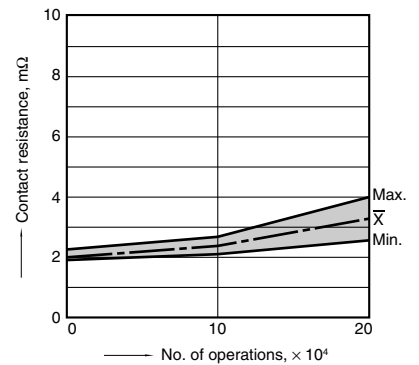


7-(2). Electrical life test (Lamp load)
Sample: CA1a-12V-C, 3pcs.
Load: 60Wx4, Inrush current: 110A, steady current: 20A
Halogen lamp actual load
Operating frequency: ON 1s, OFF 14s
Ambient temperature: Room temperature


Load current waveform
Load: Inrush current: 110A, steady current: 20A,

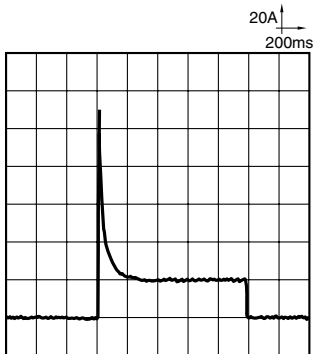

Change of pick-up and drop-out voltage

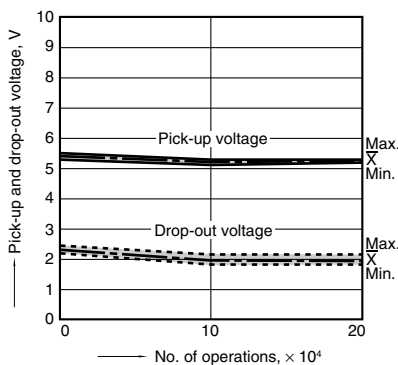

Change of contact resistance

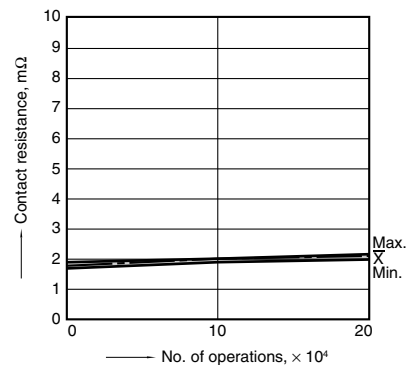

Technical drawings of the 1000 Series 1/2" components. The left drawing shows a side view of a component with a total width of 21.5 (±.846) and a total height of 37 (±1.457). The right drawing shows a side view of a component with a total width of 17.4 (±.65) and a total height of 25.098. The right drawing also shows a top view with a width of 14.4 (±.567) and a height of 10 (±.394). The right drawing also shows a side view with a width of 15 (±.591) and a height of 15 (±.591).

Technical drawing of a 1/2-20 UNF-2A x 1.50 inch Hex Flange Nipple. The drawing shows a side view of the hexagonal flange with dimensions in inches and millimeters. Key dimensions include: overall width 19.5 (493), hex width 17 (430), hex height 6 (152), and various thread and flange diameters.

<u>Dimension:</u>	<u>General tolerance</u>
Max. 1mm .039 inch:	±0.1 ±.004
1 to 3mm .039 to .118 inch:	±0.2 ±.008
Min. 3mm .118 inch:	±0.3 ±.012

Technical drawing of a 1/2-18 UNF-2B plug-in nut. The drawing includes three views: a front view, a side view, and a top view. Dimensions are provided in inches (in) and millimeters (mm).

Front View Dimensions:

- Overall height: 1.457 in (37 mm)
- Overall width: 21.5 .846 in (547 mm)
- Top flange outer diameter: 14 in (355 mm)
- Top flange thickness: .551 in (14 mm)
- Threaded section height: 17.5 in (443 mm)
- Threaded section outer diameter: 7 in (178 mm)
- Threaded section inner diameter: .276 in (7 mm)
- Bottom flange thickness: .689 in (17.5 mm)

Side View Dimensions:

- Overall height: 14.4 in (366 mm)
- Top flange outer diameter: .567 in (14.4 mm)
- Top flange thickness: 3.118 in (79.2 mm)
- Threaded section height: 2.079 in (52.8 mm)
- Bottom flange thickness: .685 in (17.4 mm)
- Bottom flange outer diameter: 17.4 in (441 mm)

Top View Dimensions:

- Overall width: 19.5 .768 in (497 mm)
- Overall height: 9 in (229 mm)
- Top flange outer diameter: .354 in (9 mm)
- Top flange thickness: 5.5 in (140 mm)
- Threaded section height: .217 in (5.5 mm)
- Threaded section outer diameter: 15.4 in (391 mm)
- Threaded section inner diameter: 12.4 in (315 mm)
- Threaded section outer diameter: .488 in (12.4 mm)
- Threaded section inner diameter: .8 in (20.3 mm)
- Threaded section outer diameter: .031 in (0.8 mm)
- Threaded section inner diameter: 2.4 in (61 mm)
- Threaded section outer diameter: .094 in (2.4 mm)
- Threaded section inner diameter: 6 in (152 mm)
- Threaded section outer diameter: .236 in (6 mm)

Notes:

- 6.5 $\pm .03$ dia. hole
- 256 $^{+0.012}_{-0}$ dia.
- R10

Dimensional Tolerances:

- Max. 1mm
- 1 to 3mm
- Min. 3mm

1 Form A

1 Form B

Note: Including resistor type also available.

Including resistor
(1 Form A)


<u>Dimension:</u>	<u>General tolerance</u>
Max. 1mm .039 inch:	$\pm 0.1 \pm .004$
1 to 3mm .039 to .118 inch:	$\pm 0.2 \pm .008$
Min. 3mm .118 inch:	$\pm 0.3 \pm .012$

3. 1 Form A/1 Form B Direct coupling type


CAD Data



External dimensions

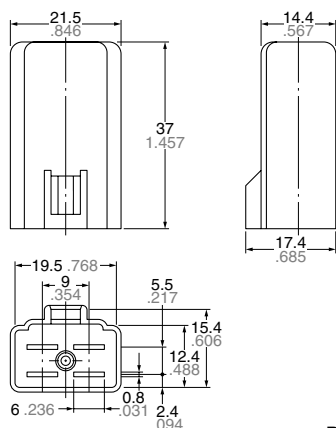

Schematic (Bottom View)

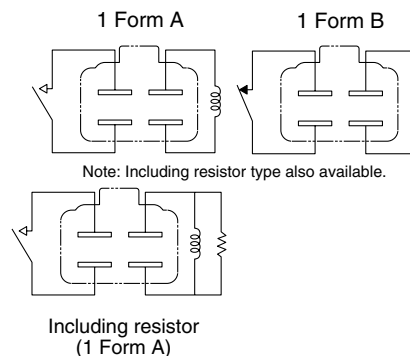

Dimension:

Max. 1mm .039 inch:

1 to 3mm .039 to .118 inch:

Min. 3mm .118 inch:

General tolerance

$\pm 0.1 \pm .004$

$\pm 0.2 \pm .008$


$\pm 0.3 \pm .012$

4. 1 Form C Screw-mounting type


CAD Data



External dimensions

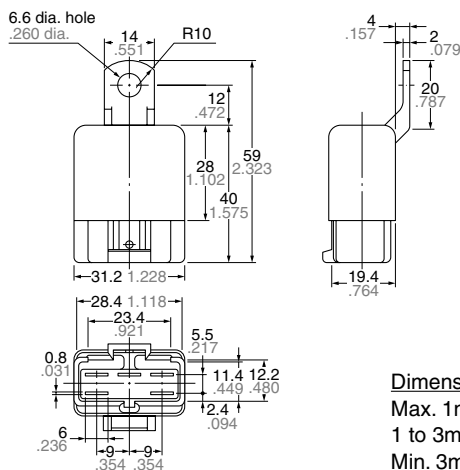

Schematic (Bottom View)



Dimension:

Max. 1mm .039 inch:

1 to 3mm .039 to .118 inch:

Min. 3mm .118 inch:

General tolerance

$\pm 0.1 \pm .004$

$\pm 0.2 \pm .008$


$\pm 0.3 \pm .012$

5. 1 Form C Direct coupling type


CAD Data



External dimensions

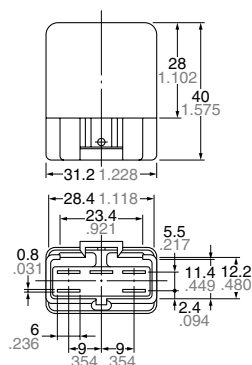

Schematic (Bottom View)



Dimension:

Max. 1mm .039 inch:

1 to 3mm .039 to .118 inch:

Min. 3mm .118 inch:

General tolerance

$\pm 0.1 \pm .004$

$\pm 0.2 \pm .008$

$\pm 0.3 \pm .012$

For Cautions for Use, see Relay Technical Information.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru