

PmodGYRO™ Reference Manual

Revision: August 3, 2011

Note: This document applies to Rev. A of the board.




1300 NE Henley Court, Suite 3
Pullman, WA 99163
(509) 334 6306 Voice | (509) 334 6300 Fax

Overview

The PmodGYRO is a peripheral module featuring the STMicroelectronics® L3G4200D MEMS motion sensor. The L3G4200D provides a three-axis digital output gyroscope with built in temperature sensor.

Features include:

- Standard SPI and I²C™ interface
- 250/500/2000dps Selectable Resolutions
- Two customizable interrupt pins
- Power-down and Sleep Mode
- User configurable signal filtering

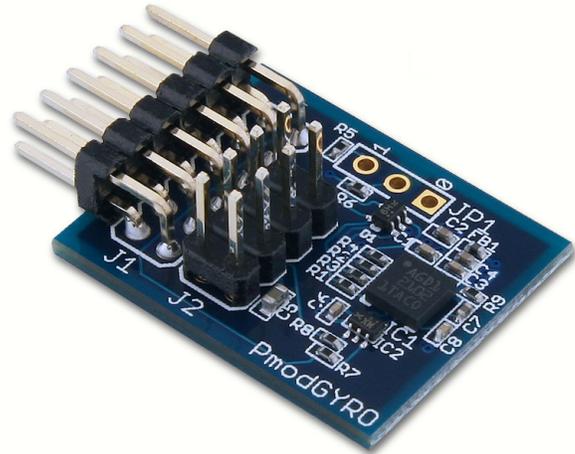

Functional Description

The PmodGYRO uses a standard 12-pin connection and communicates via SPI or I²C, defaulting to I²C communication. A pull-up resistor on the CS line keeps the device in I²C mode unless the CS line is driven low by the master device

Interface

When communicating with the device the master must provide a register address and a flag specifying whether the subsequent action is a read or write. The actual transfer of data follows this command. Through this method, the user can either configure the device by writing to specific control registers within the device, or read back data from separate read-only registers.

Two interrupts directly map to pins available to the user on connector J1 of the PmodGYRO. The configuration of INT1, present on pin 7 of J1, is entirely user customizable. The main use of INT1 stems from high and low events on the three axes about which the gyroscope measures angular speed. By default, the INT1

is disabled. The second interrupt, INT2, is primarily used for data ready and FIFO interrupts and maps to pin 8 on J1.

For more information about the control registers, data collection, and interrupt settings available for user configuration, see the data sheet for the L3G4200D on the STMicroelectronics® website.

SPI Communication

The SPI interface uses three or four signal lines for communication depending on the current configuration of the device. These are Chip Select (CS), Serial Data In (SDI) or simply Serial Data (SDA) in 3-wire SPI mode, Serial Data Out (SDO), and Serial Clock (SCL). The PmodGYRO defaults to the 4-wire operating mode. In order to use the 3-wire mode, a control register must be written to. For more detailed SPI communication, refer to the device data sheet.

I²C Communication

The I²C standard uses two signal lines, I²C data (SDA) and serial clock (SCL). The device supports both standard, 100 kHz, and fast, 400 kHz, serial clocks. In accordance with I²C protocol, the L3G4200D has a device specific 7-bit address used by the serial master to communicate with multiple devices on a data bus. The device uses the address 110100xb, where pin 3 on J1 (SDO/SA0) defines the least-significant-bit (LSB). By default, the LSB of the address will be '1' due to a pull-up resistor on JP1 as shown by the schematic available on the Digilent website. While the default value is '1', by simply connecting pin 3 on J1 to the ground rail the user can change the LSB to a '0'. This user selectable bit enables two PmodGYROs to be used on the same I²C bus. The data sheet for the L3G4200D contains further device specific I²C information.

Connector J1 – SPI Communications		
Pin	Signal	Description
1	CS	Chip Select
2	SDA/SDI/ SDO	Serial Data In
3	SDO/SA0	Serial Data Out/LSB of I ² C Device Address
4	SCL/SPC	Serial Clock
5	GND	Power Supply Ground
6	VCC	Power Supply (3.3V)
7	INT1	Programmable Interrupt
8	INT2	Data Ready/FIFO Interrupt
9	NC	Not Connected
10	NC	Not Connected
11	GND	Power Supply Ground
12	VCC	Power Supply (3.3V)
Connector J2 – I ² C Communication		
Pin	Signal	Description
1 & 2	SCL/SPC	Serial Clock
3 & 4	SDA/SDI/ SDO	Serial Data
5 & 6	GND	Power Supply Ground
7 & 8	VCC	Power Supply (3.3V)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru