



# Heat Exchangers

TUBE TO FIN, LIQUID-TO-AIR HEAT EXCHANGERS

ATS tube-to-fin, liquid-to-air heat exchangers are made with the industry's highest density fins to maximize heat transfer from liquid to air, allowing the liquid to be cooled to lower temperatures than other heat exchangers on the market. The heat exchanger fins and tubes are made of copper and stainless steel to be suitable for a variety of fluids, including water, dielectric fluids and custom designed heat transfer fluids.

Each of the seven heat exchanger sizes is available with or without a fan. ATS heat exchangers can be used in laser cooling, medical equipment and imaging devices, compressor cooling, semiconductor processing, HVAC, food and beverage processing, and other liquid cooling applications.




## GENERAL FEATURES

- » Length: 5.8 to 21.9"
- » Width: 5.8 to 14"
- » Height: 1.8 to 2.6"
- » Tube diameter: 0.375 and 0.5"
- » Copper tubes
- » Copper fins
- » High-efficiency and high density fin design
- » Silver-solder brazed joints
- » Internally cleaned and corrosion protected
- » Externally coated for corrosion protection
- » Can be customized for different fans
- » 100% pressure tested

## APPLICATIONS


- » Automotive
- » Aerospace
- » Medical
- » Laser cooling
- » Electronics Cooling
- » Compressor Cooling
- » Semiconductor Processing
- » HVAC

For further information, please contact  
Advanced Thermal Solutions, Inc. at  
**1-781-769-2800** or **www.qats.com**

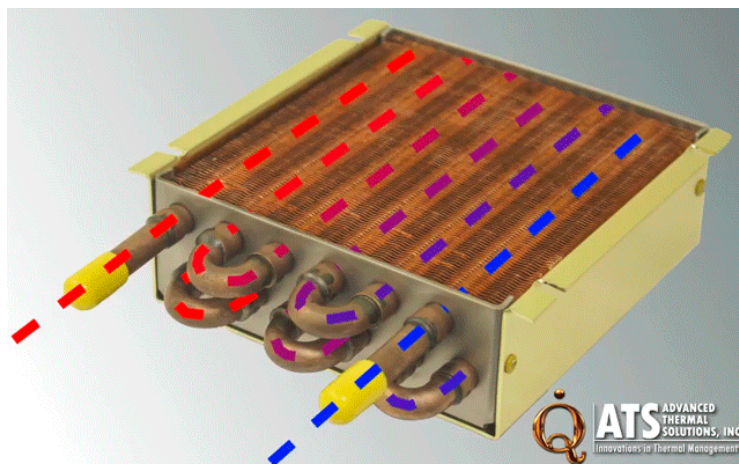




**ATS-HE20 SERIES**

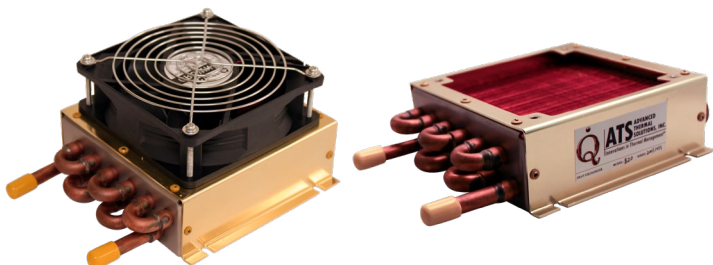


- » Heat transfer capacity up to 22W per  $\Delta T = 1^\circ C$
- » 5.8 x 5.8 x 1.8" core size
- »  $\Delta T$  = inlet liquid temperature - inlet air temperature
- » Weight: 1077g (2.4 lbs), Weight w/fan: 1411g (3.1 lbs)
- » Maximum pressure: 100 psi

MPN	FAN TYPE	# OF FANS	FAN SIZE (inches)
ATS-HE20-C1-R0	NO FAN	0	N/A
ATS-HE20-C2-R0	12V	1	4.25 Square
ATS-HE20-C3-R0	12V PWM	1	4.25 Square
ATS-HE20-C4-R0	24V	1	4.25 Square
ATS-HE20-C5-R0	24V PWM	1	4.25 Square
ATS-HE20-C6-R0	48V	1	4.25 Square
ATS-HE20-C7-R0	48V PWM	1	4.25 Square

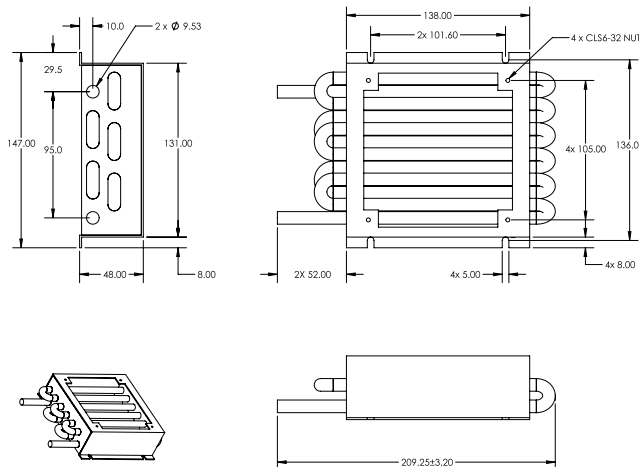


**ATS-HE21 SERIES**

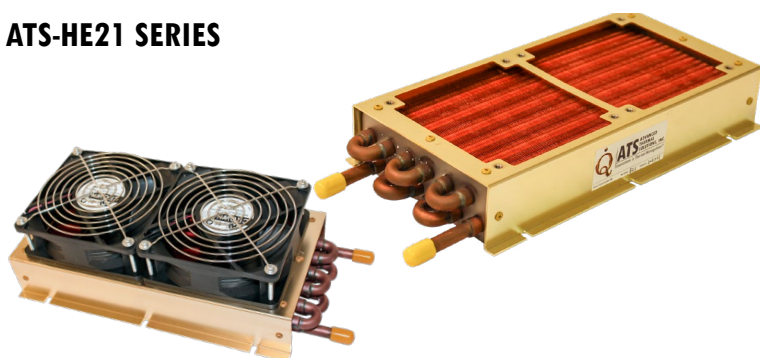

- » Heat transfer capacity up to 46W per  $\Delta T = 1^\circ C$
- » 10.5 x 5.8 x 1.8" core size
- »  $\Delta T$  = inlet liquid temperature - inlet air temperature
- » Weight: 1759g (3.9 lbs); Weight w/fan: 2405g (5.3 lbs)
- » Maximum pressure: 100 psi

MPN	FAN TYPE	# OF FANS	FAN SIZE (inches)
ATS-HE21-C1-R0	NO FAN	0	N/A
ATS-HE21-C2-R0	12V	2	4.25 Square
ATS-HE21-C3-R0	12V PWM	2	4.25 Square
ATS-HE21-C4-R0	24V	2	4.25 Square
ATS-HE21-C5-R0	24V PWM	2	4.25 Square
ATS-HE21-C6-R0	48V	2	4.25 Square
ATS-HE21-C7-R0	48V PWM	2	4.25 Square

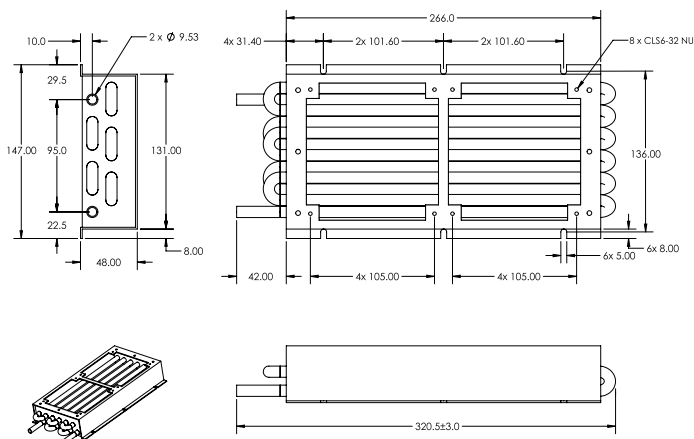




**ATS-HE22 SERIES**




MPN	FAN TYPE	# OF FANS	FAN SIZE (inches)
ATS-HE22-C1-R0	NO FAN	0	N/A
ATS-HE22-C2-R0	12V	1	6.75 Round
ATS-HE22-C3-R0	12V PWM	1	6.75 Round
ATS-HE22-C4-R0	24V	1	6.75 Round
ATS-HE22-C5-R0	24V PWM	1	6.75 Round
ATS-HE22-C6-R0	48V	1	6.75 Round
ATS-HE22-C7-R0	48V PWM	1	6.75 Round

- » Heat transfer capacity up to 64W per  $\Delta T = 1^{\circ}\text{C}$
- » 9.5 x 9.0 x 2.5" core size
- »  $\Delta T =$  inlet liquid temperature - inlet air temperature
- » Weight: 2211g (4.9 lbs); Weight w/fan: 2854g (6.23 lbs)
- » Maximum pressure: 100 psi

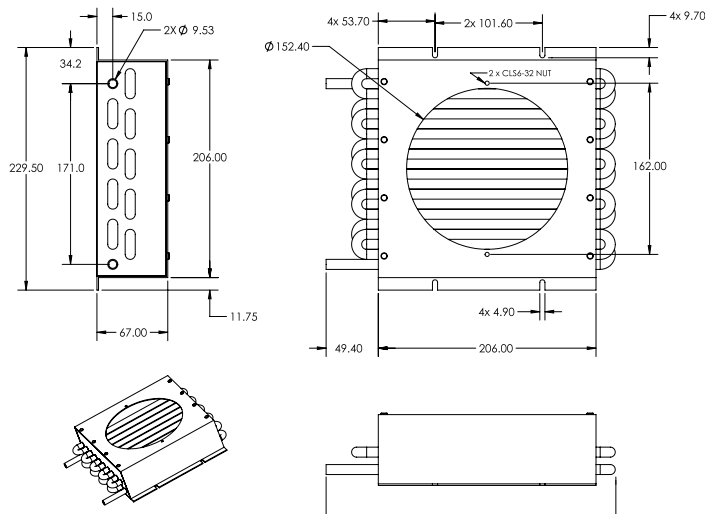


**ATS-HE23 SERIES**

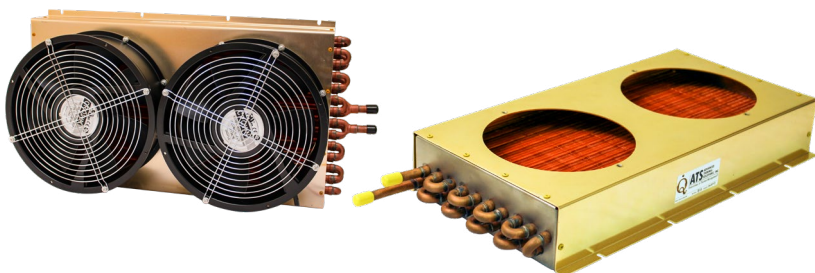


MPN	FAN TYPE	# OF FANS	FAN SIZE (inches)
ATS-HE23-C1-R0	NO FAN	0	N/A
ATS-HE23-C2-R0	12V	2	6.75 Round
ATS-HE23-C3-R0	12V PWM	2	6.75 Round
ATS-HE23-C4-R0	24V	2	6.75 Round
ATS-HE23-C5-R0	24V PWM	2	6.75 Round
ATS-HE23-C6-R0	48V	2	6.75 Round
ATS-HE23-C7-R0	48V PWM	2	6.75 Round

- » Heat transfer capacity up to 117W per  $\Delta T = 1^{\circ}\text{C}$
- » 17.5 x 9.0 x 2.5" core size
- »  $\Delta T =$  inlet liquid temperature - inlet air temperature
- » Weight: 7000g (15.4 lbs); Weight w/fan: 7600g (16.8 lbs)
- » Maximum pressure: 100 psi

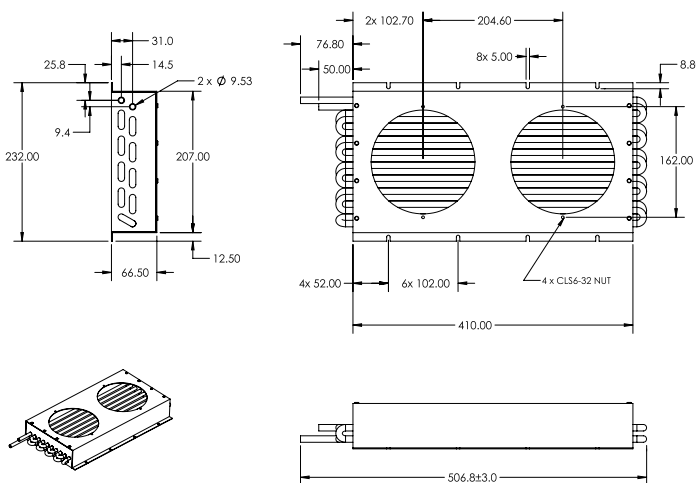




**ATS-HE24 SERIES**

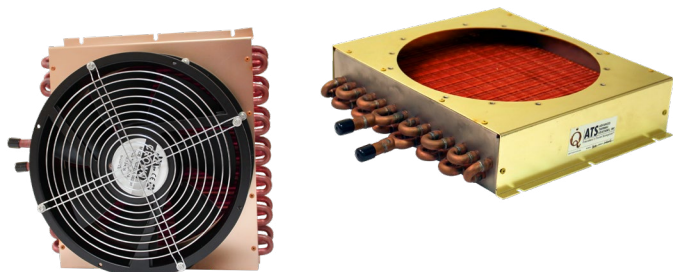


MPN	FAN TYPE	# OF FANS	FAN SIZE (inches)
ATS-HE24-C1-R0	NO FAN	0	N/A
ATS-HE24-C2-R0	12V	1	10.0 Round
ATS-HE24-C3-R0	12V PWM	1	10.0 Round
ATS-HE24-C4-R0	24V	1	10.0 Round
ATS-HE24-C5-R0	24V PWM	1	10.0 Round
ATS-HE24-C6-R0	48V	1	10.0 Round
ATS-HE24-C7-R0	48V PWM	1	10.0 Round

- » Heat transfer capacity up to 97W per  $\Delta T = 1^{\circ}\text{C}$
- » 11.5 (L) x 12.0 (W) x 2.12 (H)" core size
- »  $\Delta T$  = inlet liquid temperature - inlet air temperature
- » Weight: 4018g (8.9 lbs); Weight w/fan: 5791g (12.8 lbs)
- » Maximum pressure: 100 psi

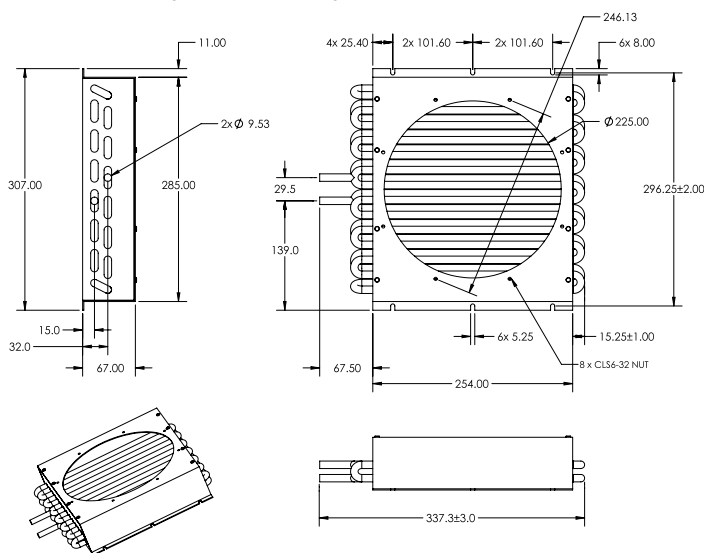


**ATS-HE25 SERIES**

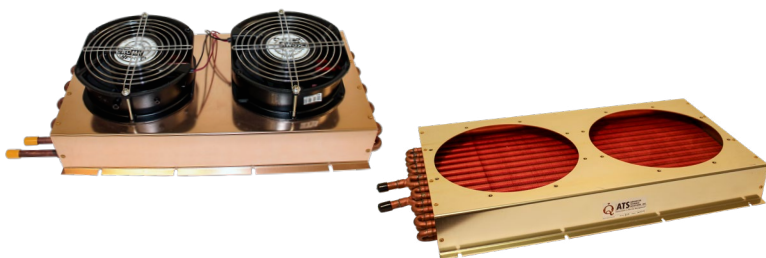


MPN	FAN TYPE	# OF FANS	FAN SIZE (inches)
ATS-HE25-C1-R0	NO FAN	0	N/A
ATS-HE25-C2-R0	12V	2	10.0 Round
ATS-HE25-C3-R0	12V PWM	2	10.0 Round
ATS-HE25-C4-R0	24V	2	10.0 Round
ATS-HE25-C5-R0	24V PWM	2	10.0 Round
ATS-HE25-C6-R0	48V	2	10.0 Round
ATS-HE25-C7-R0	48V PWM	2	10.0 Round

- » Heat transfer capacity up to 177W per  $\Delta T = 1^{\circ}\text{C}$
- » 21.58 (L) x 12.0 (W) x 2.12 (H)" core size
- »  $\Delta T$  = inlet liquid temperature - inlet air temperature
- » Weight: 7422g (16.4 lbs); Weight w/fan: 11012g (24.23 lbs)
- » Maximum pressure: 100 psi

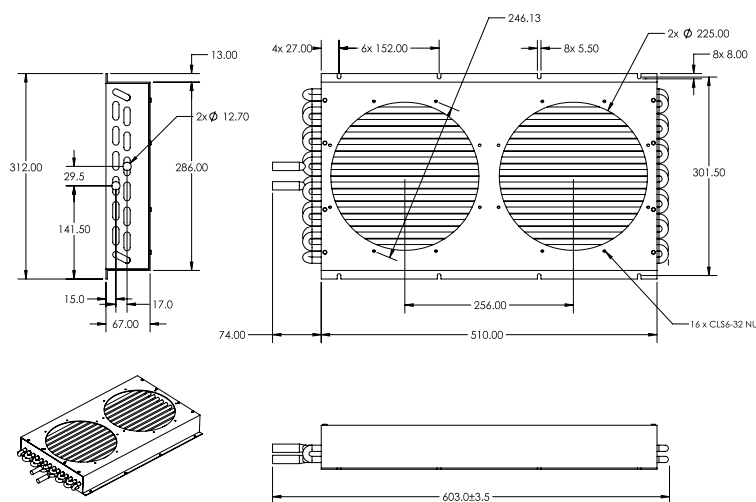




**ATS-HE26 SERIES**

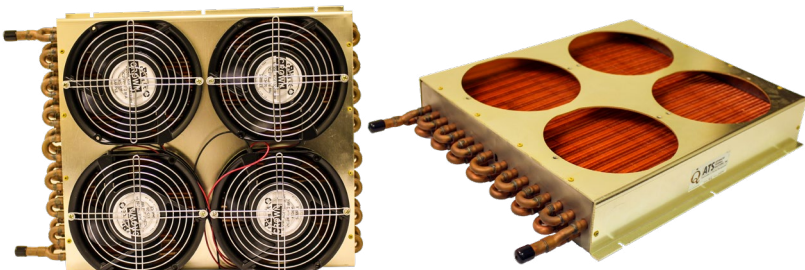

- » Heat transfer capacity up to 250W per  $\Delta T = 1^{\circ}\text{C}$
- » 17.52 (L) x 14.0 (W) x 2.63 (H)" core size
- »  $\Delta T$  = inlet liquid temperature - inlet air temperature
- » Weight: 4018g (8.9 lbs); Weight w/fan: 5791g (12.8 lbs)
- » Maximum pressure: 100 psi

MPN	FAN TYPE	# OF FANS	FAN SIZE (inches)
ATS-HE26-C1-R0	NO FAN	0	N/A
ATS-HE26-C2-R0	12V	4	6.75 Round
ATS-HE26-C3-R0	12V PWM	4	6.75 Round
ATS-HE26-C4-R0	24V	4	6.75 Round
ATS-HE26-C5-R0	24V PWM	4	6.75 Round
ATS-HE26-C6-R0	48V	4	6.75 Round
ATS-HE26-C7-R0	48V PWM	4	6.75 Round

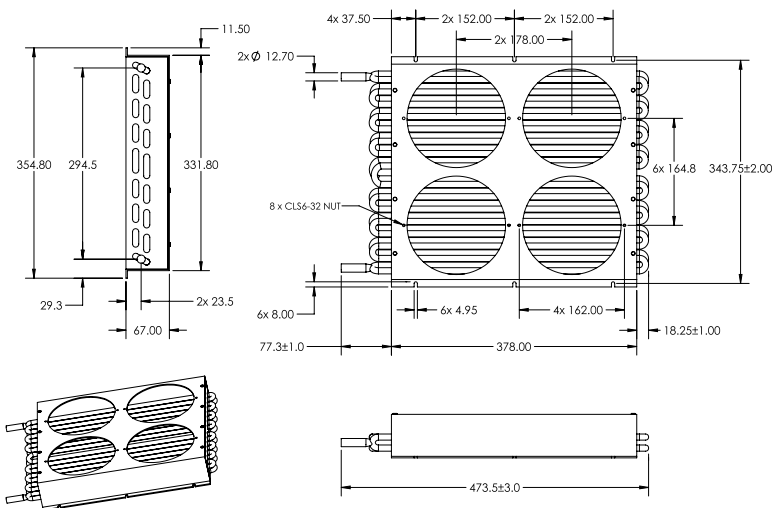


**ADDITIONAL COMPONENTS DEPLOYED IN LIQUID COOLING LOOPS**



**Flow Meter**



**Leak Detector**



**Cold Plates**



**Chillers**




**Heat Exchangers**

ATS has the products needed to design a complete liquid cooling loop: **Cold Plates** to transfer and remove the heat from the source, **Heat Exchangers** to transfer heat from the liquid to the air with or without a fan, and **Chillers** to circulate and condition the fluid in the system. In addition, ATS offers **Flow Meters** to instantaneously measure the volumetric flow rate of the fluid in the system and **Leak Detectors** to notify users of any leaks in the system.




# Heat Exchangers (cont'd)

**Air Flow Through Heat Exchanger (CMH)**

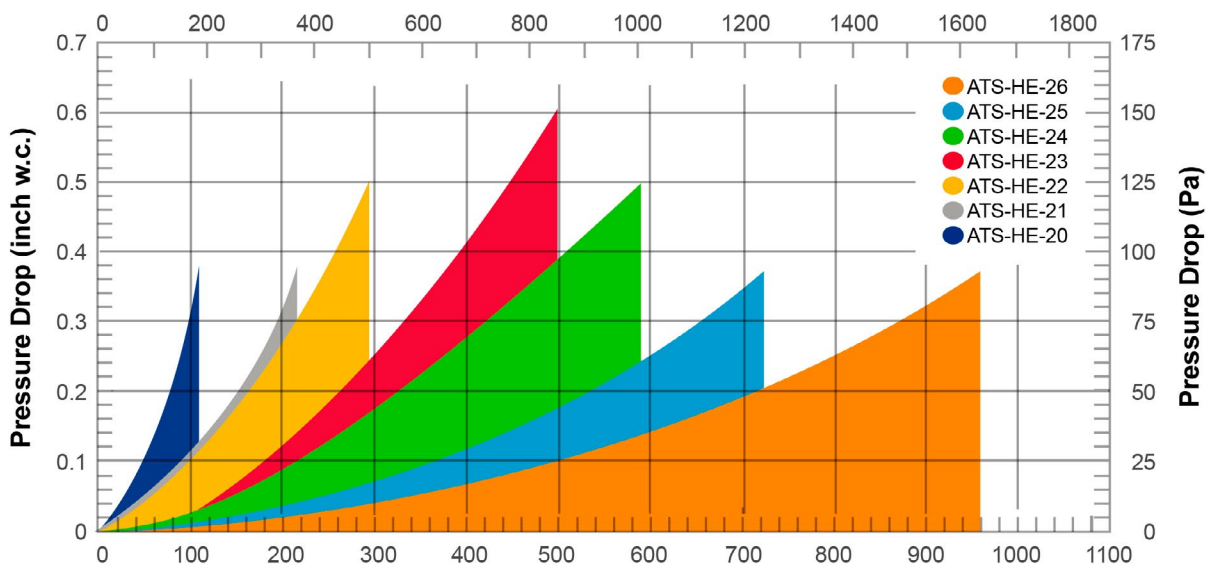


**Air Flow Through Heat Exchanger (CFM)**

**Pressure Drop vs Water Flow**  
Water Flow Through Heat Exchanger (LPM)

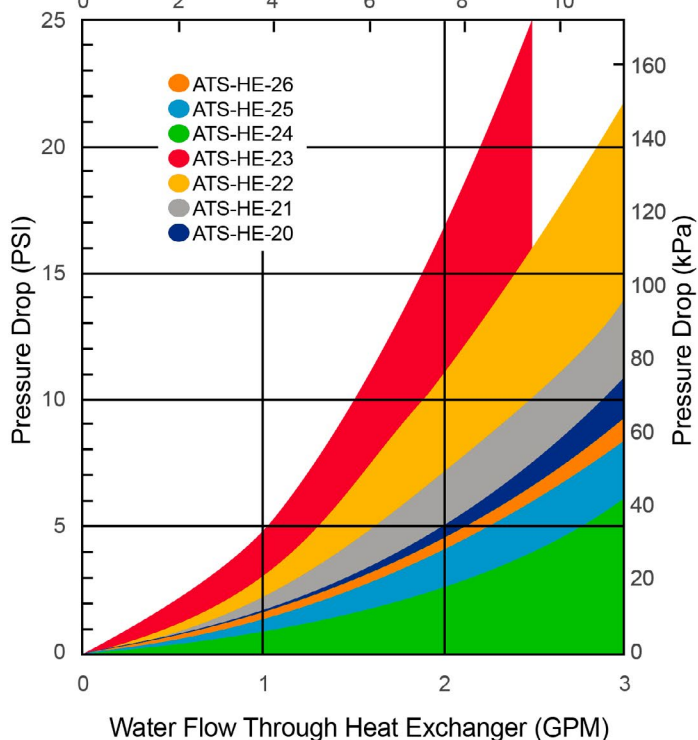

**ATS Heat Exchanger Family Performance**  
Water & Air (Standard Fans)

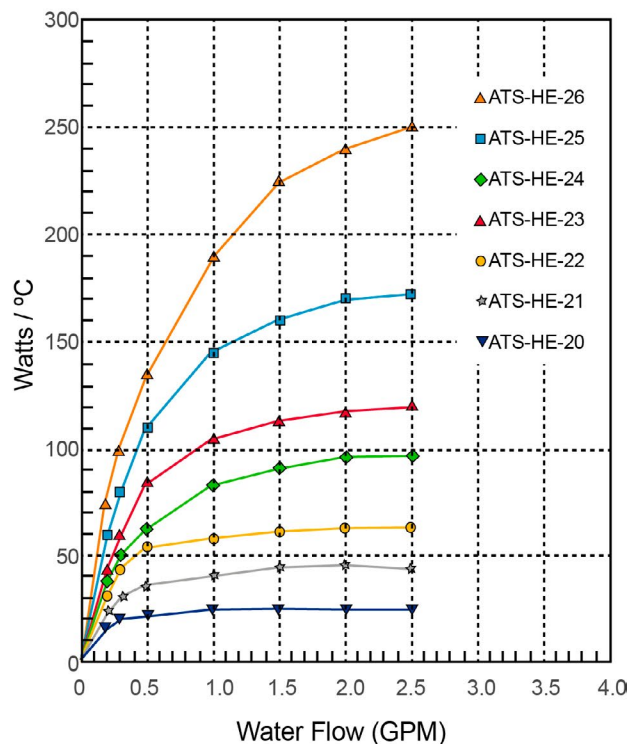

Note: Performance curves are per  $\Delta T = 1^\circ C$  |  $\Delta T = \text{inlet liquid temperature} - \text{inlet air temperature}$

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Advanced Thermal Solutions:

[ATS-HE26-C2-R0](#) [ATS-HE-26](#) [ATS-HE20-C1-R0](#) [ATS-HE20-C2-R0](#) [ATS-HE20-C3-R0](#) [ATS-HE20-C4-R0](#) [ATS-HE20-C5-R0](#) [ATS-HE26-C7-R0](#) [ATS-HE25-C7-R0](#) [ATS-HE26-C1-R0](#) [ATS-HE26-C3-R0](#) [ATS-HE26-C4-R0](#) [ATS-HE26-C5-R0](#) [ATS-HE26-C6-R0](#) [ATS-HE25-C1-R0](#) [ATS-HE25-C2-R0](#) [ATS-HE25-C3-R0](#) [ATS-HE25-C4-R0](#) [ATS-HE25-C5-R0](#) [ATS-HE25-C6-R0](#) [ATS-HE24-C2-R0](#) [ATS-HE24-C3-R0](#) [ATS-HE24-C4-R0](#) [ATS-HE24-C5-R0](#) [ATS-HE24-C6-R0](#) [ATS-HE24-C7-R0](#) [ATS-HE23-C3-R0](#) [ATS-HE23-C4-R0](#) [ATS-HE23-C5-R0](#) [ATS-HE23-C6-R0](#) [ATS-HE23-C7-R0](#) [ATS-HE24-C1-R0](#) [ATS-HE22-C4-R0](#) [ATS-HE22-C5-R0](#) [ATS-HE22-C6-R0](#) [ATS-HE22-C7-R0](#) [ATS-HE23-C1-R0](#) [ATS-HE23-C2-R0](#) [ATS-HE21-C5-R0](#) [ATS-HE21-C6-R0](#) [ATS-HE21-C7-R0](#) [ATS-HE22-C1-R0](#) [ATS-HE22-C2-R0](#) [ATS-HE22-C3-R0](#) [ATS-HE20-C6-R0](#) [ATS-HE20-C7-R0](#) [ATS-HE21-C1-R0](#) [ATS-HE21-C2-R0](#) [ATS-HE21-C3-R0](#) [ATS-HE21-C4-R0](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)