Surface mount type

TPF Series

Update

RoHS compliance, Halogen free
Ultra low ESR: 5mΩ~15mΩ
Large capacitance: 1,000μF

Specifications

Items	Condition		Specifications				
Rated voltage (V)	–		2.0	2.5	4.0	6.3	10
Surge voltage (V)	–		2.3	2.9	4.6	7.2	12
Category temperature range (℃)	–		−55 to +105				
Capacitance tolerance (%)	120Hz/20℃		M : ±20				
Rated capacitance range (μF)	120Hz/20℃		150 to 1000				
Dissipation Factor (DF)	120Hz/20℃		Please see the attached characteristics list				
Leakage current	Rated voltage applied, after 5 minutes		Please see the attached characteristics list				
Equivalent series resistance (ESR)	100kHz/20℃		Please see the attached characteristics list				
Characteristics of impedance ratio at high temp. and low temp.	100kHz/+20℃	−55℃ Z/Z20℃	0.6 to 2.0				
		+105℃ Z/Z20℃	0.6 to 2.0				
Endurance	105℃, 2,000h, rated voltage applied	ΔC/C	Within±20% of the initial value				
		DF	≤ 1.5 times of the initial limit				
		LC	Within the initial limit				
Damp heat (Steady State)	60℃, 90 to 95%RH, 500h, No-applied voltage	ΔC/C	Within+50%,−20% of the initial value(2TPF220M6,2TPF330M6,ETPF1000M6H (5H))				
			Within+40%, −20% of the initial value (Except for the above model)				
		DF	≤ 1.5 times of the initial limit				
		LC	≤ 3 times of the initial limit				
Surge	105℃, 1,000 cycles, 1kΩ discharge resistance, surge voltage applied	ΔC/C	Within±5% of the initial value				
		DF	Within the initial limit				
		LC	≤ 3 times of the initial limit				

Marking and dimensions

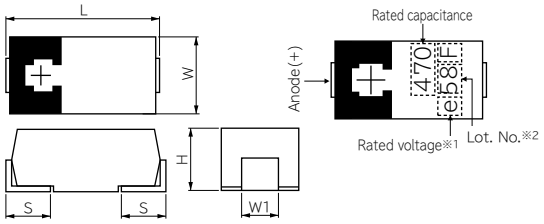

※1 The rated voltage is as follows.

R.V.	2.0	2.5	4.0	6.3	10
Mark	d	e	g	j	A

※2 Lot.No.shows roughly manufacturing date.

(unit : mm)

Size code	L ±0.3	W ±0.2	H ±0.2※1	S ±0.2	W1 ±0.1
D2E	7.3	4.3	1.8	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4
D4	7.3	4.3	3.8	1.3	2.4

※1 ±0.1:D2E

Recommended land pattern dimension of PWB



(unit : mm)

Size code	a	b	c
D2E	2.4	2.9	3.7
D3L	2.4	2.9	3.7
D4	2.4	2.9	3.7

Size list

RV:Rated voltage

μF \ RV	2.0	2.5	4.0	6.3	10.0
150					D3L
220	D2E			D3L	
330	D2E	D3L	D3L	D3L	
470		D4,D3L	D3L	D4	
680		D4,D3L	D4		
1,000		D4			

TPF series characteristics list

Size code	Part number	Rated voltage (V)	Rated temperature (℃)	Rated capacitance (μF)	Category voltage (V)	Category temperature (℃)	DF (% max)	LC (μA) max/5min.	ESR (mΩmax) 100kHz/20℃	Maximum allowable ripple current (mArms) 100kHz※1	MSL Reflow temp. ≤ 260℃	MSL Reflow temp. ≤ 250℃
D2E	2TPF330M6	2.0	105	330	2.0	105	10	132.0	6	4700	—	2a
	2TPF220M6	2.0	105	220	2.0	105	10	88.0	6	4700	—	2a
D3L	10TPF150ML	10	105	150	10	105	10	150.0	15	3600	—	2a
	6TPF330M9L	6.3	105	330	6.3	105	10	207.9	9	3900	3	2a
	6TPF330M5EL※2	6.3	105	330	6.3	105	10	207.9	5/500kHz	6200	3	2a
	6TPF220ML	6.3	105	220	6.3	105	10	138.6	12	4000	3	2a
	6TPF220M9L	6.3	105	220	6.3	105	10	138.6	9	4600	3	2a
	6TPF220M5L	6.3	105	220	6.3	105	10	138.6	5	6100	3	2a
	4TPF470ML	4.0	105	470	4.0	105	10	188.0	10	4400	3	2a
	4TPF470M5EL※2	4.0	105	470	4.0	105	10	188.0	5/500kHz	6200	3	2a
	4TPF330ML	4.0	105	330	4.0	105	10	132.0	12	4000	3	2a
	2R5TPF680ML	2.5	105	680	2.5	105	10	170.0	10	4400	3	2a
	2R5TPF680M7L	2.5	105	680	2.5	105	10	170.0	7	4400	3	2a
	2R5TPF680M6L	2.5	105	680	2.5	105	10	170.0	6	4400	3	2a
	2R5TPF470ML	2.5	105	470	2.5	105	10	117.5	10	4400	3	2a
	2R5TPF470M7L	2.5	105	470	2.5	105	10	117.5	7	4400	3	2a
	2R5TPF470M6L	2.5	105	470	2.5	105	10	117.5	6	4400	3	2a
	2R5TPF330M7L	2.5	105	330	2.5	105	10	82.5	7	4400	3	2a
D4	6TPF470MAH	6.3	105	470	6.3	105	10	296.1	10	4400	3	2a
	4TPF680MAH	4.0	105	680	4.0	105	10	272.0	10	4400	3	2a
	ETPF1000M6H	2.5	105	1000	2.5	105	10	250.0	6	5600	3	2a
	ETPF1000M5H	2.5	105	1000	2.5	105	10	250.0	5	6100	3	2a
	ETPF680M5H	2.5	105	680	2.5	105	10	170.0	5	6100	3	2a
	ETPF470M5H	2.5	105	470	2.5	105	10	117.5	5	6100	3	2a

※1 100k to 500kHz,45℃ ※2 Under development

※ Red letters：New models

ООО «ЛайфЭлектроникс» “LifeElectronics” LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru