

SPECIFICATION CONTROL DRAWING

CTC-0062

TITLE TWO CONDUCTOR THERMOCOUPLE EXTENSION CABLE, SHIELDED, JACKETED

Date 11-26-07

Revision H


This specification sheet forms a part of the latest issue of Raychem Specification 55A.

COMPONENT WIRES -

- 1 of 55A8001-AWG (CHROMEL)
- 1 of 55A8000-AWG (ALUMEL)

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED ETFE

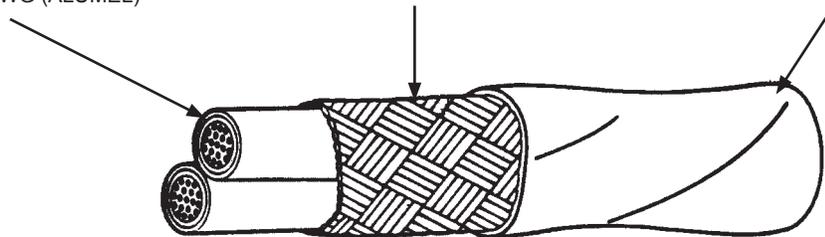

CABLE CONSTRUCTION DETAILS

PART NUMBER 1/	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
CTC-0062-26-*	26	38	.010	.012	.121	.127	11.0
CTC-0062-24-*	24	38	.010	.012	.131	.138	13.2
CTC-0062-22-*	22	38	.010	.012	.143	.150	16.4
CTC-0062-20-*	20	38	.010	.012	.159	.167	20.7
CTC-0062-18-*	18	38	.010	.012	.181	.190	27.4
CTC-0062-16-*	16	38	.010	.012	.197	.207	32.5

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 ACCELERATED AGING: 300 ± 3°C for 7 hours
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 FLAMMABILITY (Procedure 1): 3 seconds (maximum);
 3 in. (maximum); no flaming of facial tissue
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms)
 Impulse Dielectric Test, 6.0 kV (peak)
 LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours
 SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (Post Environmental):
 1000 volts (rms), 60 Hz, 1 minute

PRODUCT IDENTIFICATION: The cable jacket shall be marked in contrasting ink at 6 inch (nominal) intervals between marks as follows:
 " CTC-0062-AWG-06090 "

PART NUMBER:
 The "*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color. The color of the CHROMEL shall be shown first.

- 1/ Example: AWG 20,
 Per MIL-STD-687: white and green; white jacket:
 CTC-0062-20-9/5-9
 Per ANSI MC96.1: yellow and red; yellow jacket:
 CTC-0062-20-4/2-4
 Per British Standard Code BS:
 brown and blue; red jacket:
 CTC-0062-20-1/6-2
 Per International Standard IEC 584-3:
 green and white; green jacket:
 CTC-0062-20-5/9-5

The combination of the above thermoelements is referred to as Type KX per ANSI MC96.1.

EMF shall be 4.00 mV (minimum), 4.19 mV (maximum), at 100°C with reference junction corrected to 0°C per ANSI MC96.1, and shall be performed on every length of finished cable.

CHROMEL and ALUMEL are federally registered trademarks of Hoskins Manufacturing Company. Alternative conductors, exhibiting the same performance characteristics, may be substituted for one or both of the CHROMEL and ALUMEL conductors.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.
 Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx"). OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Page 1 of 1	The TE logo, Tyco Electronics, Raychem, Alumel and Chromel are trademarks.		Raychem Wire & Cable 501 Oakeside Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax: 1-650-361-6297
	DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL		
	THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.		

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru