

## Insulated Precision Wirewound Resistors Axial Leads



In wirewound precision resistors, the RLP series holds a leading position in professional applications whenever an excellent stability of the ohmic value and a correspondingly low temperature coefficient are required at the same time.

The RLP model resistors comply with the most stringent requirements of the EN 140-100 specification. The series consists of 5 models covering the power range from 1 W to 10 W.

Non-inductive versions can be supplied on request by specifying RLP-NI. For higher power dissipations, the use of RH series resistors is recommended.


### FEATURES

- 1 W to 10 W at 25 °C
- CECC 40201-006
- Conforms to EN 140-100
- Excellent stability <math>\pm 0.3\%</math> after 1000 h
- High power up to 10 W at 25 °C
- Low ohmic values 10 m $\Omega$  available
- Low temperature coefficient  $\leq \pm 50$  ppm/°C
- Electrical insulation
- Climatic protection
- Termination = Pure matte tin or Sn/Ag/Cu according to the ohmic value



**RoHS**  
COMPLIANT

### DIMENSIONS in millimeters

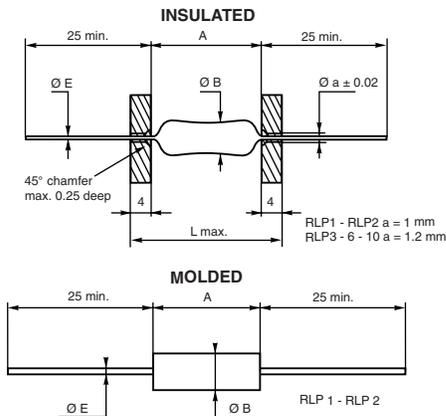

### DIMENSIONS in millimeters

| SERIES AND STYLE              | MOLDED                 |       | INSULATED |       |        |
|-------------------------------|------------------------|-------|-----------|-------|--------|
|                               | RLP 1                  | RLP 2 | RLP 3     | RLP 6 | RLP 10 |
| <b>A max.</b>                 | 7                      | 10.2  | 14        | 23.82 | 46.78  |
| <b>Ø B max.</b>               | R > 0.15 $\Omega$      | 2.5   | 4.0       | 5.54  | 8.71   |
|                               | R $\leq$ 0.15 $\Omega$ | -     | 6         | 9     | 11     |
| <b>E <math>\pm</math> 0.1</b> | 0.6                    | 0.6   | 0.8       | 0.8   | 0.8    |
| <b>Weight in g</b>            | 0.27                   | 0.48  | 1.3       | 3.4   | 8.6    |

### TECHNICAL SPECIFICATIONS

| VISHAY SFERNICE SERIES AND STYLE            |                                   | RLP1 $\text{€}$                 | RLP2 $\text{€}$                  | RLP3 $\text{€}$                  | RLP6                            | RLP10                           |
|---|-----------------------------------|---------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|
| NF C 83-210                                 |                                   | RP8                             | RP7                              | RP4                              | -                               | -                               |
| CECC 40201-006                              |                                   | A                               | B                                | C                                | -                               | -                               |
| <b>Power Rating at + 25 °C</b>              | <b>VISHAY SFERNICE Limits</b>     | 1 W                             | 2 W                              | 3 W                              | 6 W                             | 10 W                            |
| <b>Ohmic Range in Relation to Tolerance</b> | <b><math>\pm 5\%</math> E24</b>   | 0.05 $\Omega$<br>2 k $\Omega$   | 0.025 $\Omega$<br>6.8 k $\Omega$ | 0.01 $\Omega$<br>15 k $\Omega$   | 0.02 $\Omega$<br>59 k $\Omega$  | 0.06 $\Omega$<br>150 k $\Omega$ |
|   | <b><math>\pm 2\%</math> E48</b>   | 0.05 $\Omega$<br>2 k $\Omega$   | 0.025 $\Omega$<br>6.8 k $\Omega$ | 0.03 $\Omega$<br>15 k $\Omega$   | 0.02 $\Omega$<br>59 k $\Omega$  | 0.06 $\Omega$<br>150 k $\Omega$ |
|   | <b><math>\pm 1\%</math> E96</b>   | 0.05 $\Omega$<br>2 k $\Omega$   | 0.025 $\Omega$<br>6.8 k $\Omega$ | 0.03 $\Omega$<br>15 k $\Omega$   | 0.02 $\Omega$<br>59 k $\Omega$  | 0.06 $\Omega$<br>150 k $\Omega$ |
|   | <b><math>\pm 0.5\%</math> E96</b> | 0.4 $\Omega$<br>2 k $\Omega$    | 0.4 $\Omega$<br>6.8 k $\Omega$   | 0.0499 $\Omega$<br>15 k $\Omega$ | 0.3 $\Omega$<br>59 k $\Omega$   | 0.3 $\Omega$<br>150 k $\Omega$  |
|   | <b><math>\pm 0.1\%</math> E96</b> | Please consult VISHAY SFERNICE  |                                  |                                  |                                 |                                 |
| <b>Qualified Ohmic Range NF C 83-210</b>    | 1 $\Omega$<br>470 $\Omega$        | 0.2 $\Omega$<br>1.78 k $\Omega$ | 0.1 $\Omega$<br>3.57 k $\Omega$  | 0.1 $\Omega$<br>12.1 k $\Omega$  | 0.1 $\Omega$<br>40.2 k $\Omega$ |                                 |
| <b>Limiting Element Voltage</b>             | 50 V                              | 120 V                           | 200 V                            | 300 V                            | 720 V                           |                                 |
| <b>Critical Resistance</b>                  | out of nominal ohmic range        |                                 |                                  | 17 800 $\Omega$                  | 51 100 $\Omega$                 |                                 |

Undergoes European Quality Insurance System (CECC)



Insulated Precision Wirewound Resistors  
Axial Leads

Vishay Sfernice

| PERFORMANCE             |  |   |  |   |
|-------------------------|--|---|--|---|
| TESTS                   | CONDITIONS   | REQUIREMENTS  |  | TYPICAL VALUES AND DRIFTS   |
|                         |  | MIL-R-26 E  | CECC40201-06   |   |
| Dielectric w/s Voltage  | 500 VRMS for RLP 1-2-3<br>1000 VRMS for RLP 6-10       | $\pm (0.1 \% + 0.05 \Omega)$  | -  | $\pm (0.05 \% + 0.05 \Omega)$   |
| Short Time Overload     | 5 Pn/5 s for Pn < 5 W<br>10 Pn/5 s for Pn $\geq$ 5 W   | $\pm (0.2 \% + 0.05 \Omega)$  | $\pm 0.25 \% + 0.05 \Omega$                                    | $\pm (0.1 \% + 0.05 \Omega)$  |
| Climatic Sequence       | EN 140-201<br>fasc. 19A - 55 °C/+ 200 °C<br>5 cycles   | -   | $\pm 0.5 \% + 0.05 \Omega$<br>Insulation R > 100 M $\Omega$    | $\pm (0.2 \% + 0.05 \Omega)$<br>Ins. resistance > 10 <sup>3</sup> M $\Omega$  |
| Humidity (Steady State) | EN 140-201<br>fasc. 3A 56 days 95 % R.H.               | -   | $\pm 0.5 \% + 0.05 \Omega$<br>Insulation R > 100 M $\Omega$    | $\pm (0.25 \% + 0.05 \Omega)$<br>Ins. resistance > 10 <sup>3</sup> M $\Omega$ |
| Vibration               | MIL-STD-202<br>Method 204 - Test D: 20 g<br>10/2000 Hz | $\pm (0.1 \% + 0.05 \Omega)$  | $\pm 0.25 \% + 0.05 \Omega$                                    | $\pm (0.05 \% + 0.05 \Omega)$   |
| Load Life               | MIL-STD-202<br>Method 108 Pn 1000 h                    | $\pm (0.5 \% + 0.05 \Omega)$  | $\pm 0.5 \% + 0.05 \Omega$<br>Insulation R $\geq$ 1 G $\Omega$ | $\pm (0.3 \% + 0.05 \Omega)$  |
| Moisture Resistance     | MIL-STD-202<br>Method 106                              | $\pm (0.2 \% + 0.05 \Omega)$<br>Insulation resistance<br>> 100 M $\Omega$ | -  | $\pm (1 \% + 0.05 \Omega)$<br>Ins. resistance > 10 <sup>3</sup> M $\Omega$    |
| High Temperature        | 250 h at + 275 °C                                      | $\pm (0.5 \% + 0.05 \Omega)$  | $\pm 0.5 \% + 0.05 \Omega$<br>Insulation R $\geq$ 1 G $\Omega$ | $\pm (0.25 \% + 0.05 \Omega)$   |
| Shock                   | MIL-STD-202<br>100 g Method 205 - Test C               | $\pm (0.1\% + 0.05 \Omega)$   | $\pm 0.25 \% + 0.05 \Omega$                                    | $\pm (0.05 \% + 0.05 \Omega)$   |


| TEMPERATURE COEFFICIENT IN THE RANGE - 55 °C TO + 200 °C |                                      |                                     |                                     |
|--|--------------------------------------|-------------------------------------|-------------------------------------|
| OHMIC RANGE  | LIMITS                               |                                     | TYPICAL VALUE                       |
|  | NF C                                 | MIL                                 |                                     |
| < 1 $\Omega$   | $\pm 100 \text{ ppm}/^\circ\text{C}$ | $\pm 90 \text{ ppm}/^\circ\text{C}$ | $\pm 50 \text{ ppm}/^\circ\text{C}$ |
| 1 $\Omega$ to < 10 $\Omega$                              | $\pm 50 \text{ ppm}/^\circ\text{C}$  | $\pm 50 \text{ ppm}/^\circ\text{C}$ |                                     |
| $\geq 10 \Omega$   | $\pm 25 \text{ ppm}/^\circ\text{C}$  | $\pm 30 \text{ ppm}/^\circ\text{C}$ | + 0 to - 20 ppm/°C                  |

**STABILITY AND POWER RATING**


Stability changes slightly according to power rating and ambient temperature. This fact is especially important for users needing a life drift lower than the initial resistance tolerance. Typical drifts, after 2000 hours life test made under the 90°/30' conditions and at an ambient temperature of 25 °C, are:

| OHMIC RANGE | RLP1  | RLP2 | RLP3  | RLP6  | RLP10 | $\frac{\Delta R \%}{R \%}$ |
|-------------|-------|------|-------|-------|-------|----------------------------|
| Pn          | 1 W   | 2 W  | 3 W   | 5 W   | 10 W  | 0.3                        |
| 0.5 Pn      | 0.5 W | 1 W  | 1.5 W | 2.5 W | 5 W   | 0.15                       |


**INDUCTANCE (Example)**

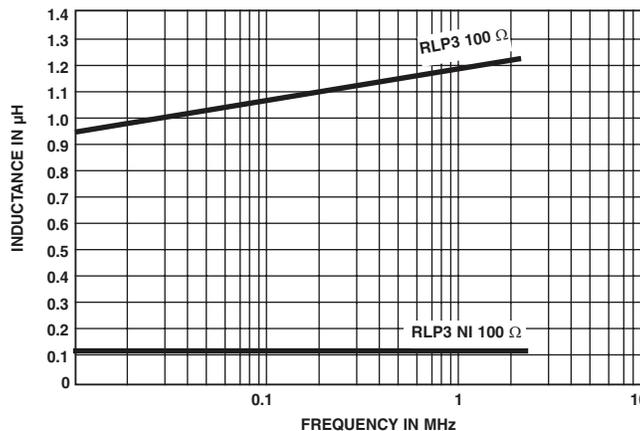

**POWER RATING CHART**

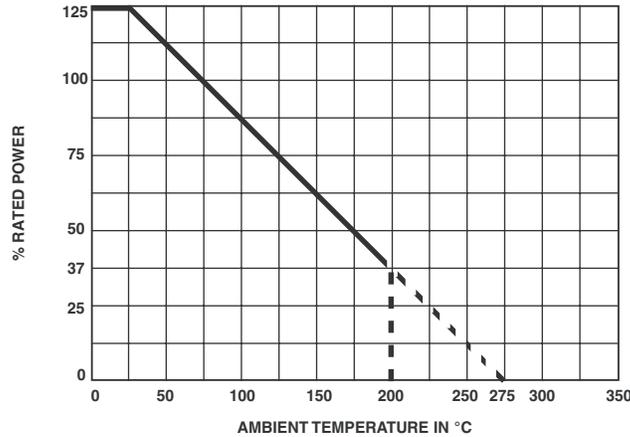

**TEMPERATURE RISE**

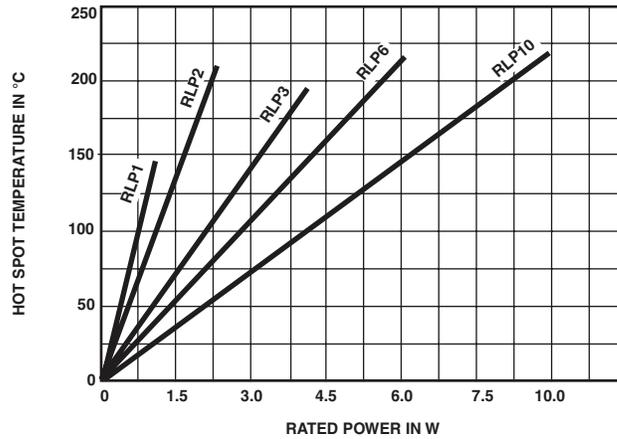

**MARKING**

SFERNICE trademark, series, style, CECC style (if applicable) nominal resistance (in Ω, kΩ), tolerance (in %), manufacturing date.

| ORDERING INFORMATION |       |                       |                    |   |           |           |                                   |
|----------------------|-------|-----------------------|--------------------|---|-----------|-----------|-----------------------------------|
| RLP                  | 1     |                       | XXX                | 5U5   | ± 5 %     | TR100     | e1 (e3: RLP1 < 1R<br>RLP2 < 3R52) |
| MODEL                | STYLE | NON INDUCTIVE WINDING | SPECIAL DESIGN     | OHMIC VALUE   | TOLERANCE | PACKAGING | LEAD (Pb)-FREE                    |
|                      |       | Optional (NI)         | Method N° Optional | Custom items are subject to extra-charge and min. order. Please see price list. |           | Optional  |                                   |

| SAP PART NUMBERING GUIDELINES |       |             |           |           |
|-------------------------------|-------|-------------|-----------|-----------|
| RLP                           | 01    | 5R500       | J         | R15       |
| MODEL                         | STYLE | OHMIC VALUE | TOLERANCE | PACKAGING |



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)