

SHELL		A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	F	G
09	P	30.81	24.99	16.96	16.79	10.96	8.35±0.12	5.90±0.15
	S	30.81	24.99	16.96	16.21	10.96	7.89±0.13	6.17±0.12
15	P	39.14	33.32	25.18	25.12	19.18	8.35±0.12	5.90±0.15
	S	39.14	33.32	25.18	24.54	19.18	7.89±0.13	6.17±0.12
25	P	53.03	47.04	39.12	38.84	33.12	8.35±0.12	5.70±0.25
	S	53.03	47.04	39.12	38.25	33.12	7.89±0.13	6.17±0.12
37	P	69.32	63.50	55.68	55.30	49.68	8.35±0.12	5.70±0.25
	S	69.32	63.50	55.68	54.71	49.68	7.89±0.13	6.17±0.12

SERIES		LD 09 S 13A 4 GX 00 LF	LEAD FREE	
NO: OF CONTACTS		09,15,25,37	STANDARD VERSION	
CONTACTS		P - PIN S - SOCKET	MOUNTING ACCESSORY	
TERMINATION TYPE		13A-RIGHT ANGLED(EUROPE VERSION) FOOTPRINT-10.4mm & PITCH-2.54mm	MATING CYCLES	
			*FOR LD SERIES, REFER TECHNICAL SPECIFICATION	
			GX-HARPOONS+INSERT UNC 4-40+ELEC.CONTINUITY GL-HARPOONS+INSERT M3+ELEC.CONTINUITY GV-HARPOONS+FEMALE SCREW UNC 4-40+ELEC.CONTINUITY GI-HARPOONS+FEMALE SCREW M3+ELEC.CONTINUITY	

ORDERING INFORMATION

NOTES:

- 1) INSIDE DIMENSIONS FOR THE MALE CONNECTOR AND OUTSIDE DIMENSIONS FOR THE FEMALE CONNECTOR
- 2) DIMPLE IS PROVIDED ONLY FOR THE MALE CONNECTOR
- 3) THE GENERAL VIEW IS FOR THE OPTION GX/GL

mat'l. code				surface		tolerance		projection		product family			
-				ISO 1302		ISO 406 ISO 1101				D-SUB			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title			
A	-	AB	2014-08-01	angles	linear	.0±0.1		scale 2:1		DELTA-D R/A EUROPE LD SERIES			
B	ELX-I-19184	AB	2014-10-24			.00±0.1							
						.000±0.1							
				0°±2°									
				dr	ALIAS BABU	2014-08-01				dwg no		sheet 1 of 2	size
				enr	ALIAS BABU	2014-10-24				10130913		A3	
				chr	MITHUN PAUL	2014-10-24							
				appd	BIJU K PAUL	2014-10-24							
sheet index		revision	B	B						type Product Customer Drawing			
		sheet	1	2									
								</					

TECHNICAL SPECIFICATION

PHYSICAL CHARACTERISTICS

INSULATOR MATERIAL : BLACK THERMOPLASTIC UL94 V0
CONTACTS MATERIAL : COPPER ALLOY
CONTACTS PLATING : GOLD FLASH OVER NICKEL
SHELL PLATING : NICKEL/TIN

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE : 250V
RATED CURRENT : 5 A
CONTACT RESISTANCE : $\leq 25\text{m}\Omega$
INSULATION RESISTANCE : $\geq 5000\text{ M}\Omega$

MECHANICAL CHARACTERISTICS

MATING CYCLES : 50 MINIMUM
RETENTION AGAINST TORQUE : 0.5Nm


ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE : -55°C TO +105°C


PACKING SPECIFICATION

REFER GS-14-2405


MATING VIEW FOR FEMALE CONNECTOR

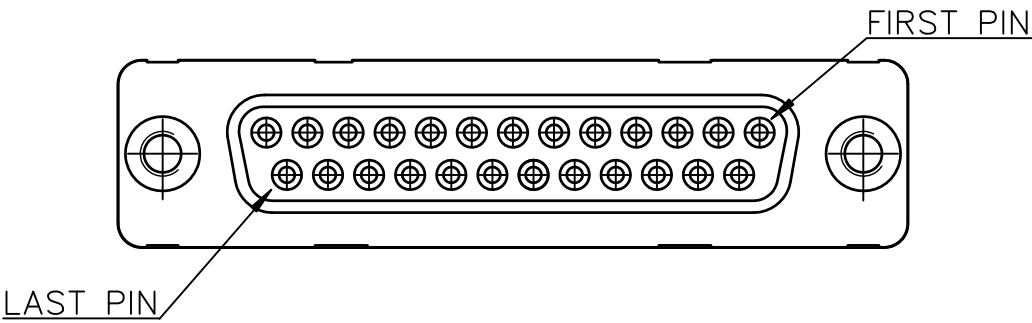


MATING VIEW FOR MALE CONNECTOR

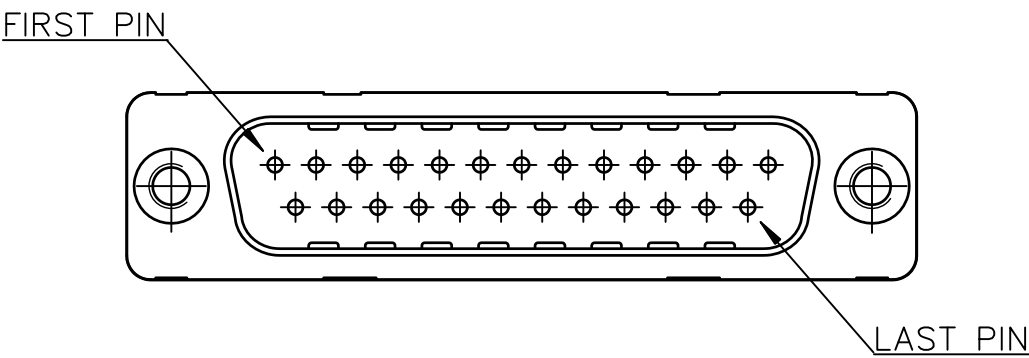

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

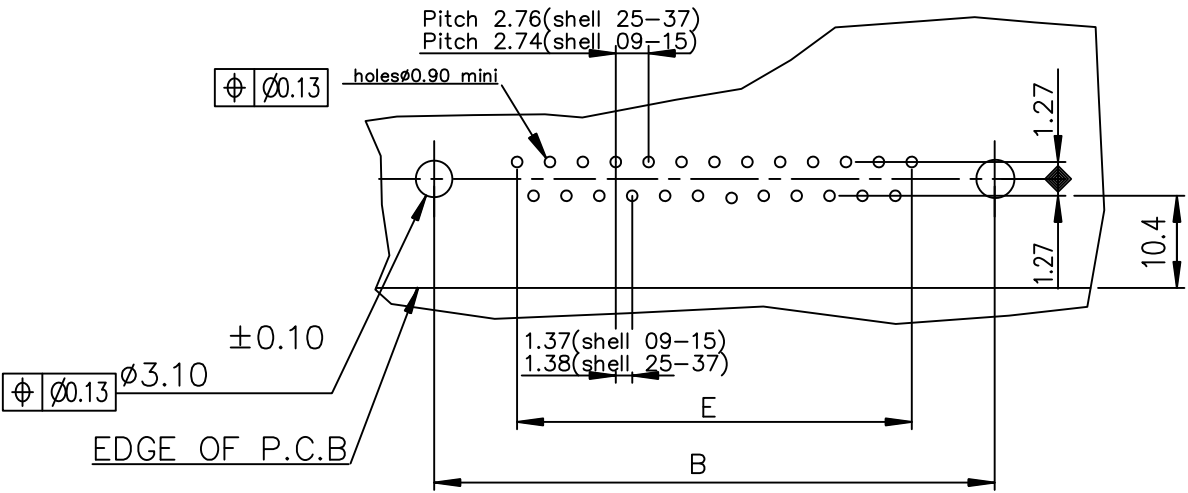

mat'l. code —				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family D—SUB											
ltr	ecn no	dr	date	tolerances unless otherwise specified								title DELTA—D R/A EUROPE LD SERIES									
B				angles	linear	.0±.0.1		scale 2:1													
						.00±0.1															
					0°±2°	.000±0.1															
				dr	ALIAS BABU		2014—08—01				dwg no				sheet 2 of 2				size		
				engr	ALIAS BABU		2014—10—24				10130913				A3						
				chr	MITHUN PAUL		2014—10—24														
				appd	BIJU K PAUL		2014—10—24														
sheet index		revision sheet																			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru