


100W, 2 x 4" AC-DC Power Supplies

Features

- ◆ 80W Convection, 100W with Forced Air
- ◆ Long e-cap lifetime
- ◆ Compact 2 x 4 inch footprint
- ◆ Medical approval with 2 x MoPP isolation
- ◆ Suitable for Class I and Class II installations
- ◆ Ceramic start-up cap

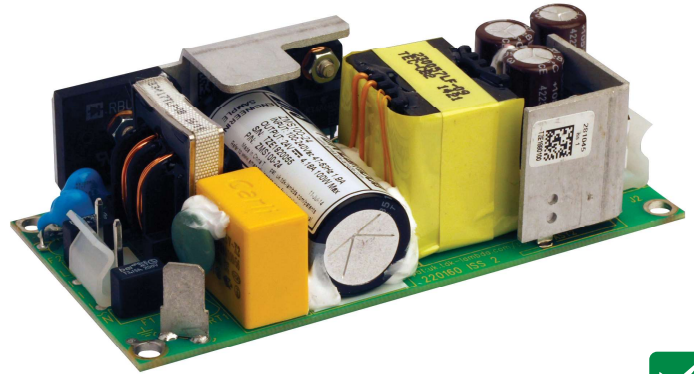

Key Market Segments & Applications



Specifications ⁽¹⁾

Model		ZMS100
AC Input Voltage range (2) (4)	-	85 - 264VAC (47-63Hz) 120 - 350VDC
Input Fusing	-	Line and neutral
Input Current (Typ) (230V/115VAC)	A	1.0 / 2.0
Inrush Current - cold start	A	<40 (max at 264Vac input)
Harmonic Compliance	-	Compliant to EN/IEC61000-3-2 class A Temperature Coefficient - <0.02% / °C
Typical Hold Up Time at 80W load,115/230VAC	ms	22 / 108
Typical Hold Up Time at 100W load,115/230VAC	ms	16 / 84 (see graphs for more detail)
Leakage Current	µA	<100µA at 100V 60Hz input, <250µA at 230V 50Hz
Touch Current (enclosure leakage)	µA	<100 µA
Cooling	-	80W with convection cooling, 100W max. with forced air cooling (see airflow rate graphs)
Efficiency	-	Up to 90% (see efficiency curves)
Operating Temperature	°C	-20°C to +70°C, derate linearly to 50% load from 50°C to 70°C
Storage Temperature	°C	-40°C to +85°C
Operational Altitude	-	5000m
Overcurrent Protection	-	hiccup (auto recovery)
Overvoltage Protection	-	Latching (unit shutdown, recycle mains to restart)
No Load Input Power at 230VAC	W	<0.5
Average Active Efficiency	%	>87
Humidity (non condensing)	RH	Operating and storage : 5 - 95% (non-condensing)
Withstand Voltage	-	Input to output 4kVac 2x MoPP, 1.5kVac input to ground 1x MoPP, 1.5kVac output to ground 1 x MoPP
Isolation Resistance	-	>100MΩ at 25°C & 70%RH
Isolation Class (3)	-	Construction suitable for Class II installations
Vibration	-	10 to 500Hz at 2G, EN60068-2-6 19,6m/s ² Constant, X, Y, Z 1 hour each.
Shock	-	30G EN60068-2-27, -47, MIL-STD-810E
Approvals	-	IEC/EN/UL/CSA 62368-1, 60950-1 and 60601-1, ANSI/AAMI ES 60601-1, CE Mark. Designed to meet IEC/EN/UL/CSA 61010-1:2010. ZMS100-12, 15 and 24 are type tested to EN 60335-1
Conducted & Radiated EMI	-	EN55011 / EN55022 level B conducted, level A radiated
Immunity (5)	-	EN 61000-4-2 (Level 3 criteria A) -3 (Level 3 criteria A) -4 (Level 3 criteria A), -5 (Level 3 criteria A), -6 (Level 3 criteria A), -8 (Level 3 criteria A), -11(class 3), -12(level 3) Meets the requirements of EN60601-1-2:2007 (as applicable to a component power supply)
Weight (Typ)	g	150
Size (W x L x H)	mm	50.8 x 101.6 x 31.9 (2" x 4" x 1.25")
Warranty	yrs	3
Connectivity	-	Molex as standard with separate ground faston Input Molex 10-63-4027, output Molex 09-65-2048

- Note: 1. Specification parameters apply at 25°C ambient temperature unless stated otherwise.
 2. For 12V & 15V unit derate from 100% at 100V to 90% at 90V and to 80% at 85V, for 24V, 36V, & 48V unit derate from 100% at 90V to 90% at 85V. (convection and forced air ratings) .
 3. ZMS100 uses Y1 capacitors to earth.
 4. Consult Sales Office for use under DC Input conditions
 5. Criteria B for dips and interruptions, contact technical support for full details.


Model Selector

Model	Nominal Output Voltage (V)	Output Adjust Range (V)	Maximum Current Convection (A)	Maximum Current Forced Air (A)	Maximum Output Power Convection (W)	Maximum Output power Forced Air (W)	Ripple (6) and noise (mv pk-pk)	Load Reg from 0 - full load (mv)	Line Reg from 85-264Vac (mv)
ZMS100-12	12	11.4 to 13.2	6.7	8.4	80.4	100.8	120	120	60
ZMS100-15	15	14.25 to 16.5	5.4	6.7	81.0	100.5	150	150	75
ZMS100-24	24	22.8 to 26.4	3.4	4.2	81.6	100.8	240	240	120
ZMS100-36	36	34.2 to 39.6	2.25	2.8	81.0	100.8	360	360	180
ZMS100-48	48	45.6 to 52.8	1.67	2.1	80.2	100.8	480	480	240


Note: 6. At 115VAC input 25°C

Outline Drawing

ZMS100 12 - 15V Series

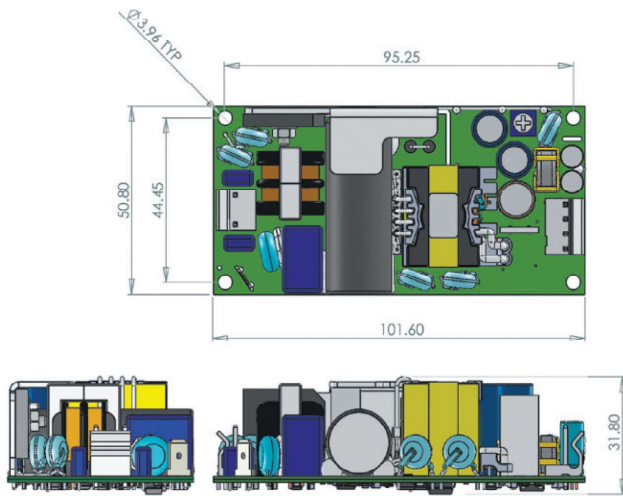

ZMS100 24 - 48V Series

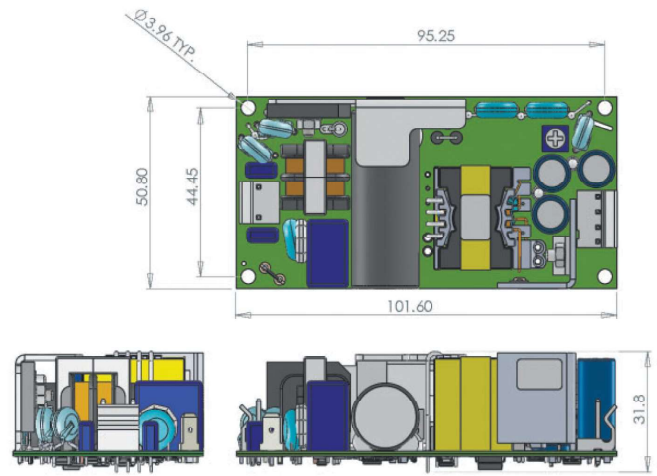

ZMS100 Series Pinout

J1	J2	J3
PIN Connection	PIN Connection	PIN Connection
1 Live	1 +VE	1 Earth
2 Not Connected	2 +VE	
3 Neutral	3 0V	
	4 0V	

ZMS100 Series Mating Parts

Connector	Housing	Crimp Pin	Manufacturer
J1	09-50-1031	08-70-1030	Molex
J2	09-50-1041	08-70-1030	Molex
J3	22-18AWG - 2-52047-2	-	Tyco
(Faston)	16-14AWG - 3-520408-2		

Other TDK-Lambda AC-DC Products

ZPSA20-60	20 to 60W single output
NV175	175W, 3x5", 1-5 outputs
ZWS	5 to 240W, single output
KPSA	5 to 15W, pcb mount
ZPD, ZPT	40W, 2x4" dual and triple outputs

For Additional Information, please visit
<https://product.tdk.com/en/power/>



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru