

# MMSD301T1G, SMMSD301T1G, MMSD701T1G, SMMSD701T1G,



**ON Semiconductor®**

<http://onsemi.com>

## SOD-123 Schottky Barrier Diodes

The MMSD301T1, and MMSD701T1 devices are spin-offs of our popular MMBD301LT1, and MMBD701LT1 SOT-23 devices. They are designed for high-efficiency UHF and VHF detector applications. Readily available to many other fast switching RF and digital applications.

### Features

- Extremely Low Minority Carrier Lifetime
- Very Low Capacitance
- Low Reverse Leakage
- AEC Qualified and PPAP Capable
- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant\*

### MAXIMUM RATINGS


Rating	Symbol	Value	Unit
Reverse Voltage MMSD301T1G, SMMSD301T1G MMSD701T1G, SMMSD701T1G	$V_R$	30 70	Vdc
Forward Current (DC) Continuous	$I_F$	200	mA
Forward Power Dissipation $T_A = 25^\circ\text{C}$	$P_F$	225	mW
Junction Temperature	$T_J$	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



**SOD-123  
CASE 425  
STYLE 1**



### MARKING DIAGRAM



- xx = Specific Device Code  
XT = MMSD301T1G  
SMMSD301T1G  
XH = MMSD701T1G  
SMMSD701T1G
- M = Date Code
- = Pb-Free Package

(Note: Microdot may be in either location)

### ORDERING INFORMATION

Device	Package	Shipping†
MMSD301T1G	SOD-123 (Pb-Free)	3,000 / Tape & Reel
SMMSD301T1G	SOD-123 (Pb-Free)	3,000 / Tape & Reel
MMSD701T1G	SOD-123 (Pb-Free)	3,000 / Tape & Reel
SMMSD701T1G	SOD-123 (Pb-Free)	3,000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MMSD301T1G, SMMSD301T1G, MMSD701T1G, SMMSD701T1G,

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Breakdown Voltage (I <sub>R</sub> = 10 μA) MMSD301T1G, SMMSD301T1G MMSD701T1G, SMMSD701T1G	V <sub>(BR)R</sub>	30 70	– –	– –	V
Diode Capacitance (V <sub>R</sub> = 0 V, f = 1.0 MHz) MMSD301T1G, SMMSD301T1G MMSD701T1G, SMMSD701T1G	C <sub>T</sub>	– –	0.9 0.5	1.5 1.0	pF
Total Capacitance (V <sub>R</sub> = 15 V, f = 1.0 MHz) MMSD301T1G, SMMSD301T1G (V <sub>R</sub> = 20 V, f = 1.0 MHz) MMSD701T1G, SMMSD701T1G	C <sub>T</sub>	– –	0.9 0.5	1.5 1.0	pF
Reverse Leakage (V <sub>R</sub> = 25 V) MMSD301T1G, SMMSD301T1G (V <sub>R</sub> = 35 V) MMSD701T1G, SMMSD701T1G	I <sub>R</sub>	– –	13 9.0	200 200	nAdc
Forward Voltage (I <sub>F</sub> = 1.0 mAdc) MMSD301T1G, SMMSD301T1G (I <sub>F</sub> = 10 mA) (I <sub>F</sub> = 1.0 mAdc) MMSD701T1G, SMMSD701T1G (I <sub>F</sub> = 10 mA)	V <sub>F</sub>	– – – –	0.38 0.52 0.42 0.7	0.45 0.6 0.5 1.0	Vdc

MMSD301T1G, SMMSD301T1G, MMSD701T1G, SMMSD701T1G,

TYPICAL CHARACTERISTICS  
MMSD301T1G, SMMSD301T1G

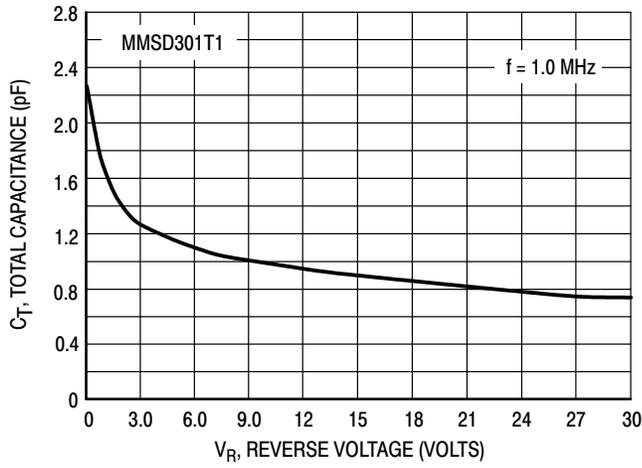


Figure 1. Total Capacitance

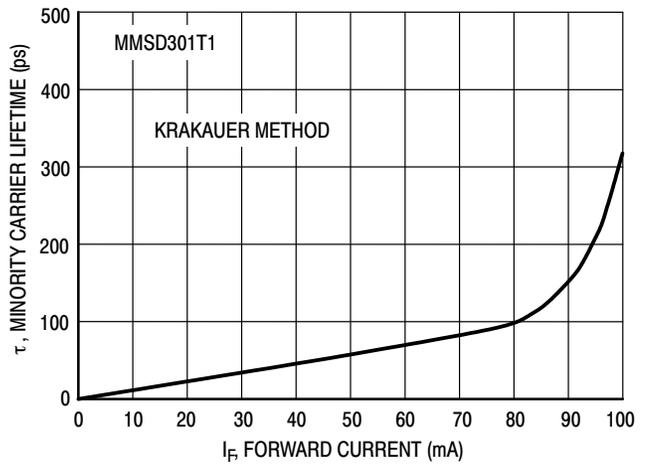


Figure 2. Minority Carrier Lifetime

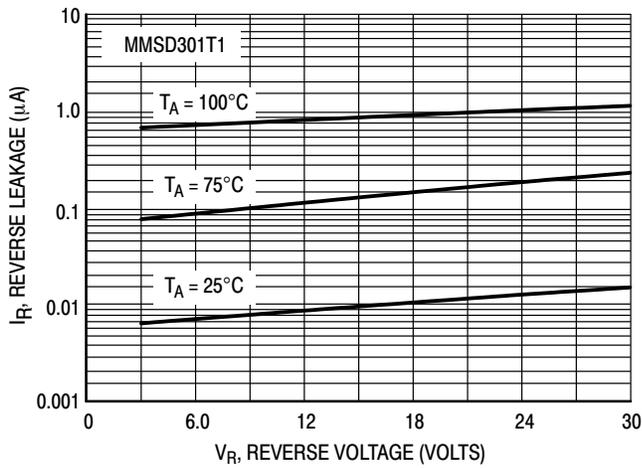


Figure 3. Reverse Leakage

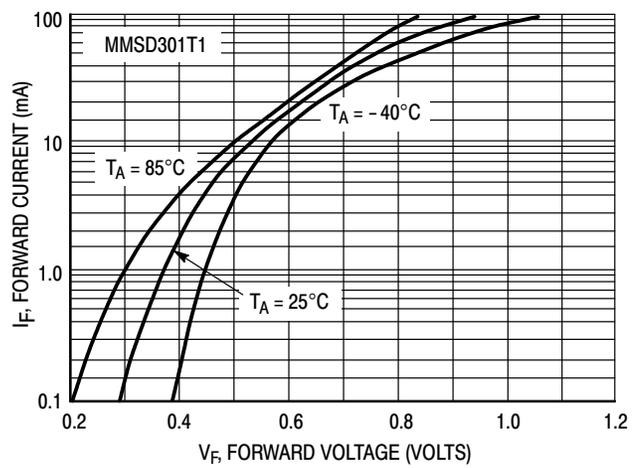


Figure 4. Forward Voltage

MMSD301T1G, SMMSD301T1G, MMSD701T1G, SMMSD701T1G,

TYPICAL CHARACTERISTICS  
MMSD701T1G, SMMSD701T1G

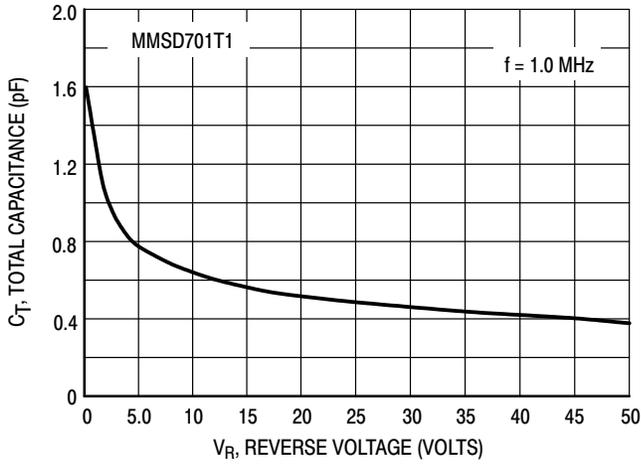


Figure 5. Total Capacitance

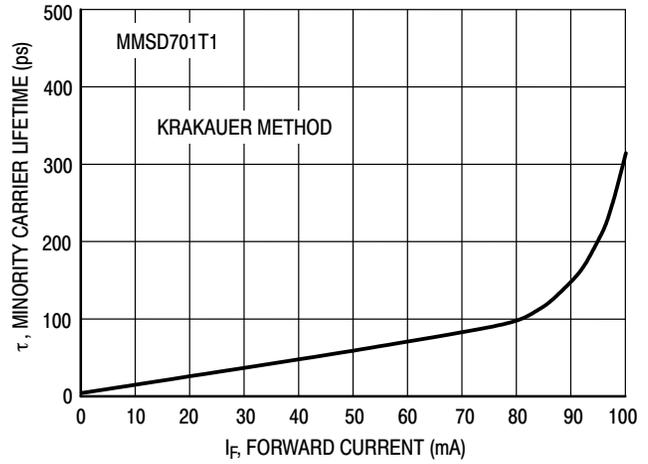


Figure 6. Minority Carrier Lifetime

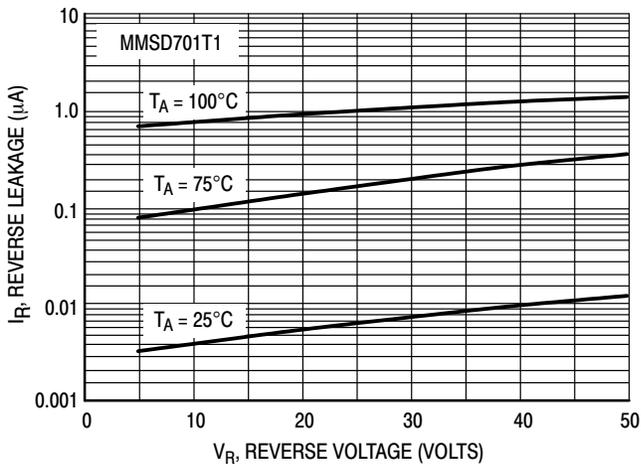


Figure 7. Reverse Leakage



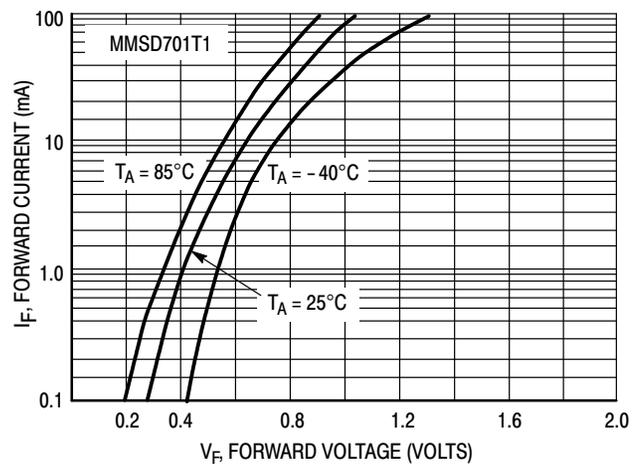


Figure 8. Forward Voltage

# MMSD301T1G, SMMSD301T1G, MMSD701T1G, SMMSD701T1G,

## PACKAGE DIMENSIONS

SOD-123  
CASE 425-04  
ISSUE G

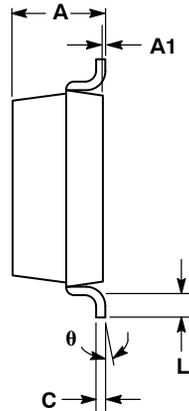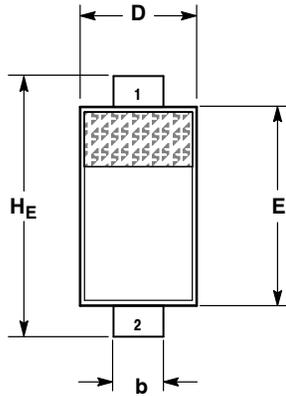


- NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.94	1.17	1.35	0.037	0.046	0.053
A1	0.00	0.05	0.10	0.000	0.002	0.004
b	0.51	0.61	0.71	0.020	0.024	0.028
c	---	---	0.15	---	---	0.006
D	1.40	1.60	1.80	0.055	0.063	0.071
E	2.54	2.69	2.84	0.100	0.106	0.112
HE	3.56	3.68	3.86	0.140	0.145	0.152
L	0.25	---	---	0.010	---	---
θ	0°	---	10°	0°	---	10°

- STYLE 1:  
PIN 1. CATHODE  
2. ANODE

## SOLDERING FOOTPRINT\*

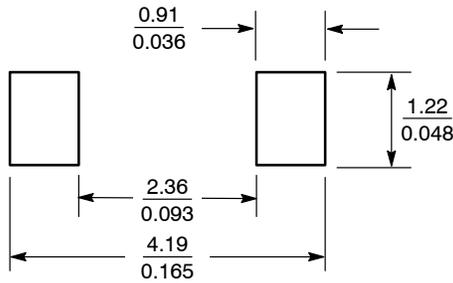

SCALE 10:1 ( $\frac{\text{mm}}{\text{inches}}$ )

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)