


### Features

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability

### Mechanical Data

- Case: DO-15, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.40 grams (approx.)
- Mounting Position: Any
- Marking: Type Number
- **Lead Free: For RoHS / Lead Free Version, Add “-LF” Suffix to Part Number, See Page 4**

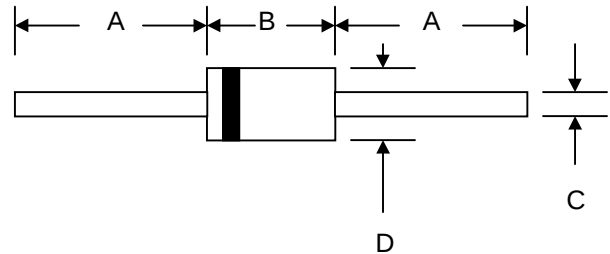

| DO-15                |      |       |
|----------------------|------|-------|
| Dim                  | Min  | Max   |
| A                    | 25.4 | —     |
| B                    | 5.50 | 7.62  |
| C                    | 0.71 | 0.864 |
| D                    | 2.60 | 3.60  |
| All Dimensions in mm |      |       |

### Maximum Ratings and Electrical Characteristics @T<sub>A</sub>=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

| Characteristic                                                                                                        | Symbol                                                 | FR151       | FR152 | FR153 | FR154 | FR155 | FR156 | FR157 | Unit |
|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-------------|-------|-------|-------|-------|-------|-------|------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                                | V <sub>RRM</sub><br>V <sub>RWM</sub><br>V <sub>R</sub> | 50          | 100   | 200   | 400   | 600   | 800   | 1000  | V    |
| RMS Reverse Voltage                                                                                                   | V <sub>R(RMS)</sub>                                    | 35          | 70    | 140   | 280   | 420   | 560   | 700   | V    |
| Average Rectified Output Current<br>(Note 1)<br>@T <sub>A</sub> = 55°C                                                | I <sub>O</sub>                                         | 1.5         |       |       |       |       |       |       | A    |
| Non-Repetitive Peak Forward Surge Current<br>8.3ms Single half sine-wave superimposed on<br>rated load (JEDEC Method) | I <sub>FSM</sub>                                       | 60          |       |       |       |       |       |       | A    |
| Forward Voltage<br>@I <sub>F</sub> = 1.5A                                                                             | V <sub>FM</sub>                                        | 1.2         |       |       |       |       |       |       | V    |
| Peak Reverse Current<br>@T <sub>A</sub> = 25°C<br>At Rated DC Blocking Voltage<br>@T <sub>A</sub> = 100°C             | I <sub>RM</sub>                                        | 5.0<br>100  |       |       |       |       |       |       | μA   |
| Reverse Recovery Time (Note 2)                                                                                        | t <sub>rr</sub>                                        | 150         |       |       |       | 250   | 500   |       | nS   |
| Typical Junction Capacitance (Note 3)                                                                                 | C <sub>j</sub>                                         | 30          |       |       |       |       |       |       | pF   |
| Operating Temperature Range                                                                                           | T <sub>j</sub>                                         | -65 to +125 |       |       |       |       |       |       | °C   |
| Storage Temperature Range                                                                                             | T <sub>STG</sub>                                       | -65 to +150 |       |       |       |       |       |       | °C   |

Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case  
 2. Measured with I<sub>F</sub> = 0.5A, I<sub>R</sub> = 1.0A, I<sub>RR</sub> = 0.25A. See figure 5.  
 3. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

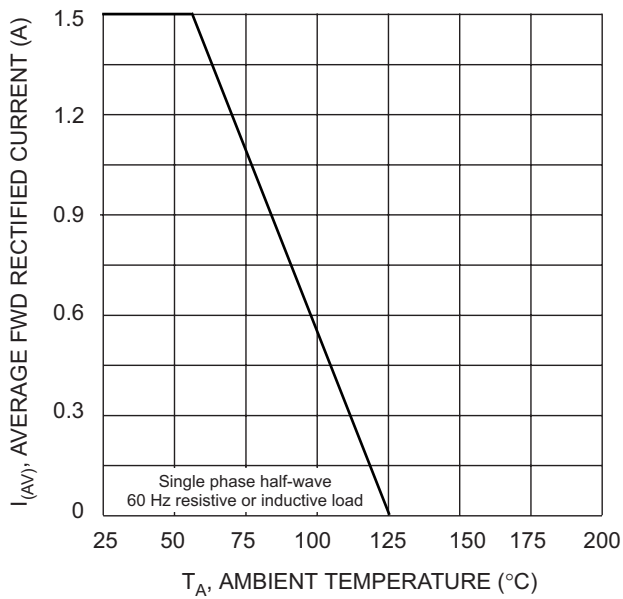


Fig. 1 Forward Derating Curve

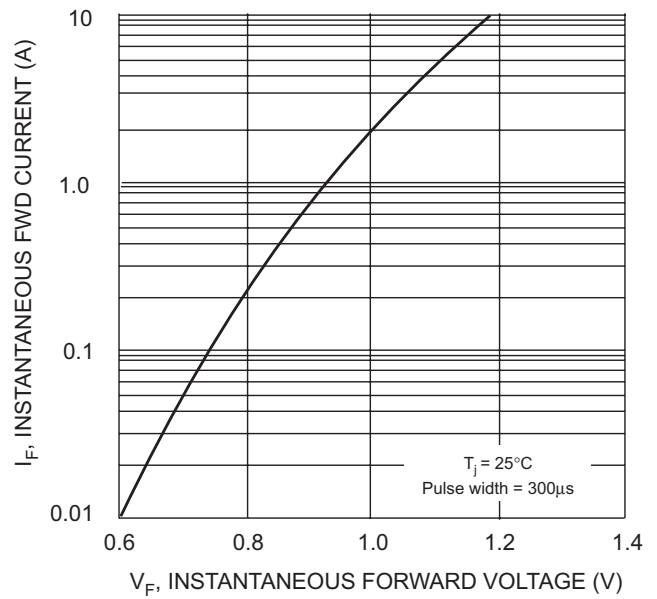


Fig. 2 Typical Forward Characteristics

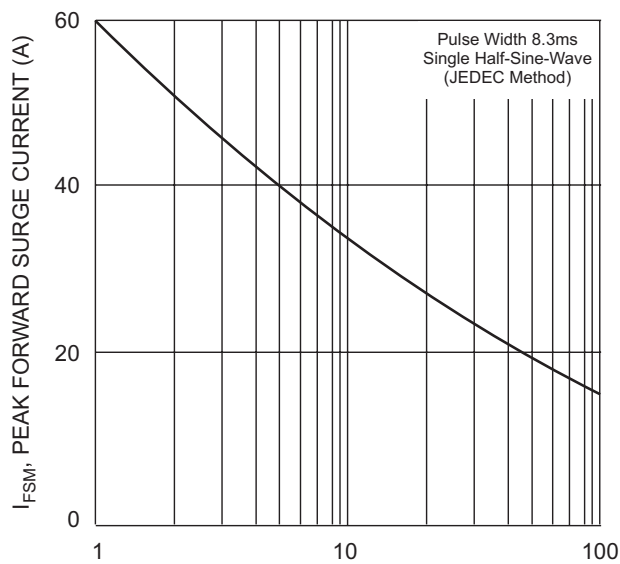


Fig. 3 Peak Forward Surge Current


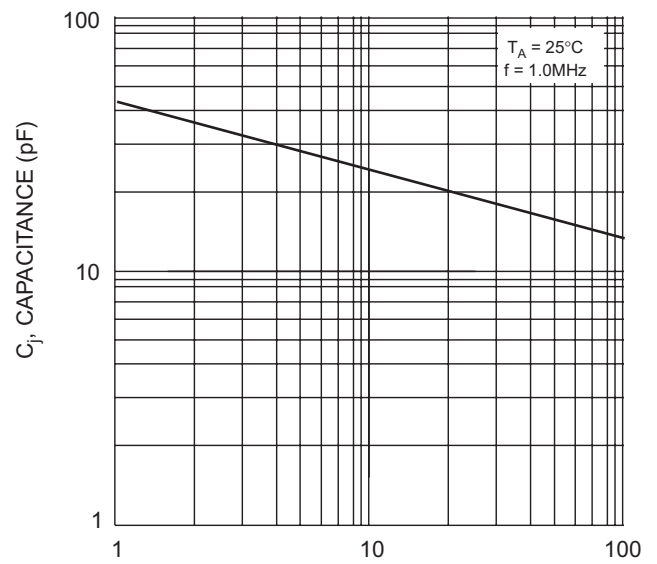


Fig. 4 Typical Junction Capacitance

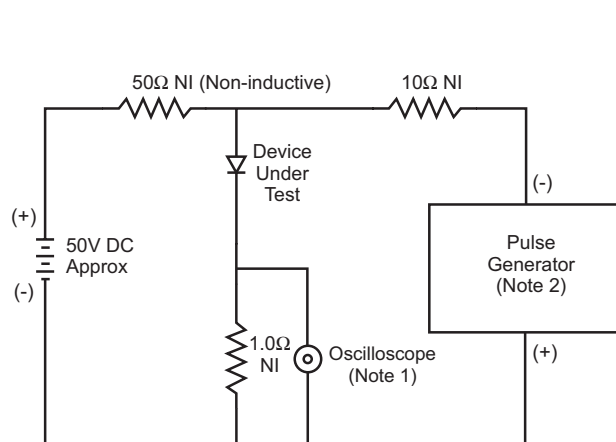


- Notes:
1. Rise Time = 7.0ns max. Input Impedance = 1.0MΩ, 22pF.
  2. Rise Time = 10ns max. Input Impedance = 50Ω.

Set time base for 5/10ns/cm

Fig. 5 Reverse Recovery Time Characteristic and Test Circuit

## MARKING INFORMATION

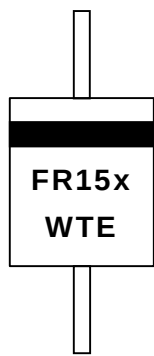

Cathode = Polarity Band  
 FR15x = Device Number  
 x = 1, 2, 3, 4, 5, 6 or 7  
 WTE = Manufacturer's Logo

## TAPING SPECIFICATIONS



## PACKAGING INFORMATION


### TAPE & REEL



### TAPE & BOX



### BULK

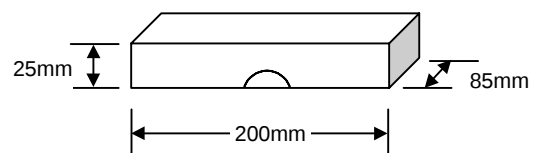

| Packaging              | Reel Diameter / Box Size (mm) | Quantity (PCS) | Carton Size (mm) | Quantity (PCS) | Approx. Gross Weight (KG) |
|------------------------|-------------------------------|----------------|------------------|----------------|---------------------------|
| <b>TAPE &amp; REEL</b> | 330                           | 4,000          | 370 x 370 x 420  | 20,000         | 12.0                      |
| <b>TAPE &amp; BOX</b>  | 255 x 75 x 150                | 3,000          | 400 x 273 x 415  | 30,000         | 15.0                      |
| <b>BULK</b>            | 200 x 85 x 25                 | 1,000          | 459 x 214 x 256  | 40,000         | 17.5                      |

**Note:** 1. Paper reel, white or gray color. Core material: plastic or metal.  
 2. Components are packed in accordance with EIA standard RS-296-E.

## ORDERING INFORMATION

| Product No.     | Package Type | Shipping Quantity |
|-----------------|--------------|-------------------|
| FR151-T3        | DO-15        | 4000/Tape & Reel  |
| <b>FR151-TB</b> | DO-15        | 3000/Tape & Box   |
| FR151           | DO-15        | 1000 Units/Box    |
| FR152-T3        | DO-15        | 4000/Tape & Reel  |
| <b>FR152-TB</b> | DO-15        | 3000/Tape & Box   |
| FR152           | DO-15        | 1000 Units/Box    |
| FR153-T3        | DO-15        | 4000/Tape & Reel  |
| <b>FR153-TB</b> | DO-15        | 3000/Tape & Box   |
| FR153           | DO-15        | 1000 Units/Box    |
| FR154-T3        | DO-15        | 4000/Tape & Reel  |
| <b>FR154-TB</b> | DO-15        | 3000/Tape & Box   |
| FR154           | DO-15        | 1000 Units/Box    |
| FR155-T3        | DO-15        | 4000/Tape & Reel  |
| <b>FR155-TB</b> | DO-15        | 3000/Tape & Box   |
| FR155           | DO-15        | 1000 Units/Box    |
| FR156-T3        | DO-15        | 4000/Tape & Reel  |
| <b>FR156-TB</b> | DO-15        | 3000/Tape & Box   |
| FR156           | DO-15        | 1000 Units/Box    |
| FR157-T3        | DO-15        | 4000/Tape & Reel  |
| <b>FR157-TB</b> | DO-15        | 3000/Tape & Box   |
| FR157           | DO-15        | 1000 Units/Box    |

1. Products listed in **bold** are WTE **Preferred** devices.
2. Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.
3. **To order RoHS / Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, FR151-TB-LF.**

Won-Top Electronics Co., Ltd (WTE) has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

**WARNING:** DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

### Won-Top Electronics Co., Ltd.

No. 44 Yu Kang North 3rd Road, Chine Chen Dist., Kaohsiung, Taiwan

**Phone:** 886-7-822-5408 or 886-7-822-5410

**Fax:** 886-7-822-5417

**Email:** sales@wontop.com

**Internet:** <http://www.wontop.com>

*We power your everyday.*

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)