




20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

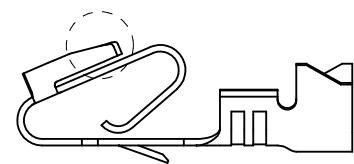



ALTERNATE GEOMETRY
SEE NOTE 10

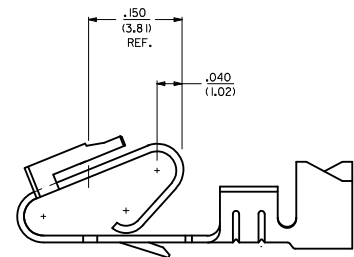


SELECTIVE PLATING
LOCATION



CUT OFF DIM.

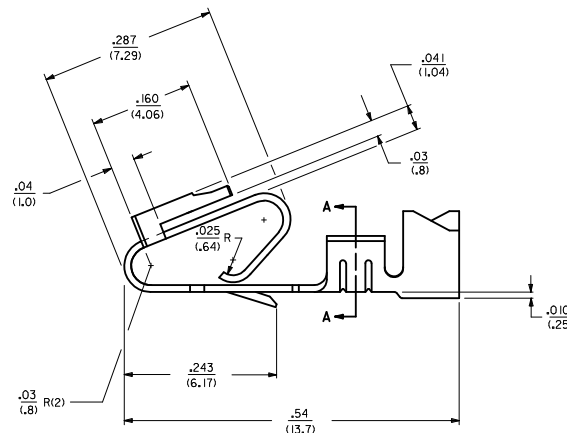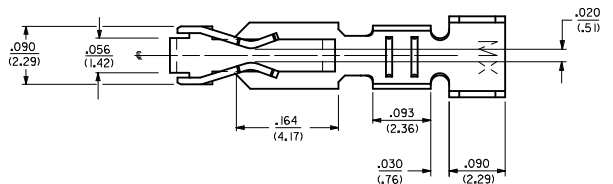

- NOTES:
1. MATERIAL: SEE LEGEND
2. FINISH:
909 - OVERALL HOT TIN DIP: .000100/(0.00254) MIN.
154 - OVERALL TIN: .000100/(0.00254) MIN. OVER
.000050/(0.00127) MIN. NICKEL.
555 - SELECT HARD GOLD: .000015/(0.00038) MIN.
OVERALL NICKEL: .000030/(0.00076) MIN.
558 - SELECT HARD GOLD: .000030/(0.00076) MIN.
OVERALL NICKEL: .000050/(0.00127) MIN.
OVERALL HARD GOLD FLASH: .000002/(0.00005) MIN.
561 - SELECT HARD GOLD: .000030/(0.00076) MIN.
OVERALL NICKEL: .000050/(0.00127) MIN.
3. PRODUCT SPECIFICATION: PS-40-02
4. PACKAGING SPECIFICATION: CHAIN FORM: SEE PK-6838-001
LOOSE FORM: SEE PK-2759-001
5. TERMINAL FOR USE IN HOUSING SERIES 6442 AND 41695.
6. SEE 7258 SERIES FOR THIS PART WITH CRIMP FOR 22-26 AWG. WIRE.
7. CRIMP FOR 18 TO 20 GA. WIRE WITH MAX. INSULATION DIA. OF .100/(2.79).
STRIP LENGTH OF .125/100 / (3.18/2.54)
8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT
THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
10. ALTERNATE GEOMETRY PRESENT ON SOME PART NUMBERS. SEE SHEET 2.

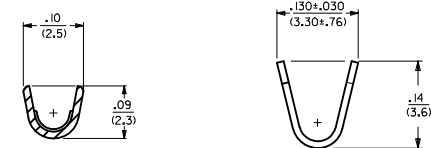


SECTION A-A

LEGEND: 6838- () () ()
WINDING
A= PER DETAIL A
BLANK= PER DETAIL B
FORM
BLANK= CHAIN
L= LOOSE
PLATING
SEE NOTE 2


MATERIAL:
(.271/.0106 THK
BLANK=BRASS
A=PHOS BRONZE

WINDING DETAIL 'A'



PAPER
INTERLEAF

WINDING DETAIL 'B'



PAPER
INTERLEAF


102 TO 154 PLTG. EC NO. UCP2012-1821 DRAWN BY: CHYKMIK/PER 2012/01/04 2012/01/05 2012/02/02 APPROVED BY: LTH	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	DATE 11/15/89
			mm INCH		DRAWN BY GUZIK	DATE 11/15/89	TITLE TRIFURCON TERMINAL CRIMP TYPE, .156 CENTERS 18 TO 20 AWG WIRE			
			4 PLACES ± --- ± ---		CHECKED BY PATEL	DATE 11/15/89	MOLEX INCORPORATED			
			3 PLACES ± --- ± .010 2 PLACES ± .25 ± .015 1 PLACE ± .36 ± .015		APPROVED BY LENZ	DATE 11/15/89	DOCUMENT NO. SD-6838			
			ANGULAR ±1/2°		MATERIAL NO. SEE CHART		SHEET NO. 1 OF 2			
AR	NEW		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
M	6838-(*)**					6838-A(*)**															M
	PART NO.	ENG. NO.				PART NO.	ENG. NO.														
	08-50-0187	6838-(P909)		SEE NOTE 1		08-58-0187	6838-A(P558)														
	08-50-0189	6838-(P909)L		SEE NOTE 1		08-58-0189	6838-A(P558)L														
	08-50-0275	6838-(P909)-A				08-52-0112	6838-A(P909)		SEE NOTE 1												
L						08-52-0113	6838-A(P909)L		SEE NOTE 1												L
						08-50-0024	6838-A(154)														
						08-50-0251	6838-A(154)L														
						08-58-0105	6838-A(P555)														
K						08-58-0106	6838-A(P555)L														K
						08-58-0110	6838-A(P56 I)		SEE NOTE 1												
						08-58-0111	6838-A(P56 I)L		SEE NOTE 1												
						08-58-0118	6838-A(56 I)														
						08-58-0119	6838-A(56 I)L														
J																					J
I																					I
H																					H
G																					G
F																					F
E																					E
D																					D
C																					C
B																					B
A																					A


NOTES:

1. PART MANUFACTURED WITH ALTERNATE GEOMETRY. SEE SHEET 1.

SEE SHEET 1 EC NO. UCP2012-1821 DRAWN BY: CHYKMK/PPER CHECKED BY: APPR:FSM/TH REV AR	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION											
	▽=0	<table><tr><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES ± --- ± ---</td><td>± --- ± ---</td></tr><tr><td>3 PLACES ± --- ± ---</td><td>± --- ± ---</td></tr><tr><td>2 PLACES ± --- ± ---</td><td>± --- ± ---</td></tr><tr><td>1 PLACE ± --- ± ---</td><td>± --- ± ---</td></tr></table>		mm	INCH	4 PLACES ± --- ± ---	± --- ± ---	3 PLACES ± --- ± ---	± --- ± ---	2 PLACES ± --- ± ---	± --- ± ---	1 PLACE ± --- ± ---	± --- ± ---	DRAWN BY GUZIK		DATE 11/15/89	TITLE TRIFURCON TERMINAL CRIMP TYPE .156 CENTERS 18 TO 20 AWG WIRE		
	mm	INCH																	
	4 PLACES ± --- ± ---	± --- ± ---																	
	3 PLACES ± --- ± ---	± --- ± ---																	
	2 PLACES ± --- ± ---	± --- ± ---																	
	1 PLACE ± --- ± ---	± --- ± ---																	
	▽=0			CHECKED BY PATEL		DATE 11/15/89													
	▽=0			APPROVED BY LENZ		DATE 11/15/89	MOLEX INCORPORATED												
	ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.														
DRAFT WHERE APPLICABLE		SEE CHART		SD-6838		SHEET NO. 2 OF 2													
MUST REMAIN WITHIN DIMENSIONS		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															

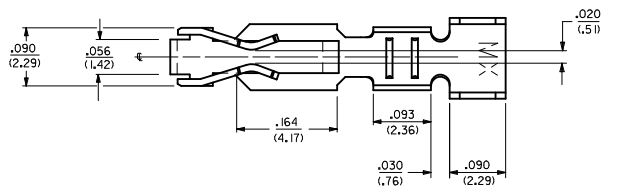

- NOTES:
1. MATERIAL: SEE LEGEND
 2. FINISH: 909 - OVERALL HOT TIN DIP: .000100/10.00254) MIN.
 3. PRODUCT SPECIFICATION: PS-40-02
 4. PACKAGING SPECIFICATION: PK-6838-001
 5. PART IS FOR USE WITH 18 TO 20 GA. WIRE WITH MAX. INSULATION DIA. OF .110/12.79), STRIP LENGTH OF .125/100 / (3.18/2.54).
 6. SEE 7258 SERIES FOR THIS PART WITH CRIMP FOR 22-26 AWG. WIRE.
 7. TERMINAL FOR USE IN 6442 AND 41695 SERIES HOUSINGS.
 8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
 9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

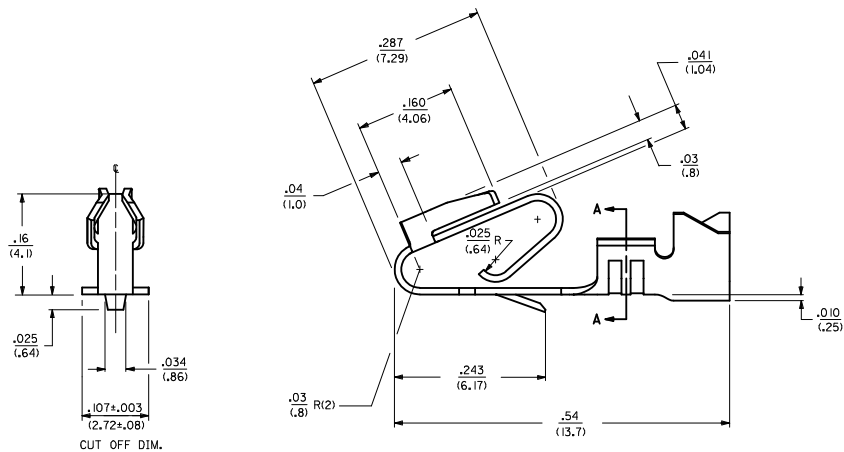



SECTION A-A

LEGEND: 6838- (P909) * *
WINDING
BLANK= PER DETAIL B
FORM
BLANK= CHAIN
PLATING PER SDES-88
SEE NOTE 2

MATERIAL:
(.27)/.0106 THK
BLANK=BRASS

WINDING DETAIL "A"

WINDING DETAIL "B"

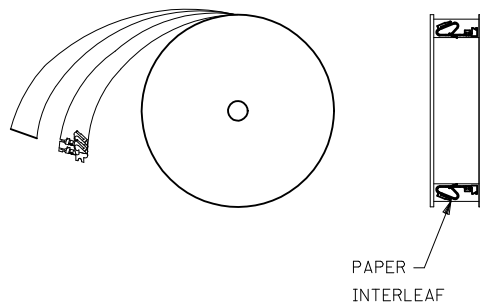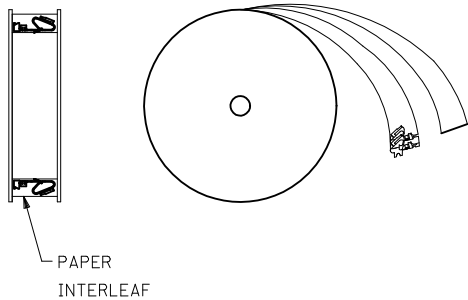

UPDATE GEOMETRY EC NO: UCP2011-0681 DRAWN/KIPER CHKD/SSOUSEK APPR/FSM TH REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		mm INCH		DRAWN BY JJS	DATE 07/29/04	TITLE TRIFURCON TERMINAL CRIMP TYPE .156 CENTERS 18 TO 20 AWG WIRE			
		4 PLACES ± --- ± ---		CHECKED BY KSS	DATE 07/29/04	MOLEX INCORPORATED			
		3 PLACES ± --- ± .010		APPROVED BY YM	DATE 07/29/04	MATERIAL NO. 50291639			
		2 PLACES ± 0.25 ± .015		DOCUMENT NO. SD-6838-001		SHEET NO. 1 OF 1			
		1 PLACE ± 0.36 ± ---		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
		ANGULAR ±1/2°							
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru