
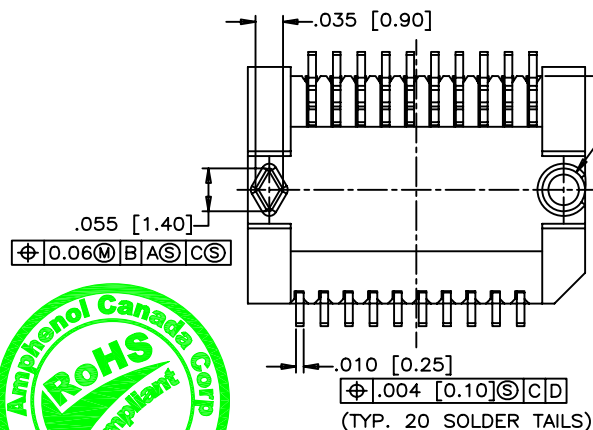
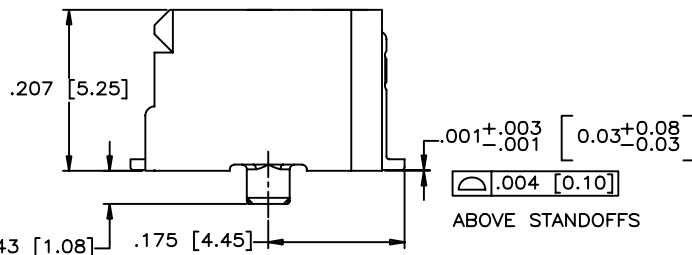
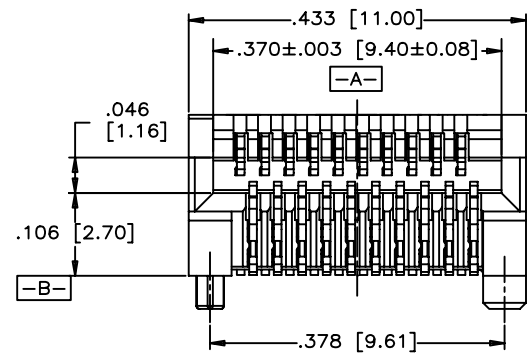


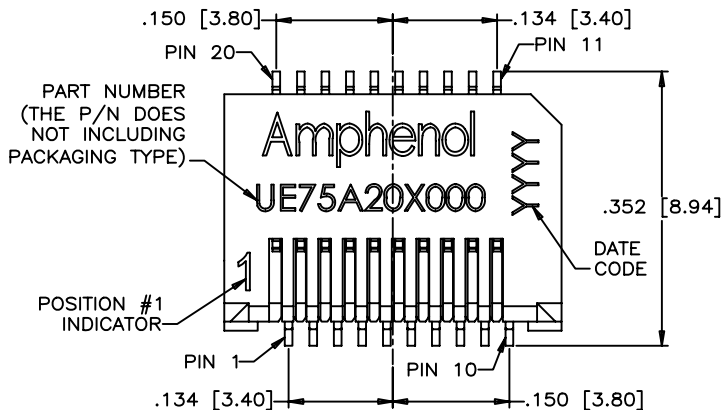

- AMPHENOL PART NUMBER CONFIGURATION**
- UX75 - A 20 - X 0 0 X T
- SFP RECEPTACLE**
 U75 = NON-RoHS
 UE75 = RoHS COMPLIANT
- CONTACT PLATING**
 (FOR U75 NON-RoHS)
 1 = PLATING OPTION 1 (SEE MATERIAL NOTES)
 4 = PLATING OPTION 4 (SEE MATERIAL NOTES)
 (FOR UE75 RoHS)
 2 = PLATING OPTION 2 (SEE MATERIAL NOTES)
 3 = PLATING OPTION 3 (SEE MATERIAL NOTES)
 5 = PLATING OPTION 5 (SEE MATERIAL NOTES)
 6 = PLATING OPTION 6 (SEE MATERIAL NOTES)
- LUBRICANT OPTION ON MATING AREA**
 0 = NO
 1 = YES

REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
H		P/N ADDED FOR LUBRICANT OPTION	2006/10/23	J.S.
J		UPDATED	APR26/07	J.S.
K		UPDATED MATERIAL FOR HOUSING	MAY28/07	J.S.

THIS IS A CAD DRAWING. DO NOT MANUALLY REVISE.
 MATERIAL NOTES:

PLASTIC HOUSING:
 HIGH TEMPERATURE LCP
 FLAMMABILITY RATING UL94V-0.

CONTACTS:
 PHOSPHOR BRONZE
 PLATING OPTION 1: (U75 ONLY)
 30μ" [0.76 μm] MIN. GOLD ON MATING AREA AND 150-300 μ" (3.81-7.62 μm) MIN. TIN/LEAD (90/10) PLATING ON TERMINATION OVER 50μ" [1.27 μm] MIN. NICKEL UNDER LAYER.
 PLATING OPTION 2: (RoHS FOR UE75 ONLY)
 30μ" [0.76 μm] MIN. GOLD ON MATING AREA AND 2 μ" (0.05 μm) GOLD FLASH PLATING ON TERMINATION OVER 50μ" [1.27 μm] MIN. NICKEL UNDER LAYER.
 PLATING OPTION 3: (RoHS FOR UE75 ONLY)
 30μ" [0.76 μm] MIN. GOLD ON MATING AREA AND 150-300 μ" (3.81-7.62 μm) MIN. LOW WHISKER MATTE TIN PLATING ON TERMINATION OVER 50μ" [1.27 μm] MIN. NICKEL UNDER LAYER.
 PLATING OPTION 4: (FOR U75 ONLY)
 15μ" [0.38 μm] MIN. GOLD ON MATING AREA AND 150-300 μ" (3.81-7.62 μm) MIN. TIN/LEAD (90/10) PLATING ON TERMINATION OVER 50μ" [1.27 μm] MIN. NICKEL UNDER LAYER.
 PLATING OPTION 5: (RoHS FOR UE75 ONLY)
 15μ" [0.38 μm] MIN. GOLD ON MATING AREA AND 2 μ" (0.05 μm) GOLD FLASH PLATING ON TERMINATION OVER 50μ" [1.27 μm] MIN. NICKEL UNDER LAYER.
 PLATING OPTION 6: (RoHS FOR UE75 ONLY)
 15μ" [0.38 μm] MIN. GOLD ON MATING AREA AND 150-300 μ" (3.81-7.62 μm) MIN. LOW WHISKER MATTE TIN PLATING ON TERMINATION OVER 50μ" [1.27 μm] MIN. NICKEL UNDER LAYER.
 LUBRICANT OPTION: LUBRICANT CAN BE ADDED ON THE CONTACTS MATING AREA (SEE P/N FOR THE OPTION)

PACKAGING:
 TAPE AND REEL.

TEMPERATURE RANGE:
 -40°C TO +85°C


DRAWN	J.SI	DATE	2005/03/08
DESIGNED	J.SI	DATE	2005/03/08
CHECKED	X		
I. E. APPRD.			
Q. A. APPRD.			
DWG. APPRD.			
ENG. REL. NO.			
REF.	X		
DIMENSIONS ARE IN	INCHES [mm]	CODE ID. NO.	03554
SCALE	4/1	WT.	-----
SURF.	-----	SHEET	1 OF 3

Amphenol Canada Corp.

TITLE
 SFP 20 POSITION HIGH SPEED CONNECTOR
 RECEPTACLE FIXED BOARD, RIGHT ANGLE SMT
 OPTIONAL PLATING AND LUBRICANT ON MATING

DWG. DRAWING NO.
 A P-UX75-A20-X00XX

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

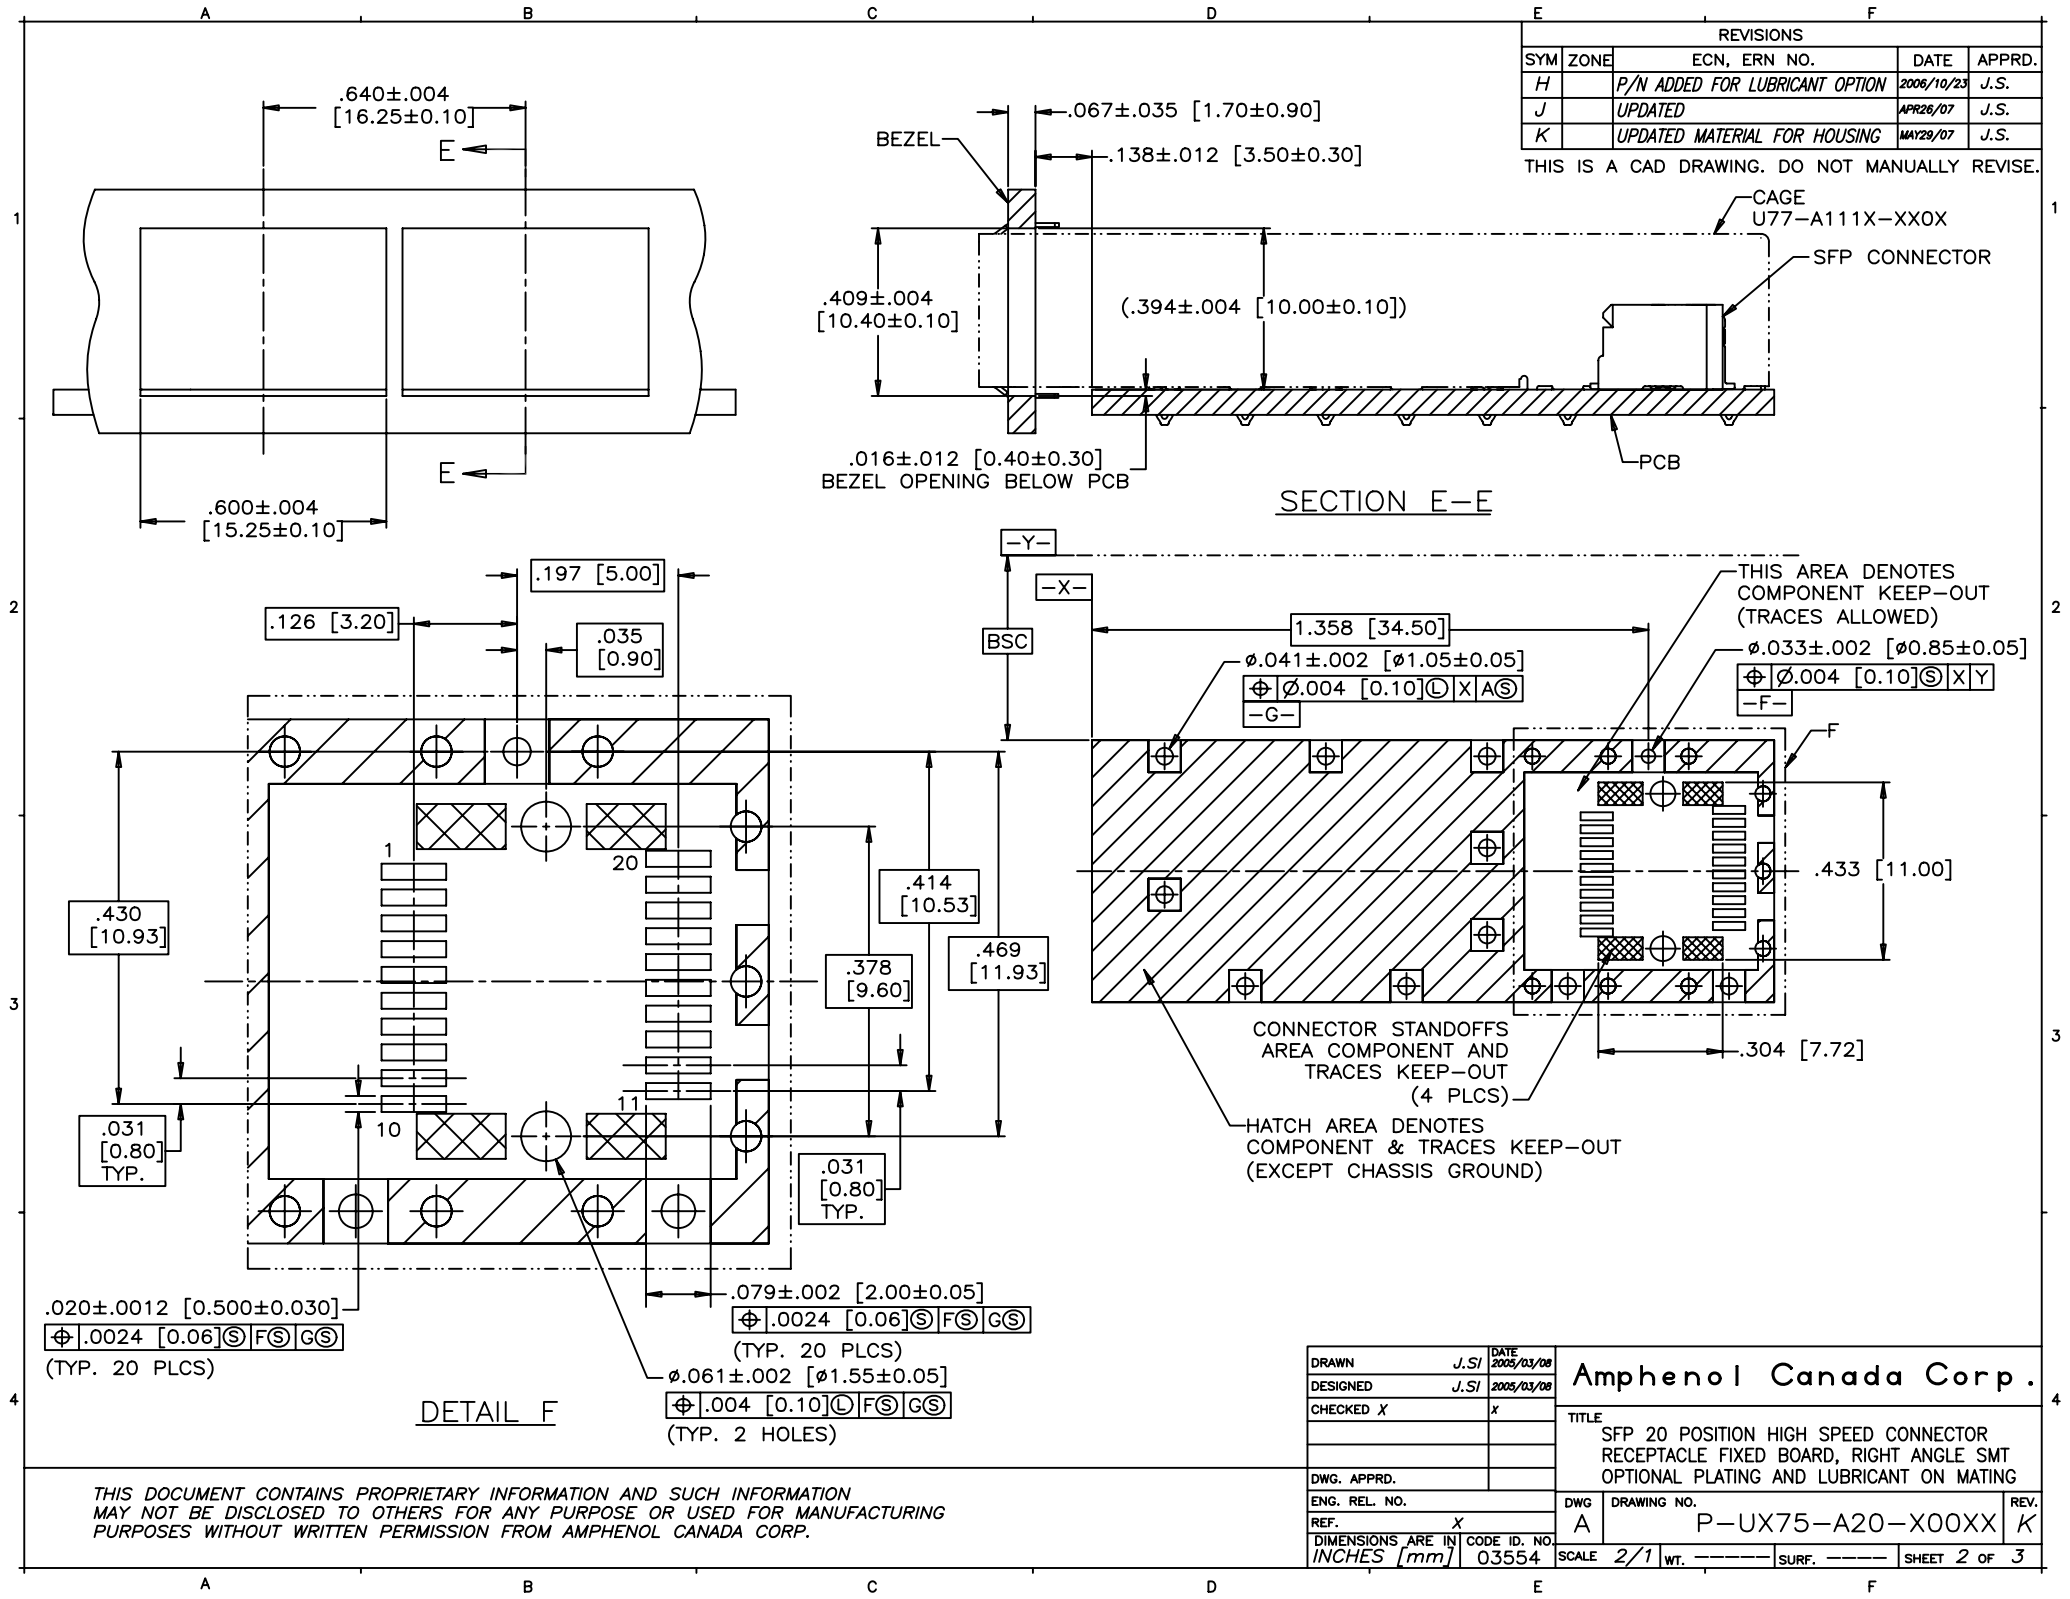

REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
H		P/N ADDED FOR LUBRICANT OPTION	2006/10/23	J.S.
J		UPDATED	APR26/07	J.S.
K		UPDATED MATERIAL FOR HOUSING	MAY29/07	J.S.

THIS IS A CAD DRAWING. DO NOT MANUALLY REVISE.

SECTION E-E

DETAIL F


DRAWN	J.SI	DATE	2005/03/08
DESIGNED	J.SI	DATE	2005/03/08
CHECKED	X		
DWG. APPRD.			
ENG. REL. NO.			
REF.	X		
DIMENSIONS ARE IN	INCHES (mm)	CODE ID. NO.	03554

Amphenol Canada Corp.		
TITLE		
SFP 20 POSITION HIGH SPEED CONNECTOR RECEPTACLE FIXED BOARD, RIGHT ANGLE SMT OPTIONAL PLATING AND LUBRICANT ON MATING		
DWG	DRAWING NO.	REV.
A	P-UX75-A20-X00XX	K
SCALE	2/1	WT. _____
SURF.	_____	SHEET 2 OF 3

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
H		P/N ADDED FOR LUBRICANT OPTION	2006/10/23	J.S.
J		UPDATED	APR26/07	J.S.
K		UPDATED MATERIAL FOR HOUSING	MAY29/07	J.S.

THIS IS A CAD DRAWING. DO NOT MANUALLY REVISE.

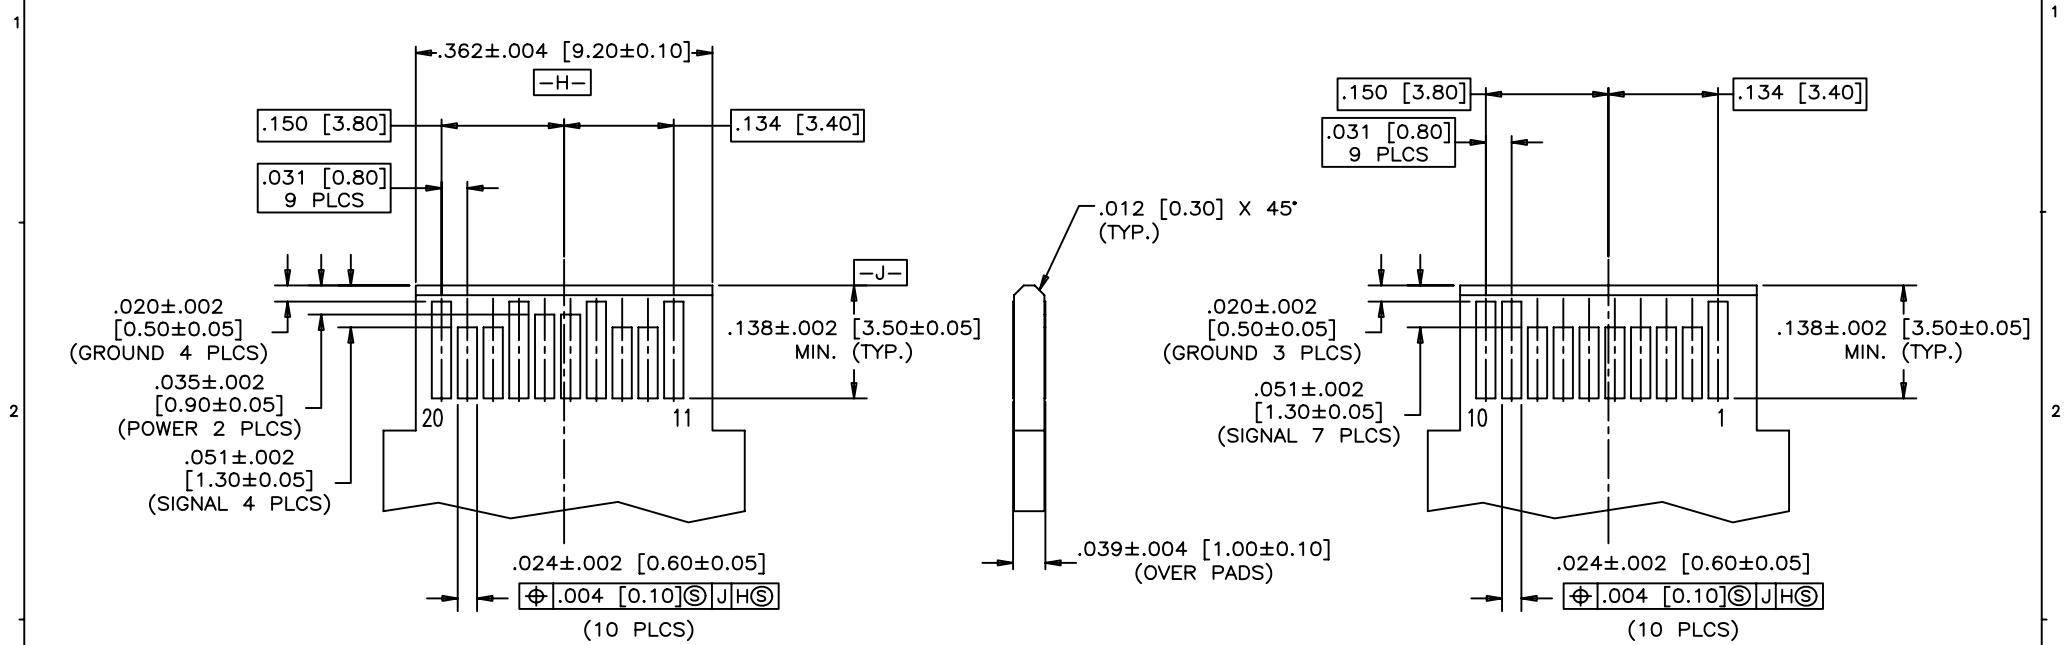

TOP VIEW OF BOARD

BOTTOM VIEW OF BOARD

RECOMMENDED LAYOUT DETAIL
MATING TRANSCEIVER PCB

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN	J.SI	DATE	2005/03/08
DESIGNED	J.SI	DATE	2005/03/08
CHECKED	X		
DWG. APPRD.			
ENG. REL. NO.			
REF.	X		
DIMENSIONS ARE IN	INCHES (mm)	CODE ID. NO.	03554

Amphenol Canada Corp.	
TITLE	SFP 20 POSITION HIGH SPEED CONNECTOR RECEPTACLE FIXED BOARD, RIGHT ANGLE SMT OPTIONAL PLATING AND LUBRICANT ON MATING
DWG	A
DRAWING NO.	P-UX75-A20-X00XX
REV.	K
SCALE	4:1
WT.	-----
SURF.	-----
SHEET	3 OF 3

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru