

Small Signal Product

350 mW High Speed SMD Switching Diode

FEATURES

- Designed for mounting on small surface
- Extremely thin / leadless package
- High mounting capability, strong surge with stand, high reliability
- Pb free version and RoHS compliant
- Halogen free


1005


MECHANICAL DATA

- Case: 1005
- Terminal: Gold plated, solderable per MIL-STD-750, method 2026
- Polarity: Indicated by cathode band
- Weight: 6 mg (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)				
PARAMETER	SYMBOL	VALUE	UNIT	
Power Dissipation	P _D	350	mW	
Non-Repetitive Peak Reverse Voltage	V _{RSM}	100	V	
Repetitive Peak Reverse Voltage	V _{RRM}	75	V	
Repetitive Peak Forward Current	I _{FRM}	300	mA	
Mean Forward Current	I _O	150	mA	
Non-Repetitive Peak Forward Surge Current	I _{FSM}	Pulse Width=1μs	4.0	A
		Pulse Width=1ms	1.0	
Thermal Resistance (Note 1)	R _{θJA}	500	°C/W	
Junction and Storage Temperature Range	T _J , T _{STG}	-40 to +125	°C	

PARAMETER	SYMBOL	MIN	MAX	UNIT
Reverse Breakdown Voltage (Note 2)	V _(BR)	-	75	V
Forward Voltage I _F =50mA	V _F	-	1.0	V
Reverse Leakage Current V _R =20V	I _R	-	25	nA
		-	2.5	μA
Junction Capacitance V _R =0, f=1.0MHz	C _J		4.0	pF
Reverse Recovery Time (Note 3)	t _{rr}		4	ns

Note 1: Valid provided that electrodes are kept at ambient temperature

 Note 2: Test condition: I_R=100μA

 Note 3: Test condition: I_F=I_R=30mA, R_L=100Ω, I_{RR}=3mA

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Fig. 1 Typical Forward Characteristics

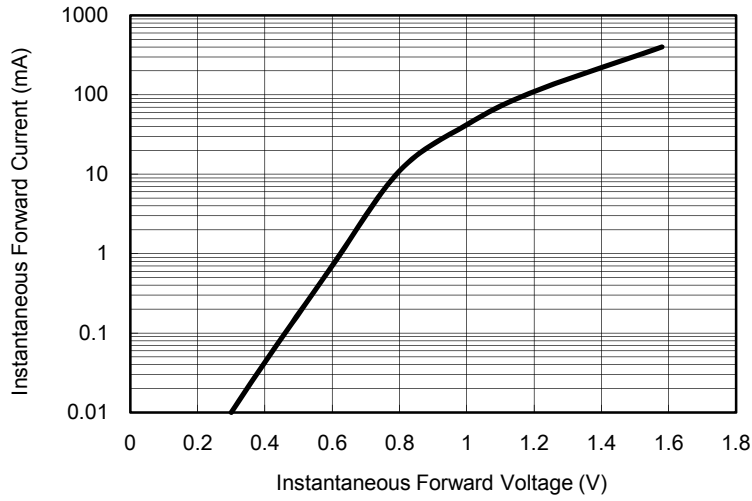


Fig. 2 Reverse Current VS. Reverse Voltage

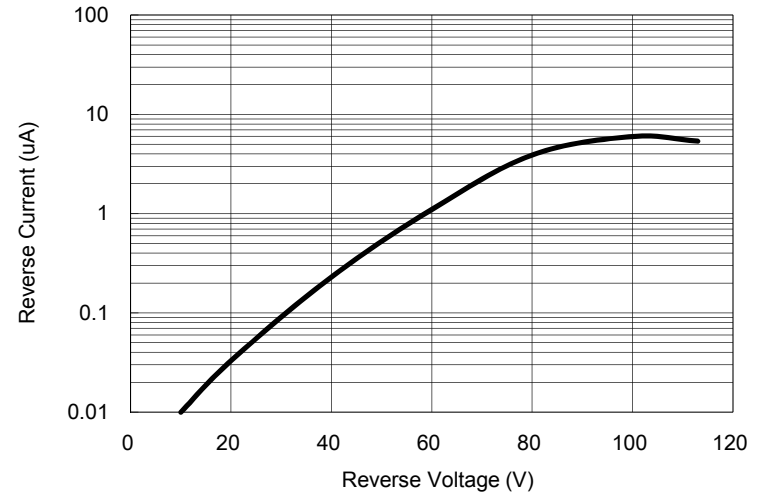


Fig. 3 Admissible Power Dissipation Curve

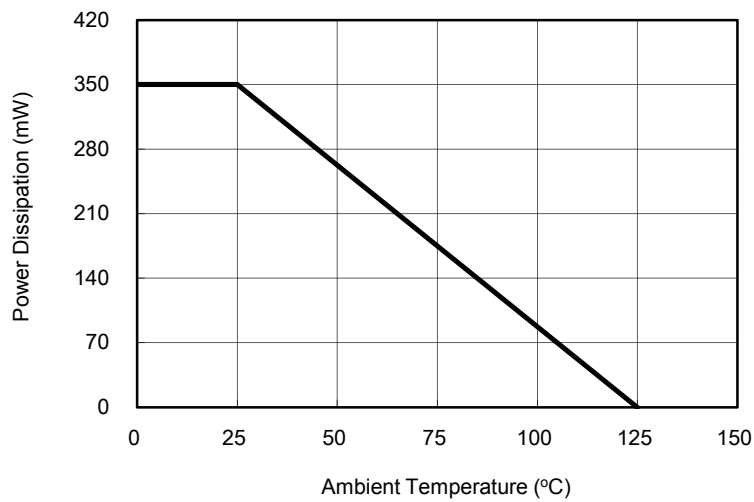


Fig. 4 Typical Junction Capacitance


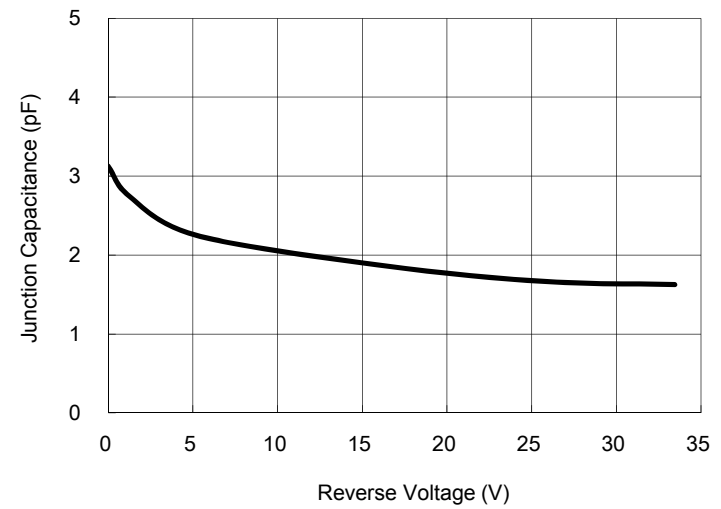


Fig. 5 Forward Resistance VS. Forward Current

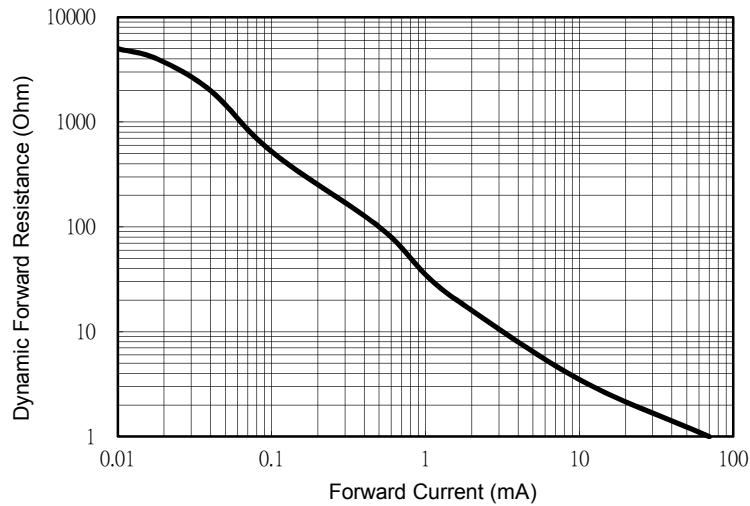

Small Signal Product

ORDERING INFORMATION

PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
TS4148	-xx (Note 1)	RW	G	1005	4K / 7" Reel


Note 1: Part No. Suffix „-xx “ would be used for special requirement

EXAMPLE

PREFERRED PART NO.	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
TS4148 RWG	TS4148		RW	G	Multiple manufacture source Green compound
TS4148-F0 RWG	TS4148	-F0	RW	G	Defined manufacture source Green compound

PACKAGE OUTLINE DIMENSION

1005

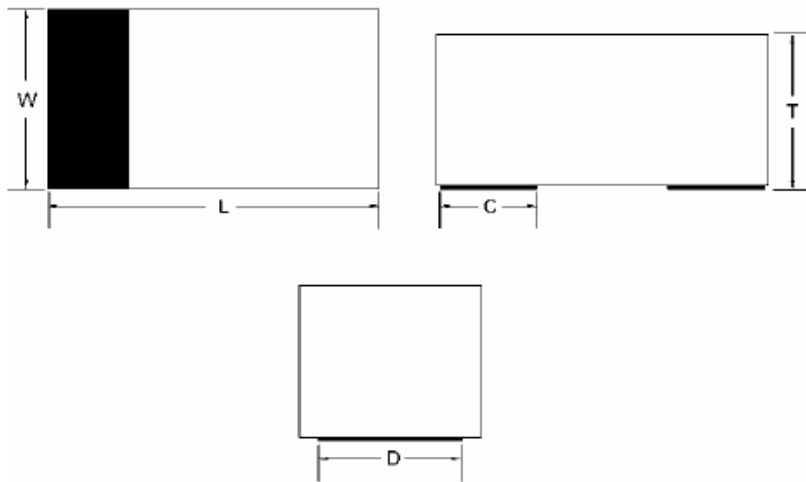

DIM.	Unit (mm)			Unit (inch)		
	Min	Typ	Max	Min	Typ	Max
L	2.40	-	2.60	0.094	-	0.102
W	1.10	-	1.30	0.043	-	0.051
T	0.70	-	0.90	0.028	-	0.035
C	-	0.50	-	-	0.020	-
D	-	1.00	-	-	0.039	-

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru