


# SPECIFICATION CONTROL DRAWING

55A0813

|                                                                                         |                                                                                                   |      |         |          |    |
|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------|---------|----------|----|
| TITLE                                                                                   | WIRE, RADIATION-CROSSLINKED, MODIFIED ETFE-INSULATED,<br>NORMAL WEIGHT, GENERAL PURPOSE, 600 VOLT | Date | 28MAR11 | Revision | R1 |
| This specification sheet forms a part of the latest issue of Raychem Specification 55A. |                                                                                                   |      |         |          |    |

CONDUCTOR - NICKEL-COATED COPPER

PRIMARY INSULATION - RADIATION-CROSSLINKED,  
MODIFIED ETFE  
Primary insulation shall be of a  
contrasting pigmentation to that  
of the jacket.

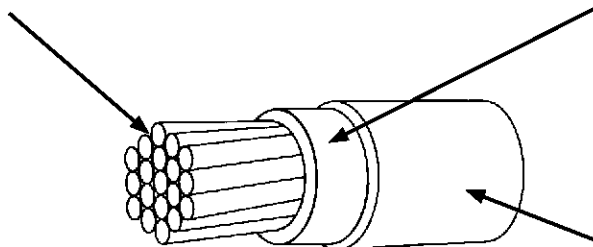

JACKET - RADIATION-CROSSLINKED,  
MODIFIED ETFE

TABLE I. CONSTRUCTION DETAILS

| PART NUMBER<br>1/ | WIRE<br>SIZE<br>(AWG) | CONDUCTOR<br>STRANDING<br>(number x AWG) | DIAMETER OF<br>STRANDED<br>CONDUCTOR<br>(in.) |         | FINISHED WIRE                                       |                   |                                     |
|-------------------|-----------------------|------------------------------------------|-----------------------------------------------|---------|-----------------------------------------------------|-------------------|-------------------------------------|
|                   |                       |                                          | MINIMUM                                       | MAXIMUM | MAXIMUM<br>RESISTANCE<br>AT 20°C<br>(ohms/1000 ft.) | DIAMETER<br>(in.) | MAXIMUM<br>WEIGHT<br>(lbs/1000 ft.) |
| 55A0813-26-*      | 26                    | 19 x 38                                  | .018                                          | .020    | 42.2                                                | .040 ± .002       | 1.7                                 |
| 55A0813-24-*      | 24                    | 19 x 36                                  | .023                                          | .025    | 25.9                                                | .045 ± .002       | 2.3                                 |
| 55A0813-22-*      | 22                    | 19 x 34                                  | .029                                          | .031    | 16.0                                                | .050 ± .002       | 3.2                                 |
| 55A0813-20-*      | 20                    | 19 x 32                                  | .037                                          | .039    | 9.77                                                | .058 ± .002       | 4.7                                 |
| 55A0813-18-*      | 18                    | 19 x 30                                  | .046                                          | .049    | 6.10                                                | .070 ± .003       | 7.2                                 |
| 55A0813-16-*      | 16                    | 19 x 29                                  | .052                                          | .055    | 4.76                                                | .077 ± .003       | 9.0                                 |
| 55A0813-14-*      | 14                    | 19 x 27                                  | .065                                          | .069    | 3.00                                                | .094 ± .003       | 13.8                                |
| 55A0813-12-*      | 12                    | 37 x 28                                  | .084                                          | .089    | 1.98                                                | .111 ± .003       | 20.5                                |
| 55A0813-10-*      | 10                    | 37 x 26                                  | .106                                          | .113    | 1.24                                                | .134 ± .004       | 32.4                                |
| 55A0813- 8-*      | 8                     | 133 x 29                                 | .158                                          | .173    | .694                                                | .195 ± .008       | 64.2                                |
| 55A0813- 6-*      | 6                     | 133 x 27                                 | .198                                          | .217    | .436                                                | .241 ± .010       | 96.8                                |
| 55A0813- 4-*      | 4                     | 133 x 25                                 | .250                                          | .274    | .275                                                | .310 ± .010       | 163.                                |
| 55A0813- 2-*      | 2                     | 665 x 30                                 | .320                                          | .340    | .177                                                | .408 ± .012       | 256.                                |
| 55A0813- 1-*      | 1                     | 817 x 30                                 | .360                                          | .380    | .144                                                | .470 ± .012       | 325.                                |
| 55A0813- 0-*      | 0                     | 1045 x 30                                | .395                                          | .425    | .113                                                | .510 ± .016       | 427.                                |
| 55A0813-00-*      | 00                    | 1330 x 30                                | .440                                          | .475    | .089                                                | .570 ± .016       | 531.                                |
| 55A0813-000-*     | 000                   | 1665 x 30                                | .500                                          | .540    | .071                                                | .610 ± .016       | 616.                                |
| 55A0813-0000-*    | 0000                  | 2109 x 30                                | .565                                          | .605    | .056                                                | .675 ± .022       | 763.                                |

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.  
TE Connectivity also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE  
ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

The TE logo, TE Connectivity and Raychem are trademarks.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



TE Connectivity Wire & Cable  
501 Oakside Avenue  
Redwood City, CA 94063-3800  
Phone: 1-800-227-8816  
Fax: 1-650-361-6297

TABLE II. PERFORMANCE DETAILS

| PART NUMBER<br>1/ | BEND TESTING                                      |              |                                                   |              |
|-------------------|---------------------------------------------------|--------------|---------------------------------------------------|--------------|
|                   | MANDREL DIAMETER<br>(inch) (± 3%)                 |              | WEIGHT<br>(lb) (± 3%)                             |              |
|                   | IMMERSION,<br>LIFE CYCLE AND<br>ACCELERATED AGING | COLD<br>BEND | IMMERSION,<br>LIFE CYCLE AND<br>ACCELERATED AGING | COLD<br>BEND |
|                   |                                                   |              |                                                   |              |
| 55A0813-26-*      | .375                                              | 1.00         | .500                                              | 3.00         |
| 55A0813-24-*      | .500                                              | 1.00         | .750                                              | 3.00         |
| 55A0813-22-*      | .500                                              | 1.00         | 1.00                                              | 3.00         |
| 55A0813-20-*      | .500                                              | 1.00         | 1.50                                              | 4.00         |
| 55A0813-18-*      | .750                                              | 1.50         | 2.00                                              | 4.00         |
| 55A0813-16-*      | 1.00                                              | 1.50         | 2.00                                              | 5.00         |
| 55A0813-14-*      | 1.00                                              | 2.00         | 3.00                                              | 5.00         |
| 55A0813-12-*      | 1.50                                              | 2.00         | 3.00                                              | 5.00         |
| 55A0813-10-*      | 2.00                                              | 3.00         | 3.00                                              | 5.00         |
| 55A0813- 8-*      | 3.00                                              | 4.00         | 4.00                                              | 6.00         |
| 55A0813- 6-*      | 4.00                                              | 5.00         | 4.00                                              | 10.0         |
| 55A0813- 4-*      | 5.00                                              | 6.00         | 4.00                                              | 10.0         |
| 55A0813- 2-*      | 6.00                                              | 8.00         | 6.00                                              | 15.0         |
| 55A0813- 1-*      | 8.00                                              | 10.0         | 6.00                                              | 15.0         |
| 55A0813- 0-*      | 8.00                                              | 10.0         | 6.00                                              | 15.0         |
| 55A0813-00-*      | 10.0                                              | 12.0         | 8.00                                              | 20.0         |
| 55A0813-000-*     | 10.0                                              | 12.0         | 8.00                                              | 20.0         |
| 55A0813-0000-*    | 10.0                                              | 12.0         | 8.00                                              | 20.0         |

## WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

ACCELERATED AGING (CROSSLINKING PROOF): 300 ± 3°C for 7 hours

BLOCKING: 230 ± 3°C for 24 hours

COLOR: White preferred

CONCENTRICITY: 70% (minimum)

FLAMMABILITY: Procedure 1, 3 seconds (maximum); 3 inches (maximum); no flaming of facial tissue

HUMIDITY RESISTANCE: Insulation Resistance,

5000 megohms for 1000 ft. (minimum), AWG 26 - 10,

3000 megohms for 1000 ft. (minimum), AWG 8 - 0000

IDENTIFICATION, COLOR STRIPING AND BAND DURABILITY:

125 cycles (250 strokes) (minimum), 500 g weight

IMMERSION: Diameter increase 5% (maximum); no cracking, no dielectric breakdown

INSULATION ELONGATION AND TENSILE STRENGTH:

Tensile strength, 5000 lbf/in<sup>2</sup> (minimum) for primary insulation

5000 lbf/in<sup>2</sup> (minimum) for total insulation (primary insulation and jacket)

Elongation, 125% (minimum) for primary insulation, AWG 26 - 10 only

75% (minimum) for total insulation (primary insulation and jacket)

INSULATION FLAWS:

Primary Insulation,

Spark Test, 1.5 kV (rms) at 60 Hz

4.2 kV (rms) at 3 kHz

Impulse Dielectric Test, 6.0 kV (peak)

Finished Wire,

Spark Test, 5.7 kV (rms) at 3 kHz

Impulse Dielectric Test, 8.0 kV (peak)

INSULATION RESISTANCE:

5000 megohms for 1000 ft. (minimum), AWG 26 - 10

3000 megohms for 1000 ft. (minimum), AWG 8 - 0000

INSULATION THICKNESS: 0.003 in. (minimum) for primary insulation

0.004 in. (minimum) for outer jacket

0.009 in. (minimum) for total insulation

LIFE CYCLE: 230 ± 3°C for 500 hours

LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours

SHRINKAGE: 230 ± 3°C, for 6 hours, 0.125 in. (maximum) in 12 inches

SMOKE TEST: 250 ± 5°C, no visible smoke

SURFACE RESISTANCE: 500 megohms-in. (minimum), both readings

THERMAL SHOCK RESISTANCE: 200 ± 3°C,

0.060 in. (maximum), AWG 26 - 12

0.100 in. (maximum), AWG 10 - 8

0.125 in. (maximum), AWG 6 - 0000

VOLTAGE WITHSTAND TEST (Post Environmental): 2500 volts (rms), 60 Hz

WICKING: 2.25 in. (maximum)

WRAP TEST: 313 ± 3°C for 2 hours

PART NUMBER:

The "\*" in the part numbers on pages 1 and 2 shall be replaced by a color code designator.

1/ Example: AWG 22, white; 55A0813-22-9

AWG 22, white with a black stripe; 55A0813-22-90

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)