


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
GP	00		A	RELEASED PER ECO-12-013192	06NOV2012	BMM	MRS	
			A1	RELEASED PER ECO-13-014600	11SEP2013	PP	SH	
			A3	RELEASED PER ECO-15-006578	20APR2015	PP	SH	

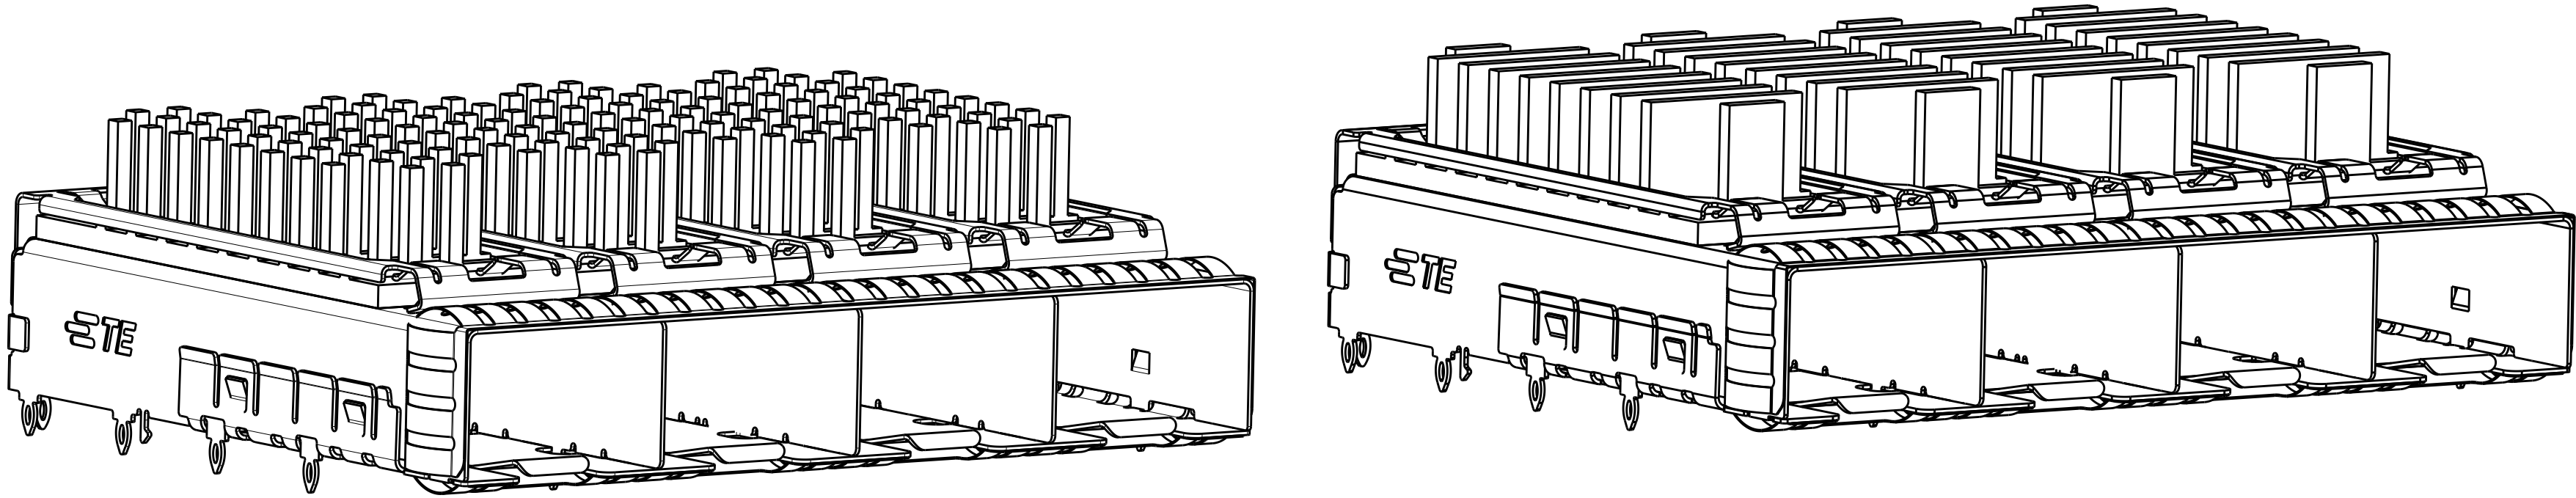

2149730-1,2,3,4,5
FINISHED ASSEMBLY WITH
PIN TYPE HEAT SINK

2149730-6,7,8,9,10
FINISHED ASSEMBLY WITH
FIN TYPE HEAT SINK

- 1

MATERIAL:
CAGE ASSEMBLY: 0.25mm THICK NICKEL SILVER ALLOY
HEATSINK CLIP: STAINLESS STEEL
HEATSINK: ALUMINUM
- 2

FINISH:
EMI SPRINGS: MINIMUM OF 0.8um TIN PLATE OVER A MINIMUM OF 0.8um NICKEL UNDERPLATE.
NON-PLATED EDGES PERMISSIBLE.
HEATSINK: ELECTROLESS NICKEL
HEATSINK CLIP: PASSIVATE
- 3

PADS AND VIAS CHASSIS GROUND.
- 4

DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- 5

MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.
- 6

INTERPRETATION OF DATUM REFERENCE FRAME IN ACCORDANCE WITH SECT 4.4.1.1 OF ASME Y14.5M-1994.
- 7

REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 8

REFERENCE APPLICATION SPEC. 114-13120, HOLE B, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 9


HOLE PATTERN REPEATS FOR EACH PORT. SPACING BETWEEN PORTS IS 14.25mm.
- 10

MINIMUM PC BOARD THICKNESS:
SINGLE SIDED = 1.50mm
DOUBLE SIDED = 2.25mm
- 11

CERTAIN MATING TRANSCEIVERS MAY REQUIRE ADDITIONAL PCB THICKNESS THAT WOULD BE DETERMINED BY THE CUSTOMER.
- 12

PRODUCT COMPLIES WITH SPECIFICATION SFF-8433 IMPROVED PLUGGABLE FROM FACTOR FOR SFP+ GANGED CAGES.


13 DIMENSION APPLIES PRIOR TO INSERTION OF SFP MODULE

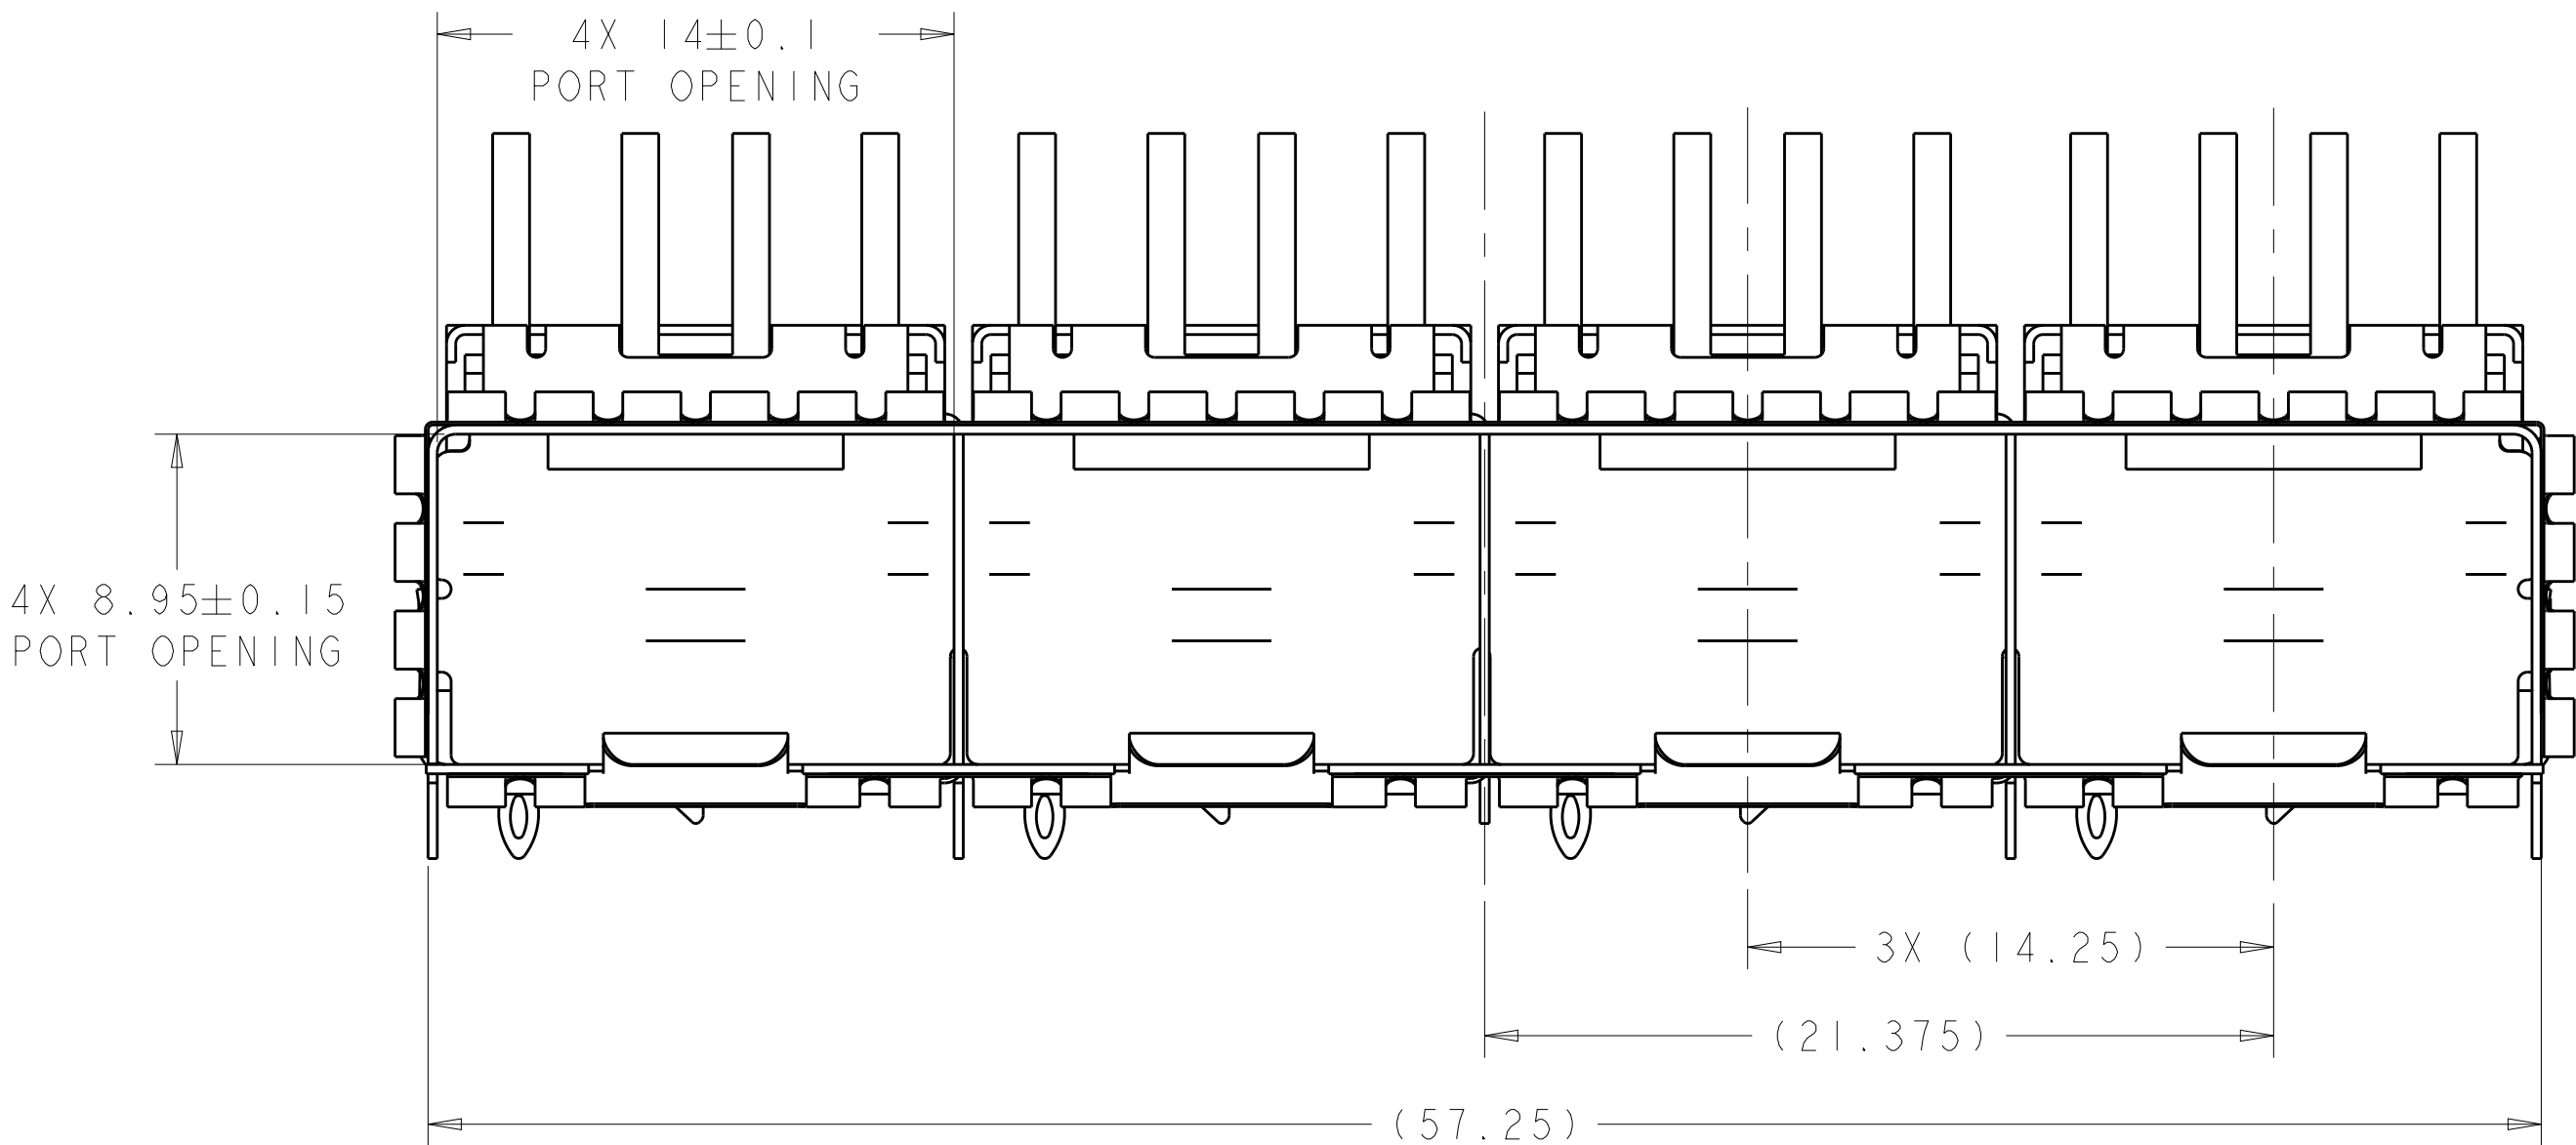


FIN TYPE	W/ INSULATING TAPE	22.5	NETWORKING, TALL	2149730-10
FIN TYPE	W/O INSULATING TAPE	22.5	NETWORKING, TALL	2149730-9
FIN TYPE	W/O INSULATING TAPE	15.5	SAN	2149730-8
FIN TYPE	W/O INSULATING TAPE	13.2	PCI	2149730-7
FIN TYPE	W/O INSULATING TAPE	18.1	NETWORKING, SHORT	2149730-6
PIN TYPE	W/ INSULATING TAPE	22.5	NETWORKING, TALL	2149730-5
PIN TYPE	W/O INSULATING TAPE	22.5	NETWORKING, TALL	2149730-4
PIN TYPE	W/O INSULATING TAPE	15.5	SAN	2149730-3
PIN TYPE	W/O INSULATING TAPE	13.2	PCI	2149730-2
PIN TYPE	W/O INSULATING TAPE	18.1	NETWORKING, SHORT	2149730-1
HEAT SINK TYPE	DESCRIPTION	A MAX	APPLICATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SCHMITT 23AUG2010	 TE Connectivity	
DIMENSIONS:		CHK M. SCHMITT 23AUG2010		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD B. WERTZ 23AUG2010	NAME	
		PRODUCT SPEC	SFP+ ENHANCED 1X4 CAGE ASSEMBLY	
	0 PLC ±0.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ±0.1 ANGLES ±1°	108-2364	PRESS FIT, EXTERNAL EMI SPRINGS	
		APPLICATION SPEC	WITH HEATSINK	
MATERIAL	FINISH	114-13120	SIZE	
		WEIGHT	CAGE CODE DRAWING NO	
		Customer Drawing	A100779C=2149730	
		Customer Drawing	RESTRICTED TO	
SCALE 5:1		SHEET 1 OF 7	REV A3	


2149730-1,2,3,4,5
MOUNTED BELLY TO BELLY ON PCB
SCALE 4:1

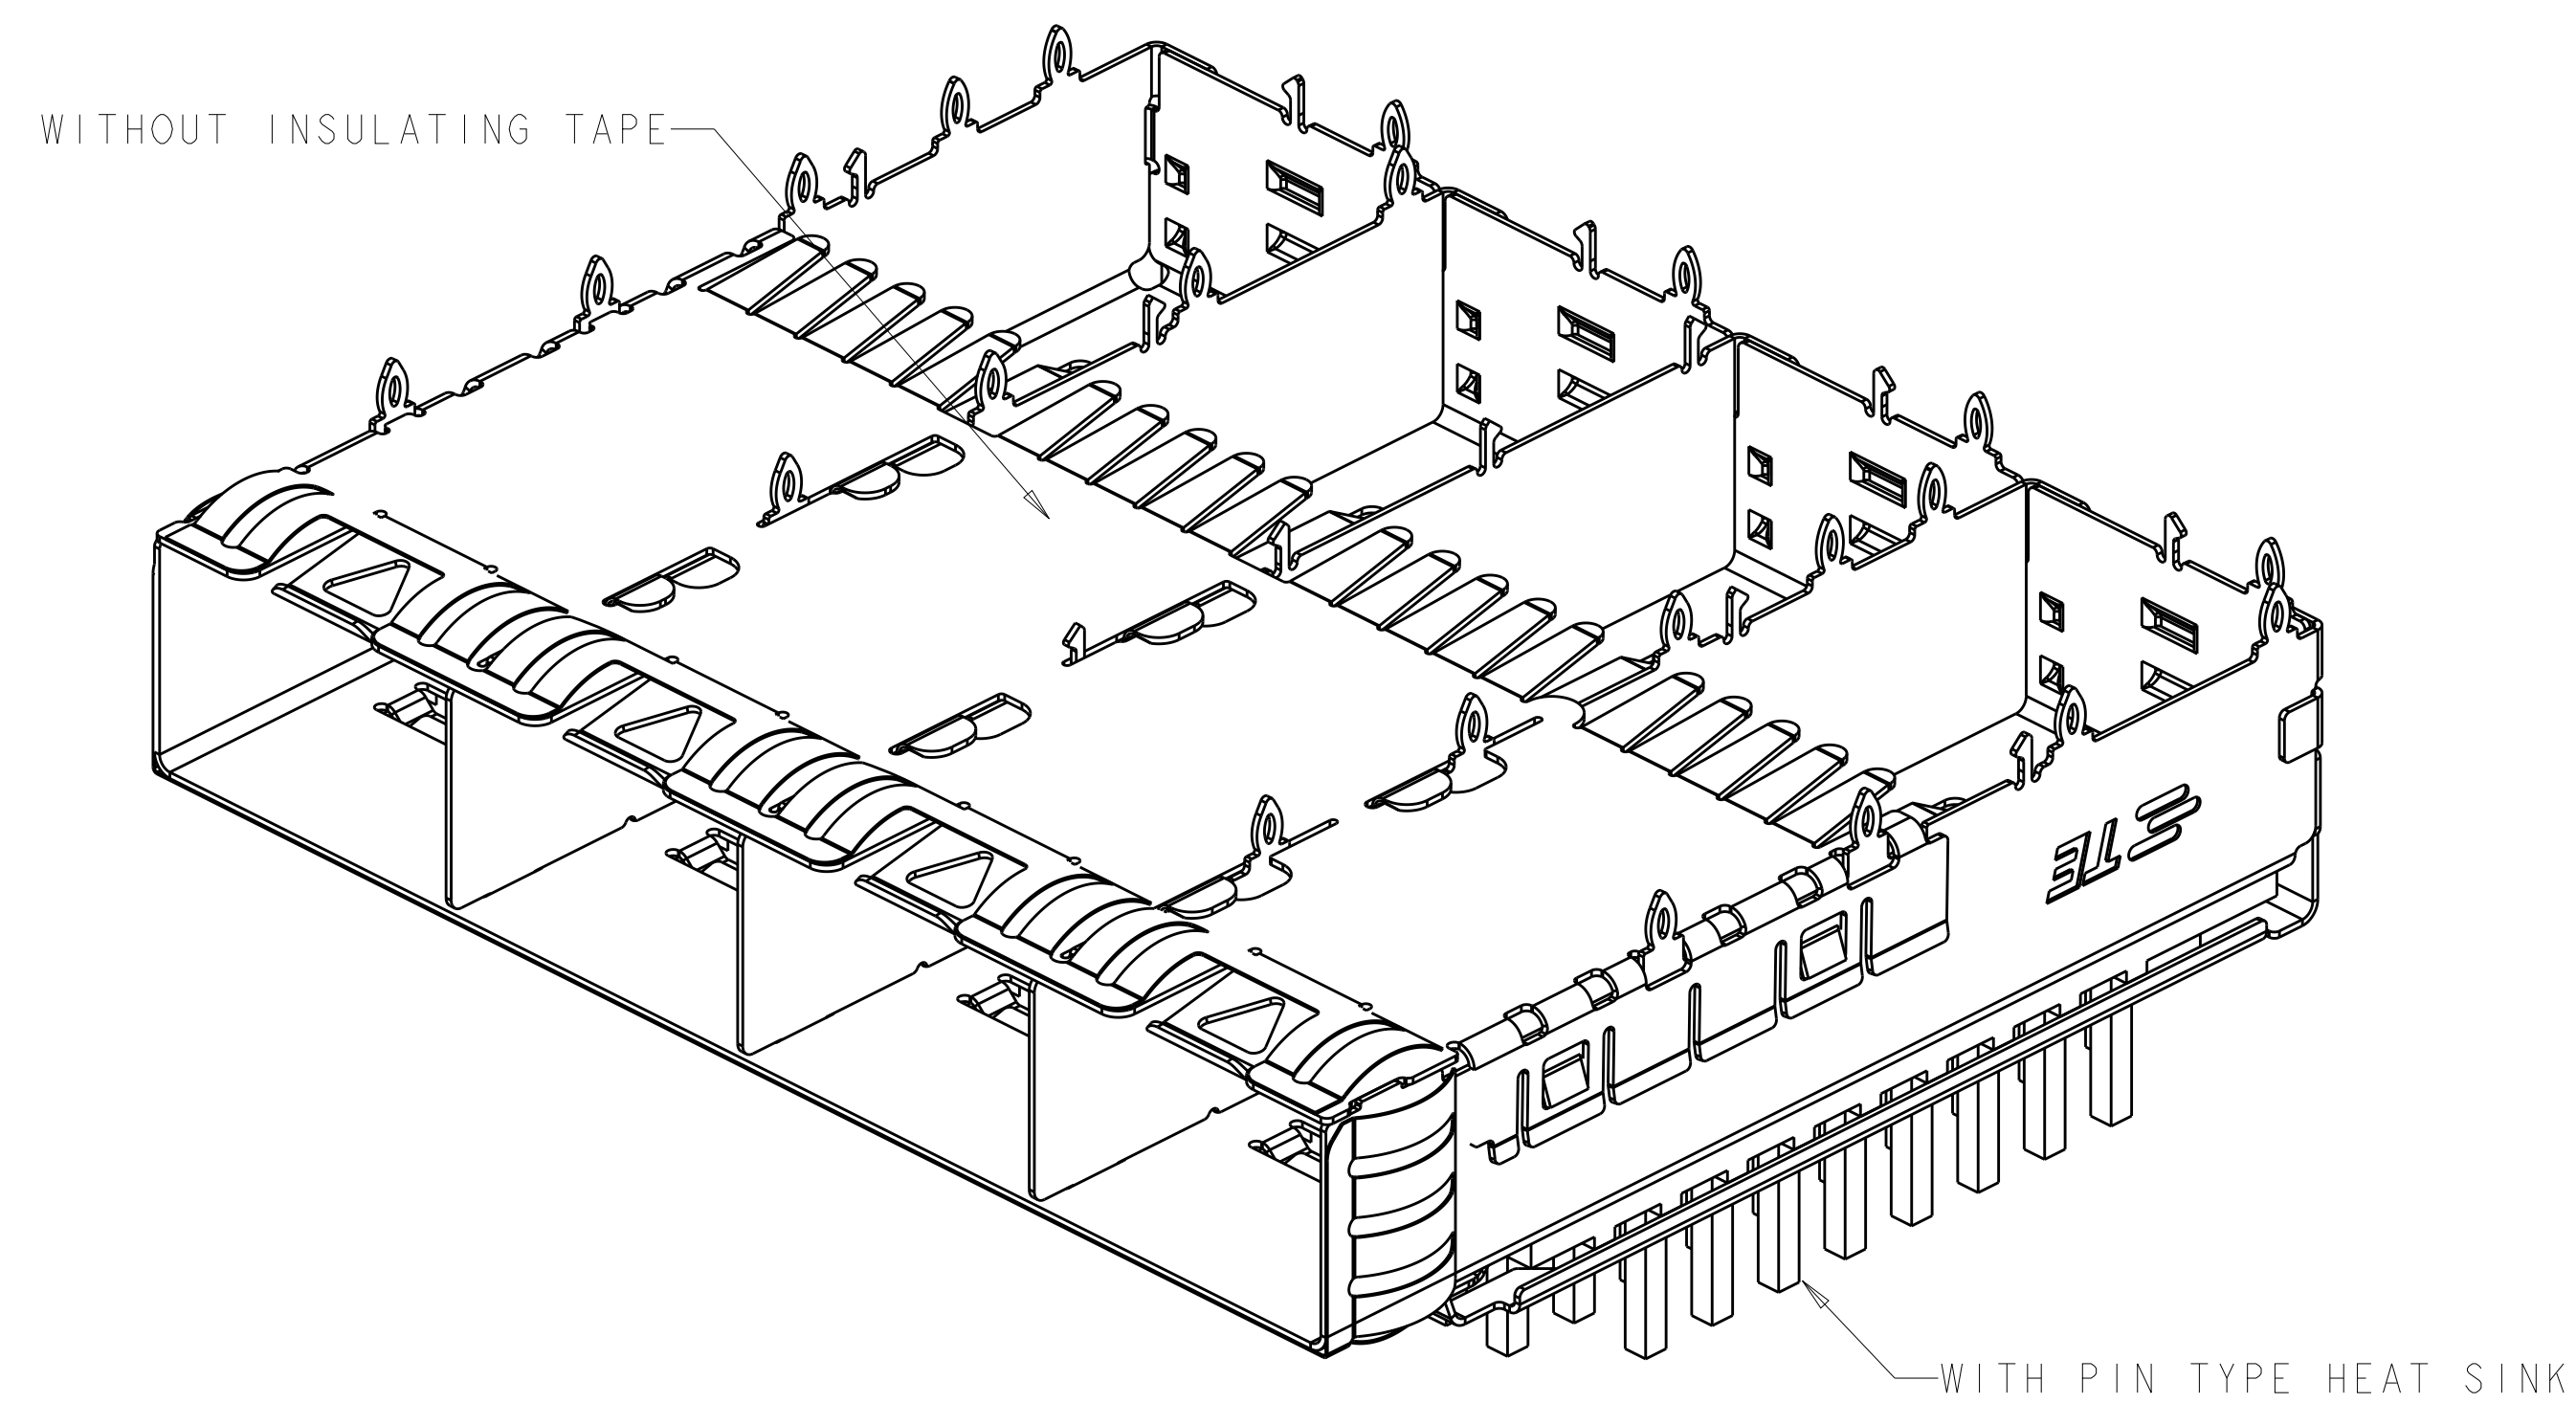





2149730-1,2,3,4 AS SHOWN WITHOUT INSULATING TAPE,WITH PIN TYPE HEAT SINK

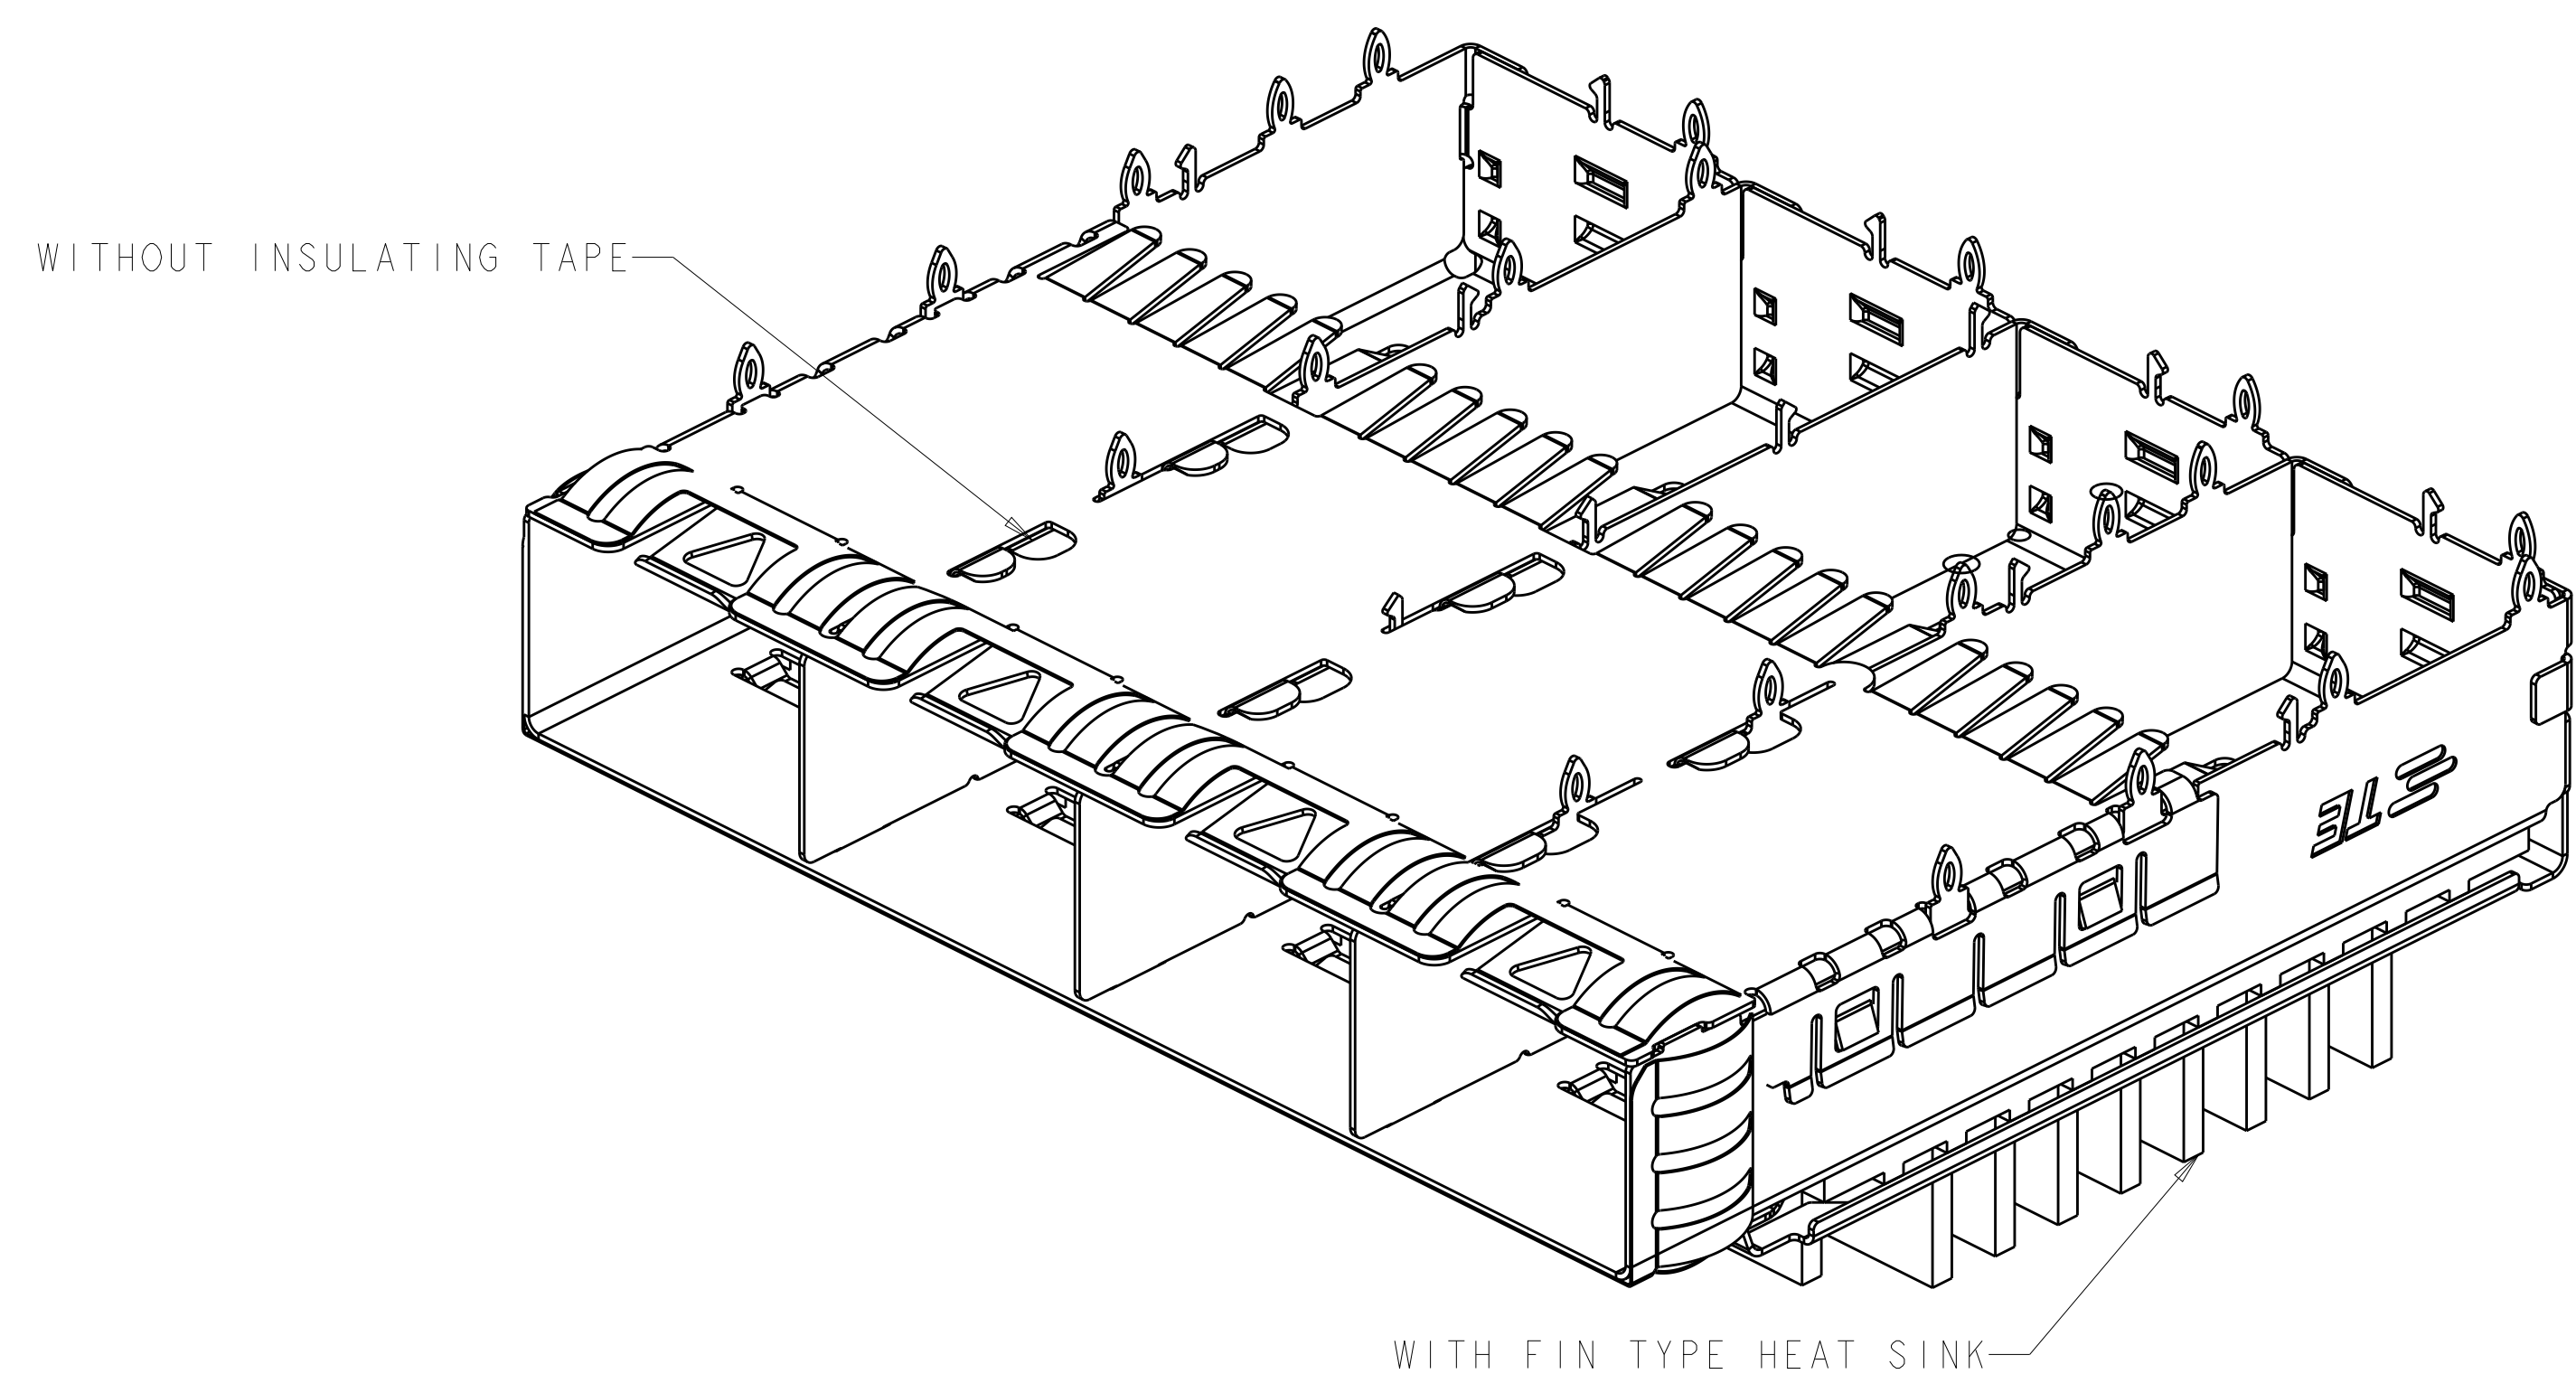


2149730-6,7,8,9 AS SHOWN WITHOUT INSULATING TAPE,WITH FIN TYPE HEAT SINK


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23AUG2010 CHK M SCHMITT 23AUG2010 CHK M SCHMITT 23AUG2010		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ±0.1 ANGLES ±1°0'		NAME SFP+ ENHANCED 1X4 GAGE ASSEMBLY PRESS FIT, EXTERNAL EMI SPRINGS WITH HEATSINK	
		APVD B_WERTZ 23AUG2010 PRODUCT SPEC 108-2364 APPLICATION SPEC 114-13120		SIZE A1	
MATERIAL		FINISH		CAGE CODE 100779	
WEIGHT		DRAWING NO		RESTRICTED TO -	
Customer Drawing		SCALE		SHEET 2 OF 7 REV A3	


LOC		DIST		REVISIONS			
GP				P	LYR	DESCRIPTION	DATE
				-		SEE SHEET 1	-

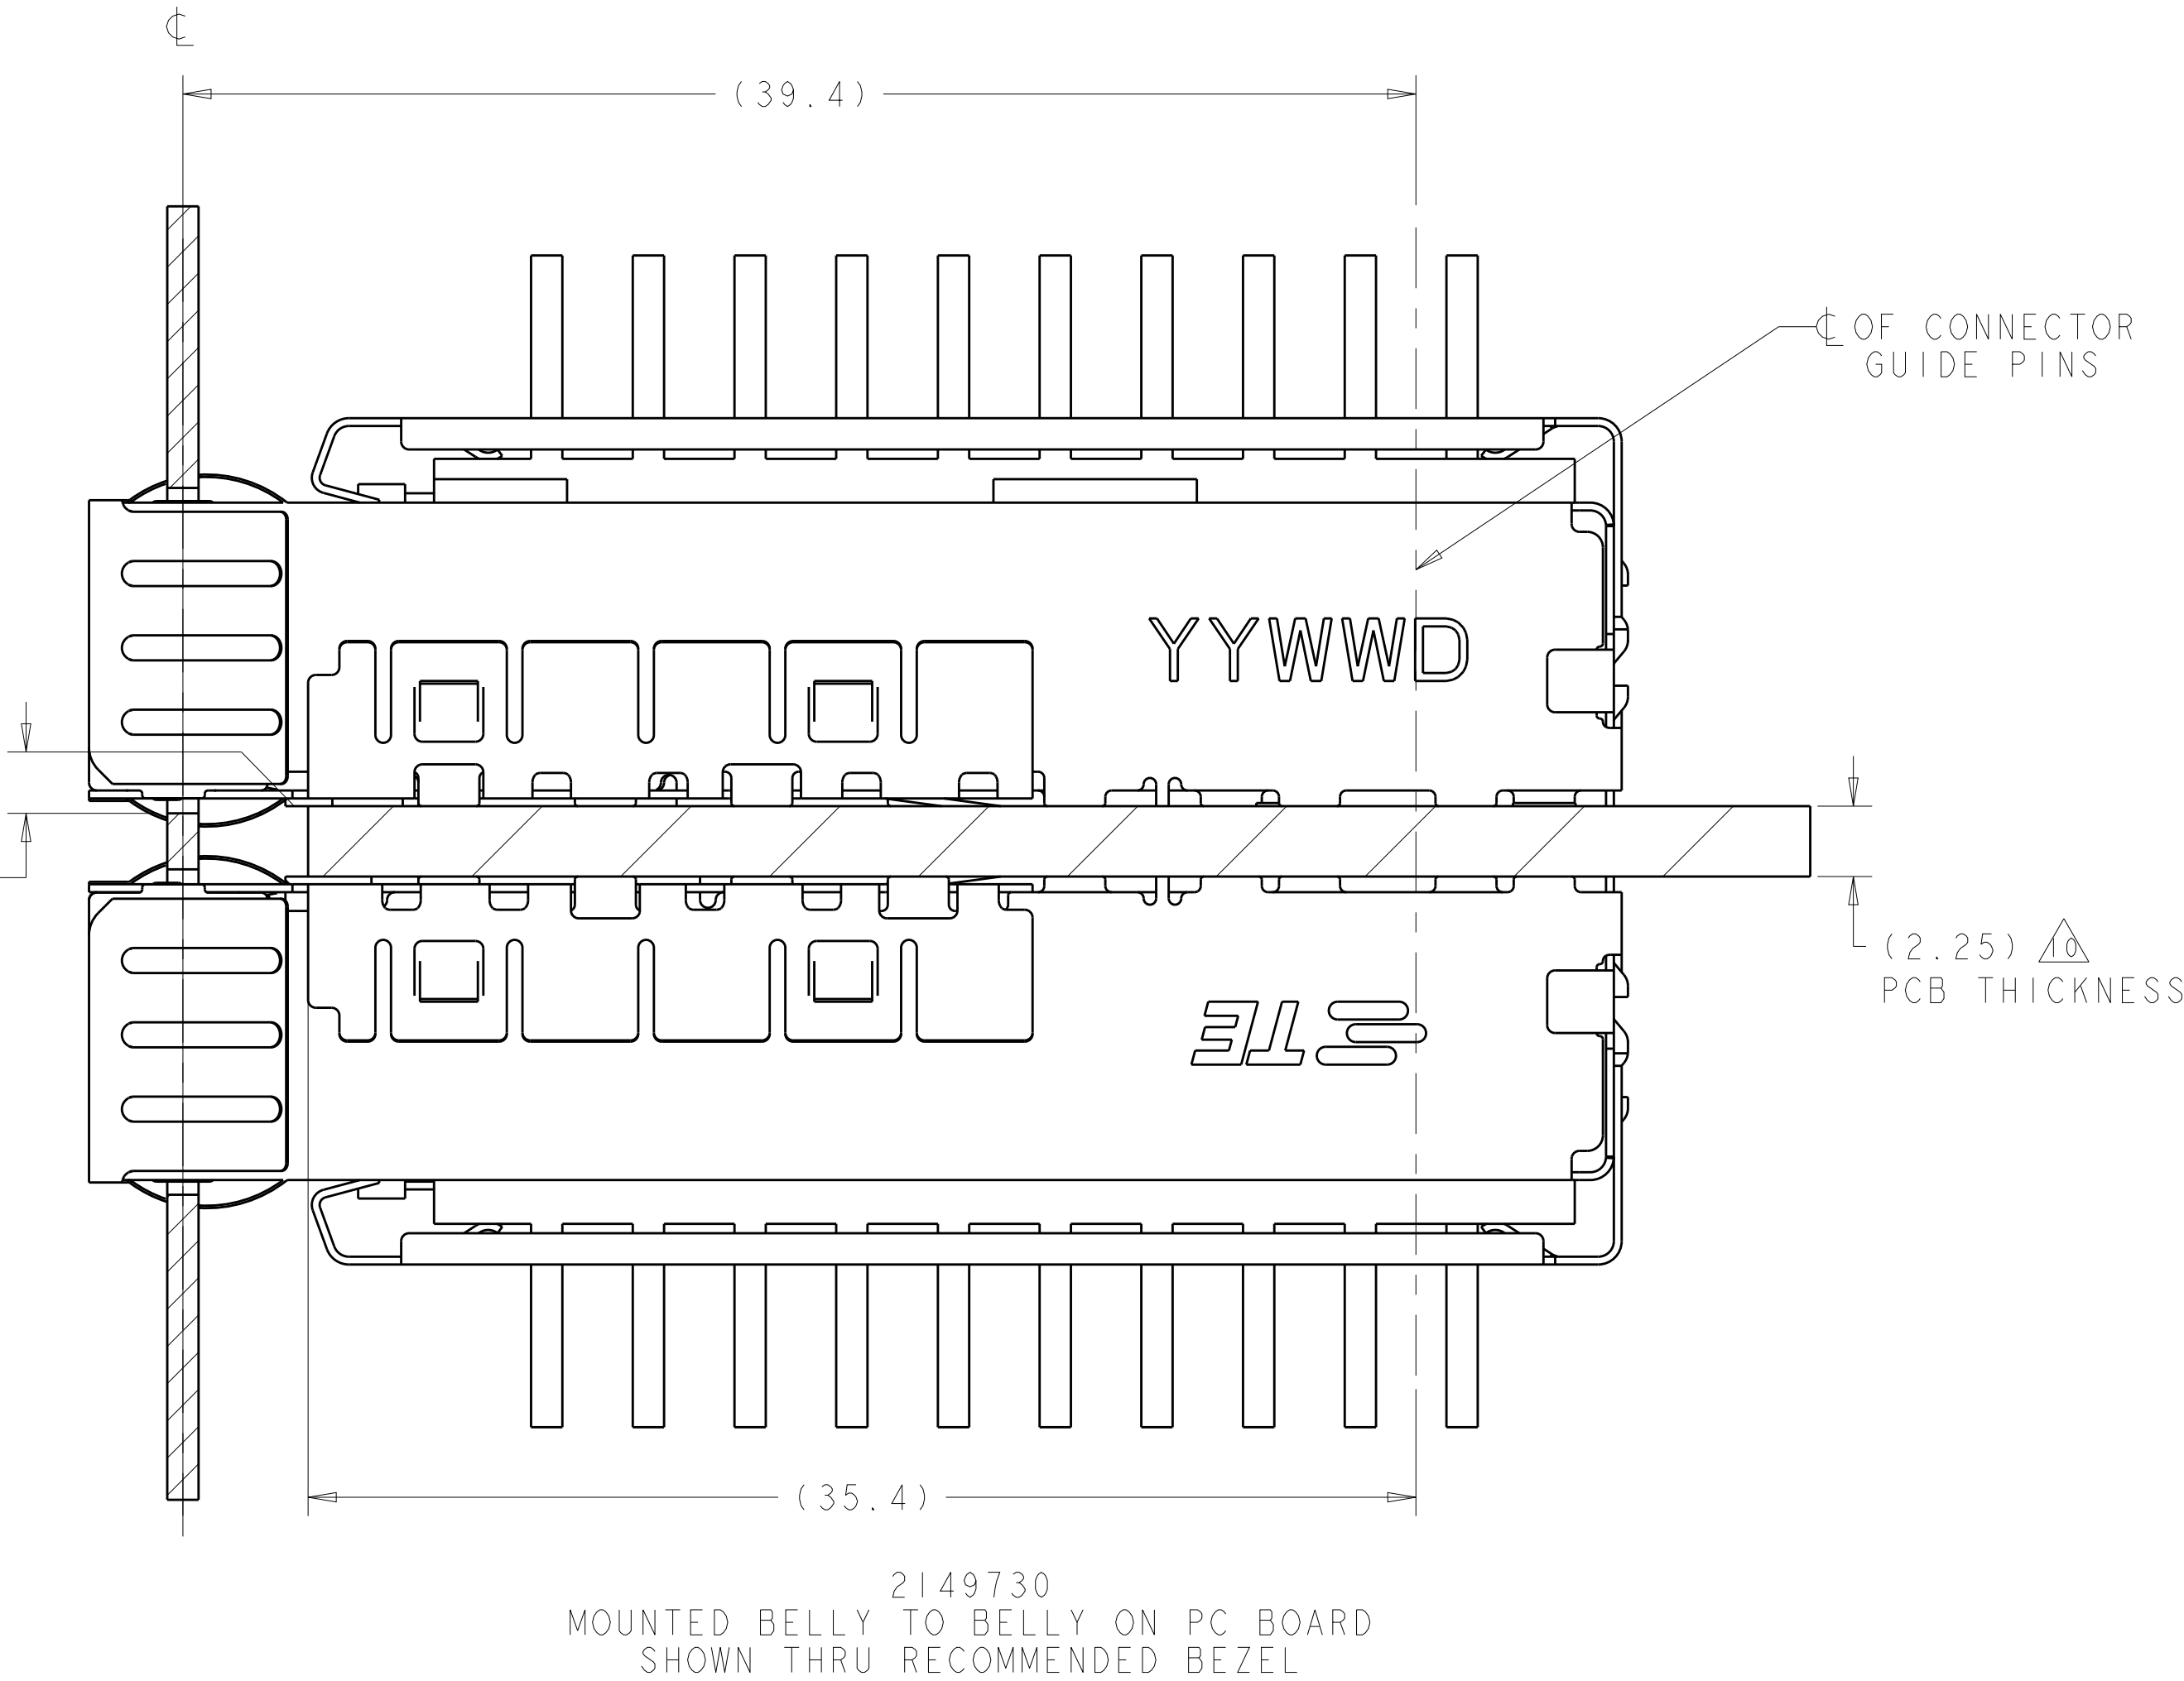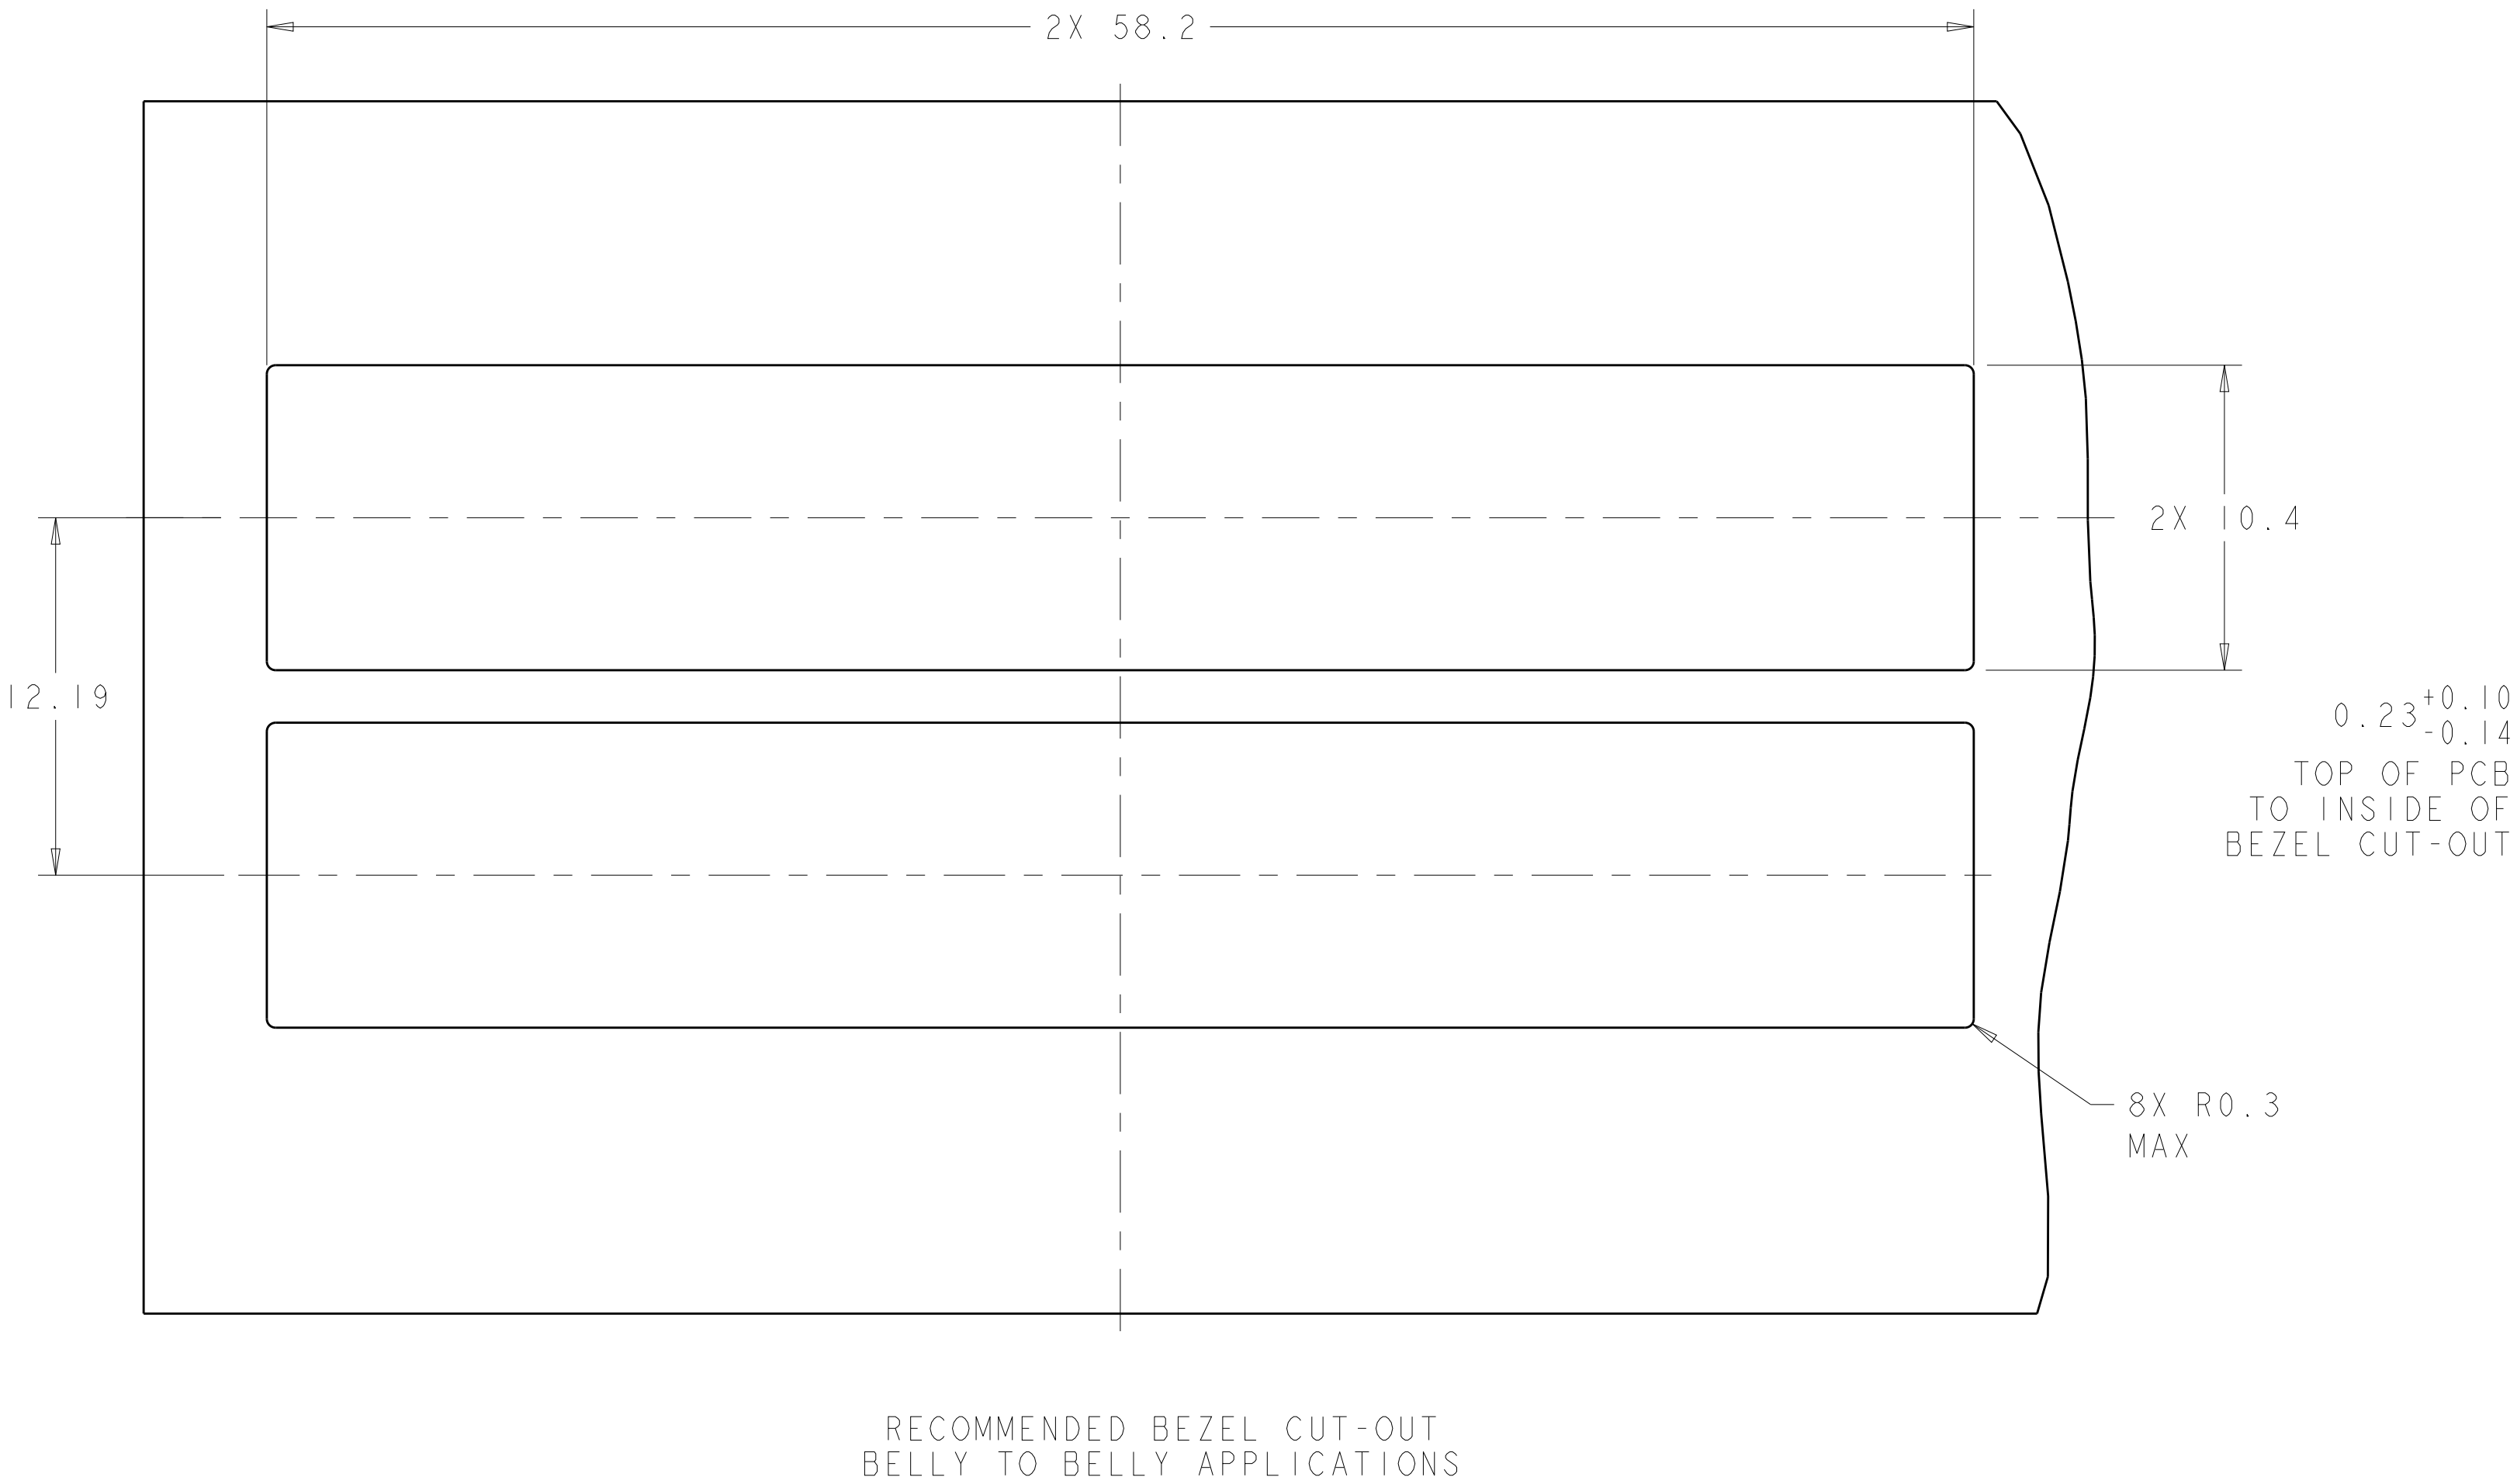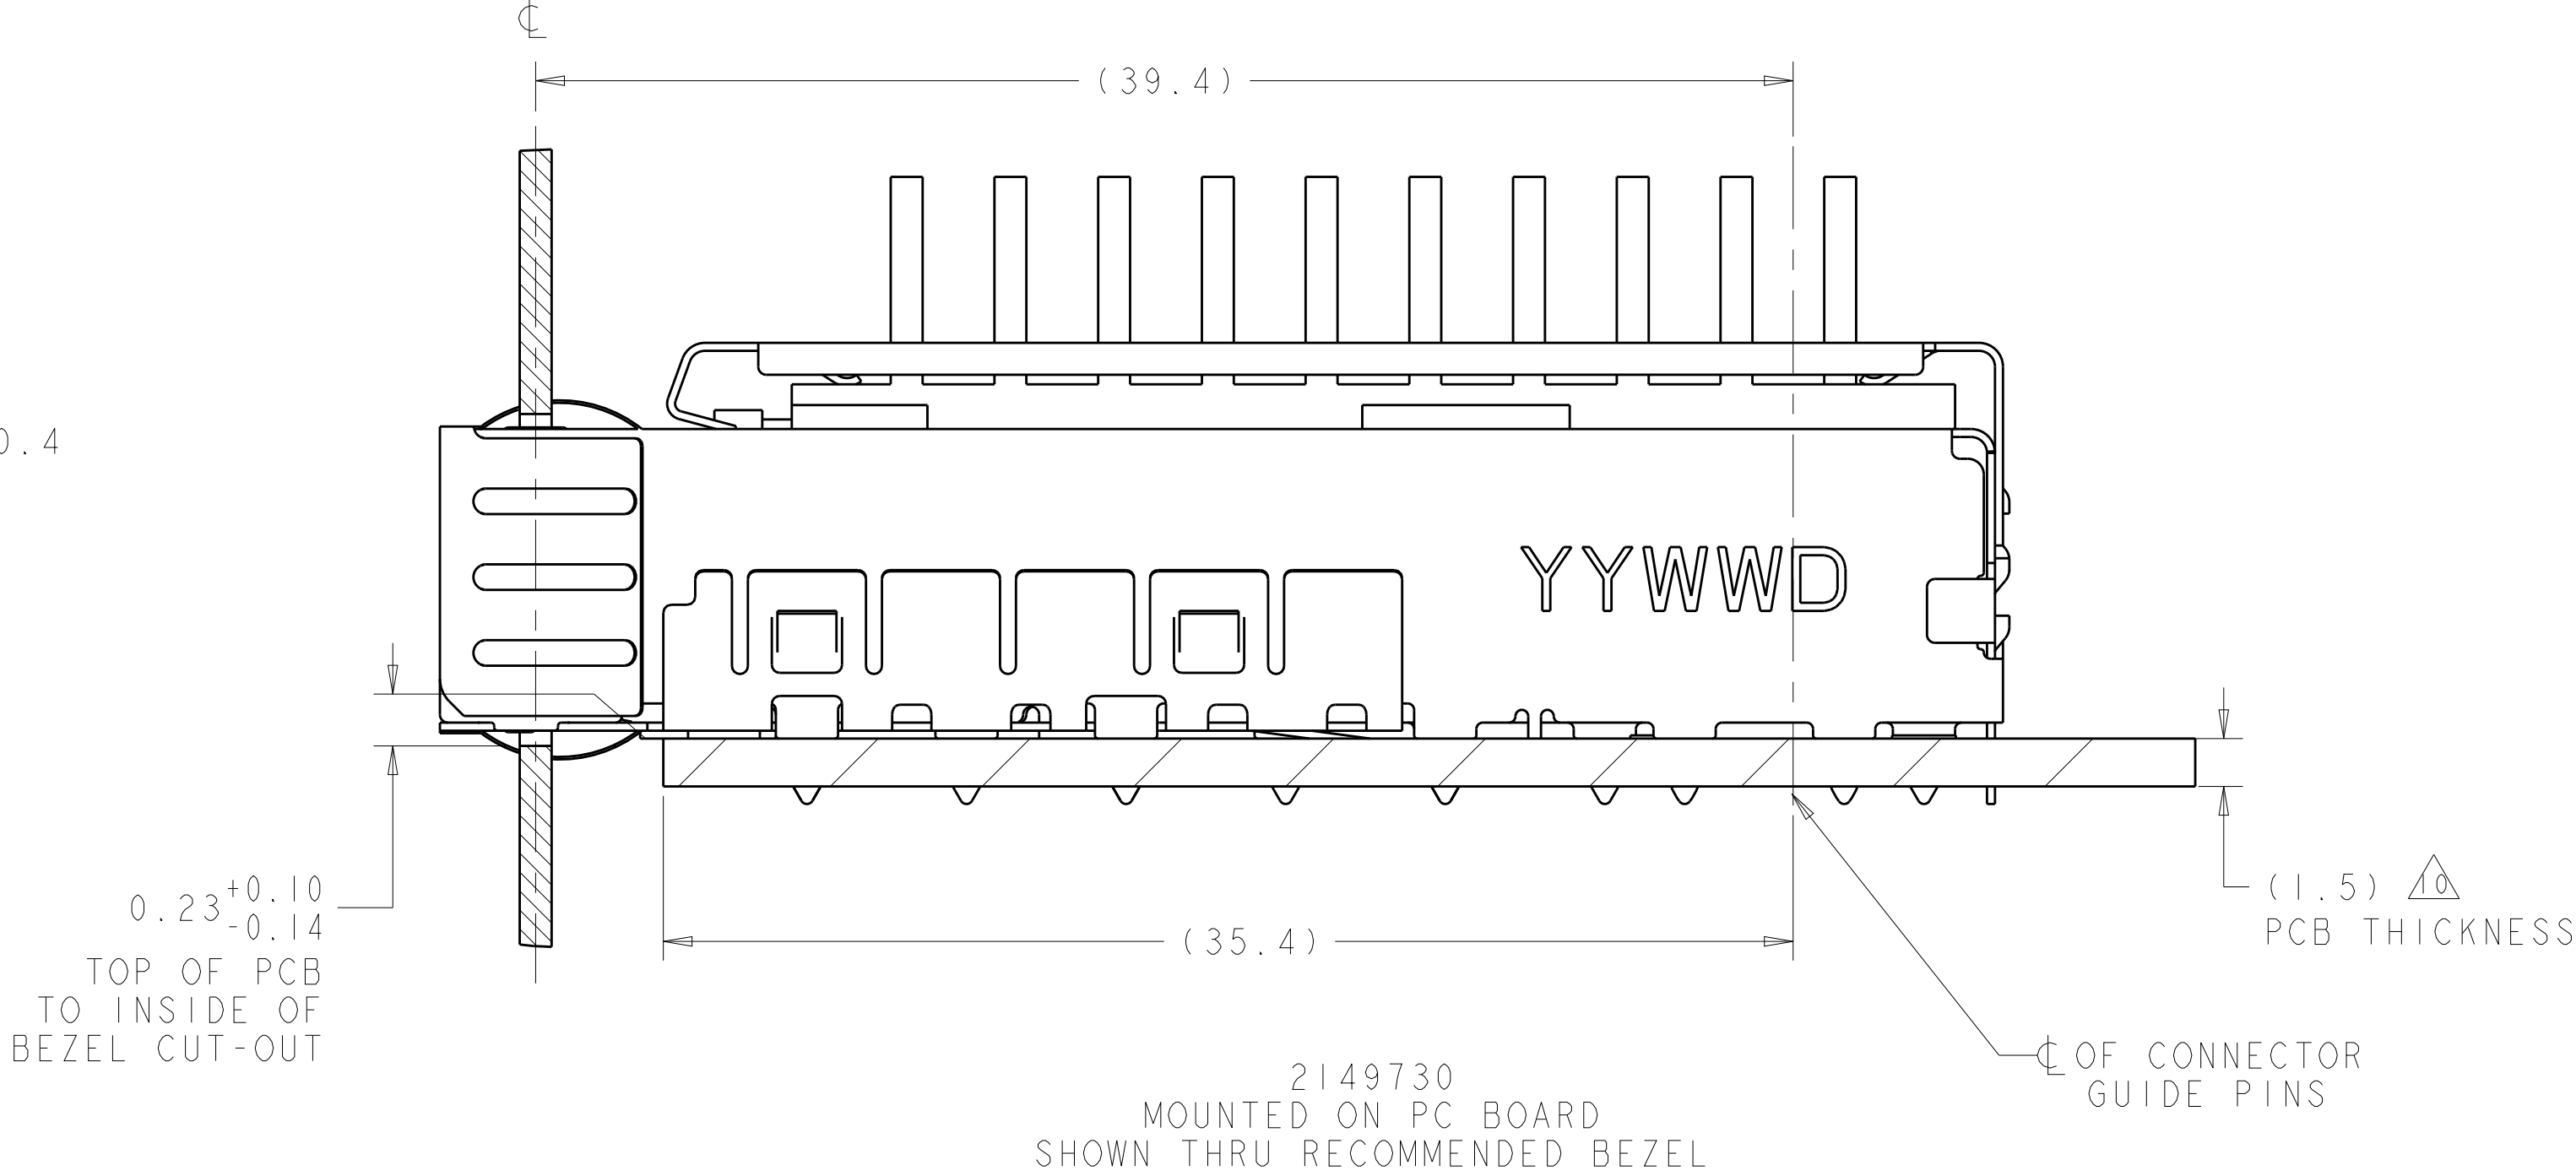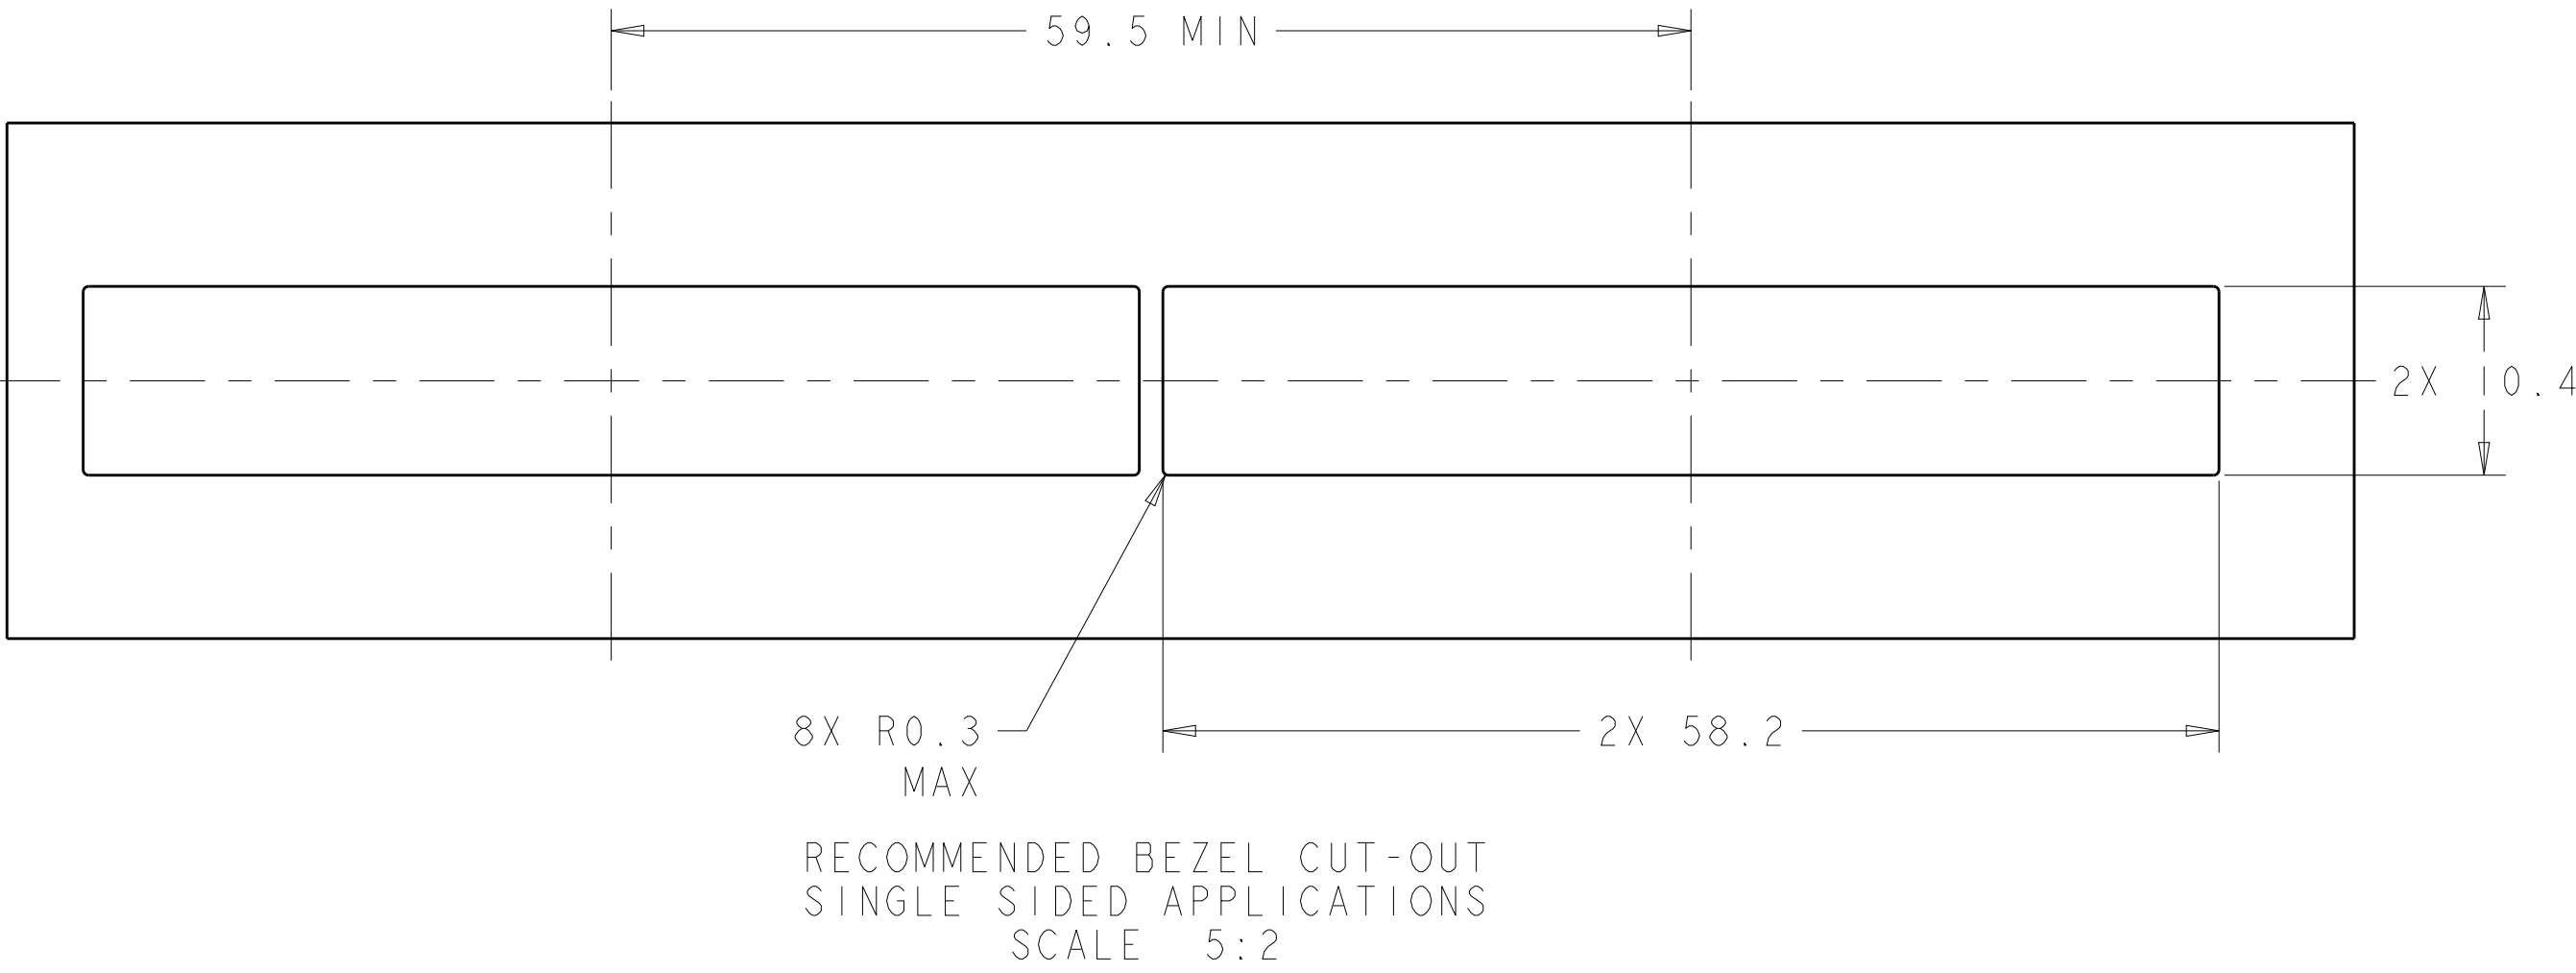


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SCHMITT 23AUG2010	TE Connectivity
DIMENSIONS:		CHK M. SCHMITT 23AUG2010	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD B. WERTZ 23AUG2010	NAME SFP+ ENHANCED 1X4 CAGE ASSEMBLY PRESS FIT, EXTERNAL EMI SPRINGS WITH HEATSINK
	0 PLC ±0.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ±0.1	PRODUCT SPEC 108-2364	SIZE CAGE CODE DRAWING NO. RESTRICTED TO
MATERIAL	ANGLES ±1° FINISH	APPLICATION SPEC 114-13120	A100779C=2149730
		WEIGHT -	SCALE 5:1 SHEET 3 OF 7 REV A3
Customer Drawing			

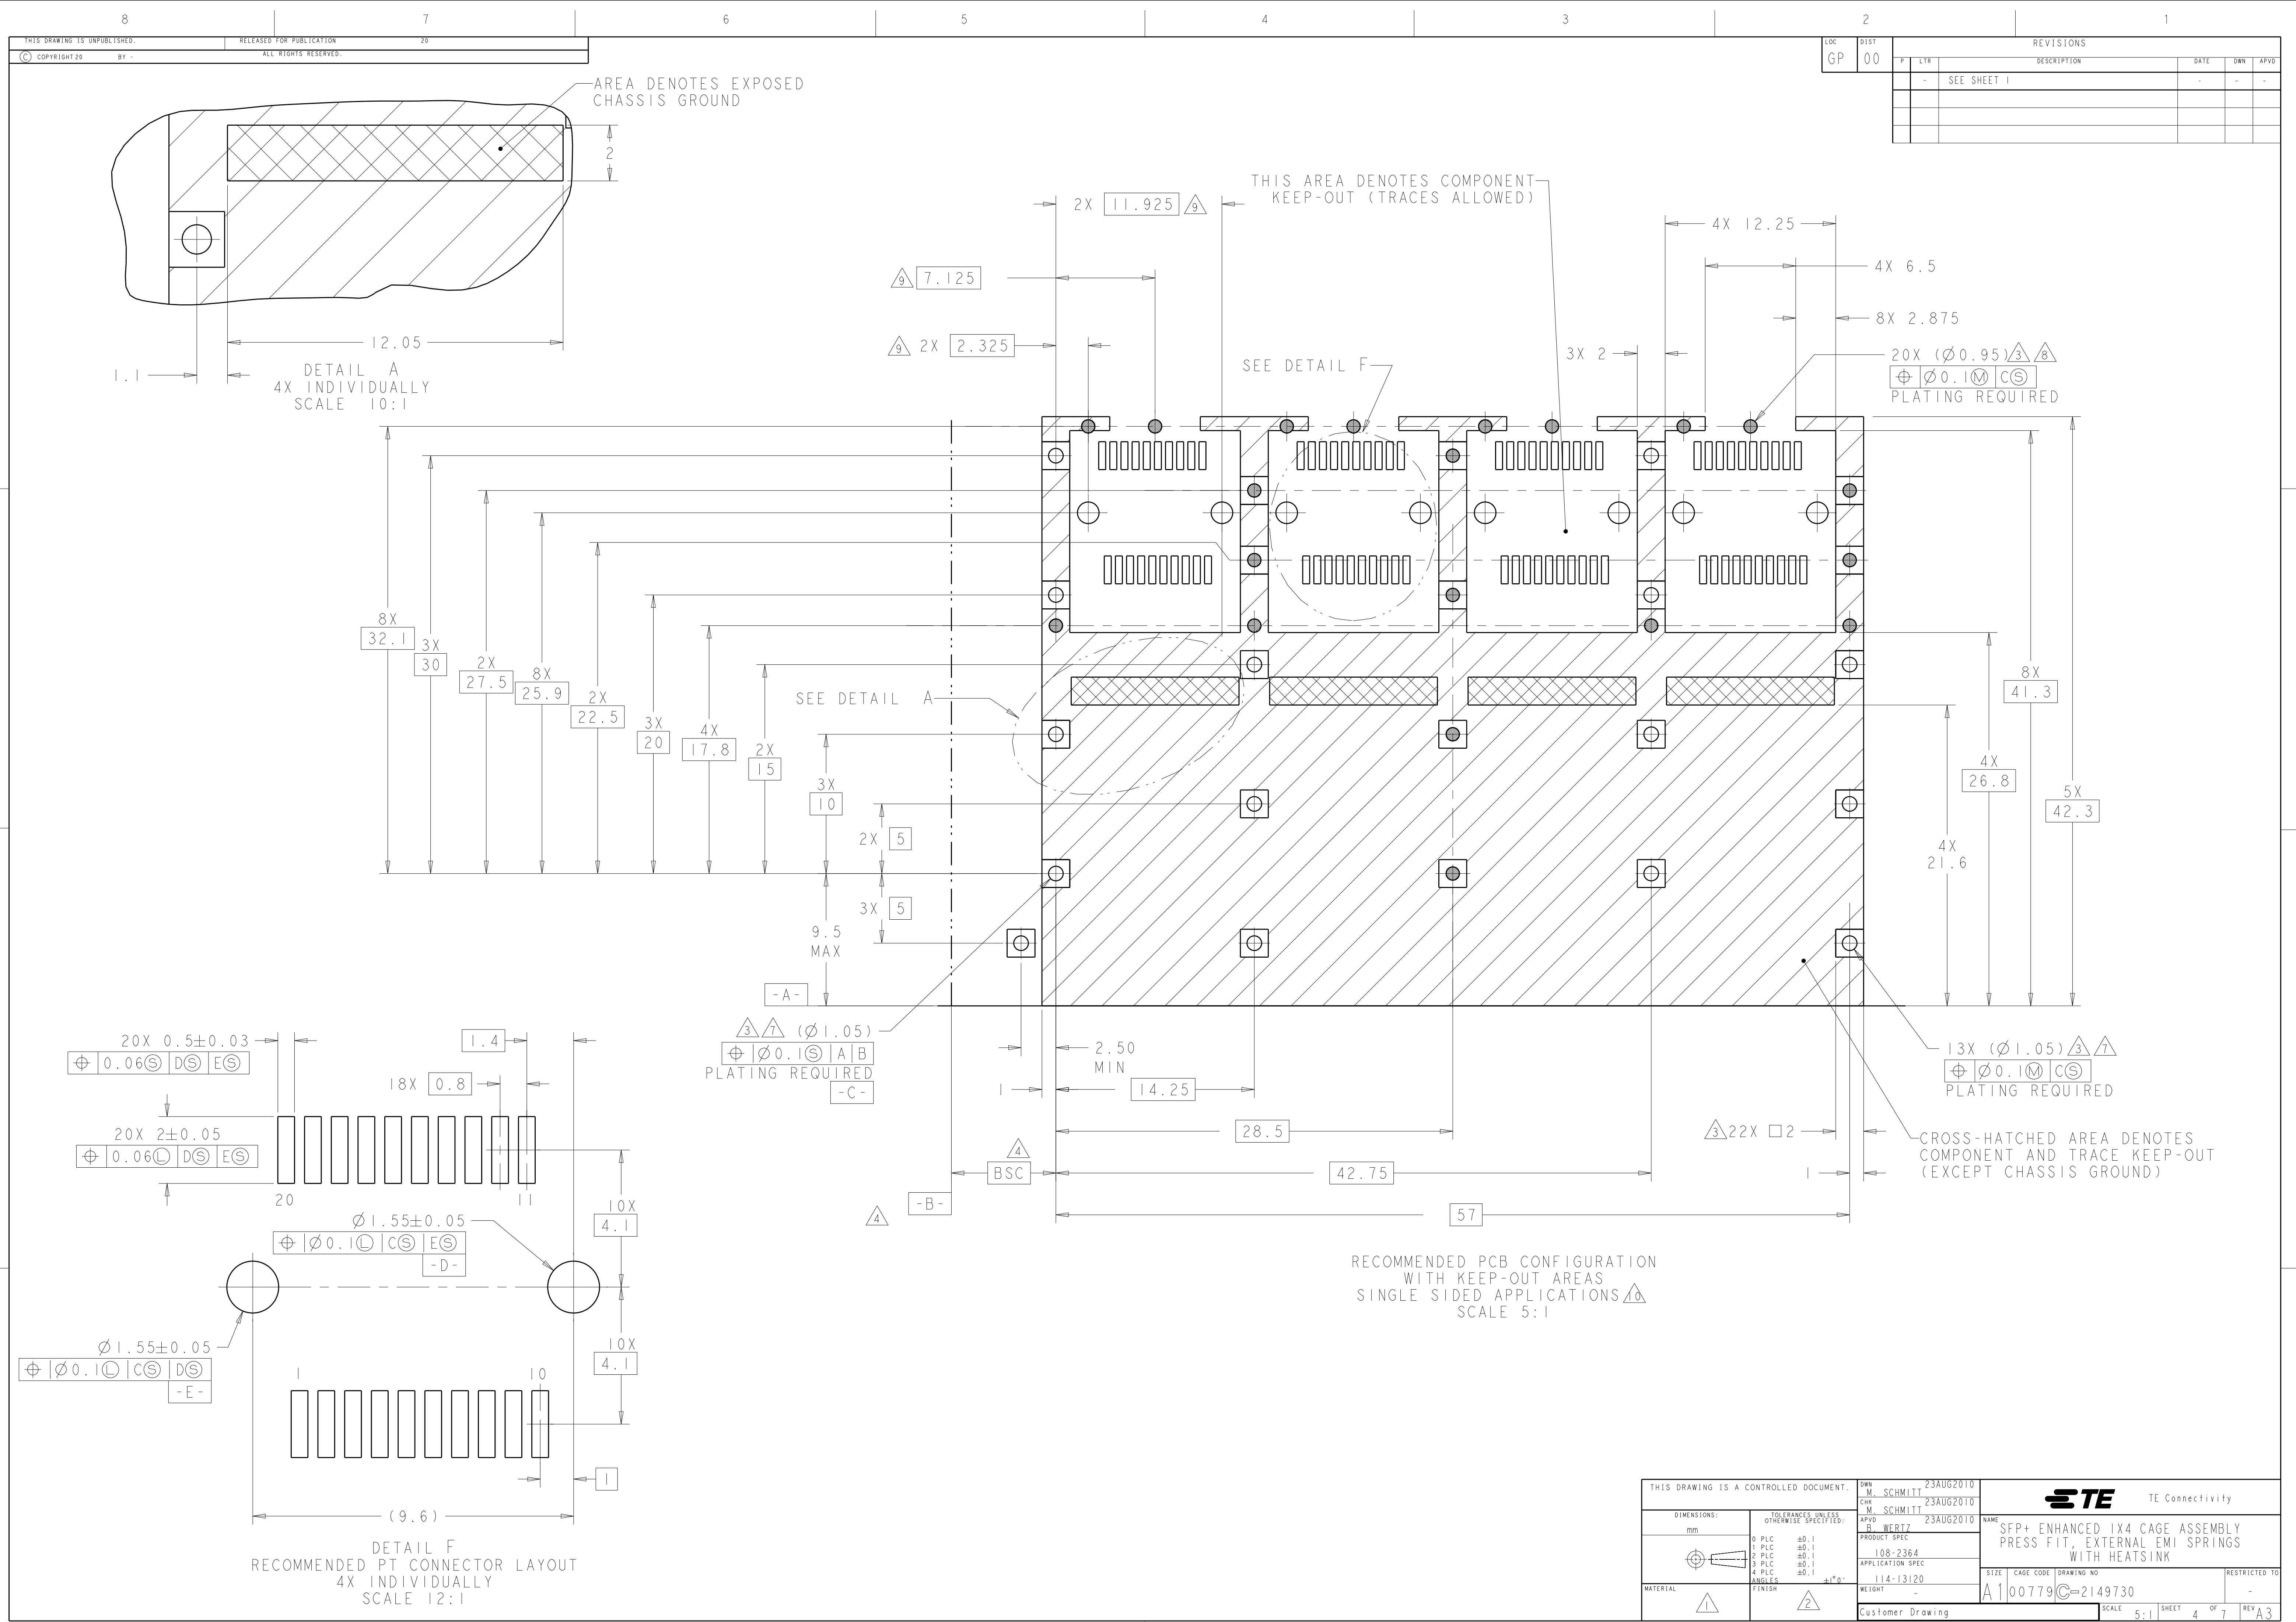

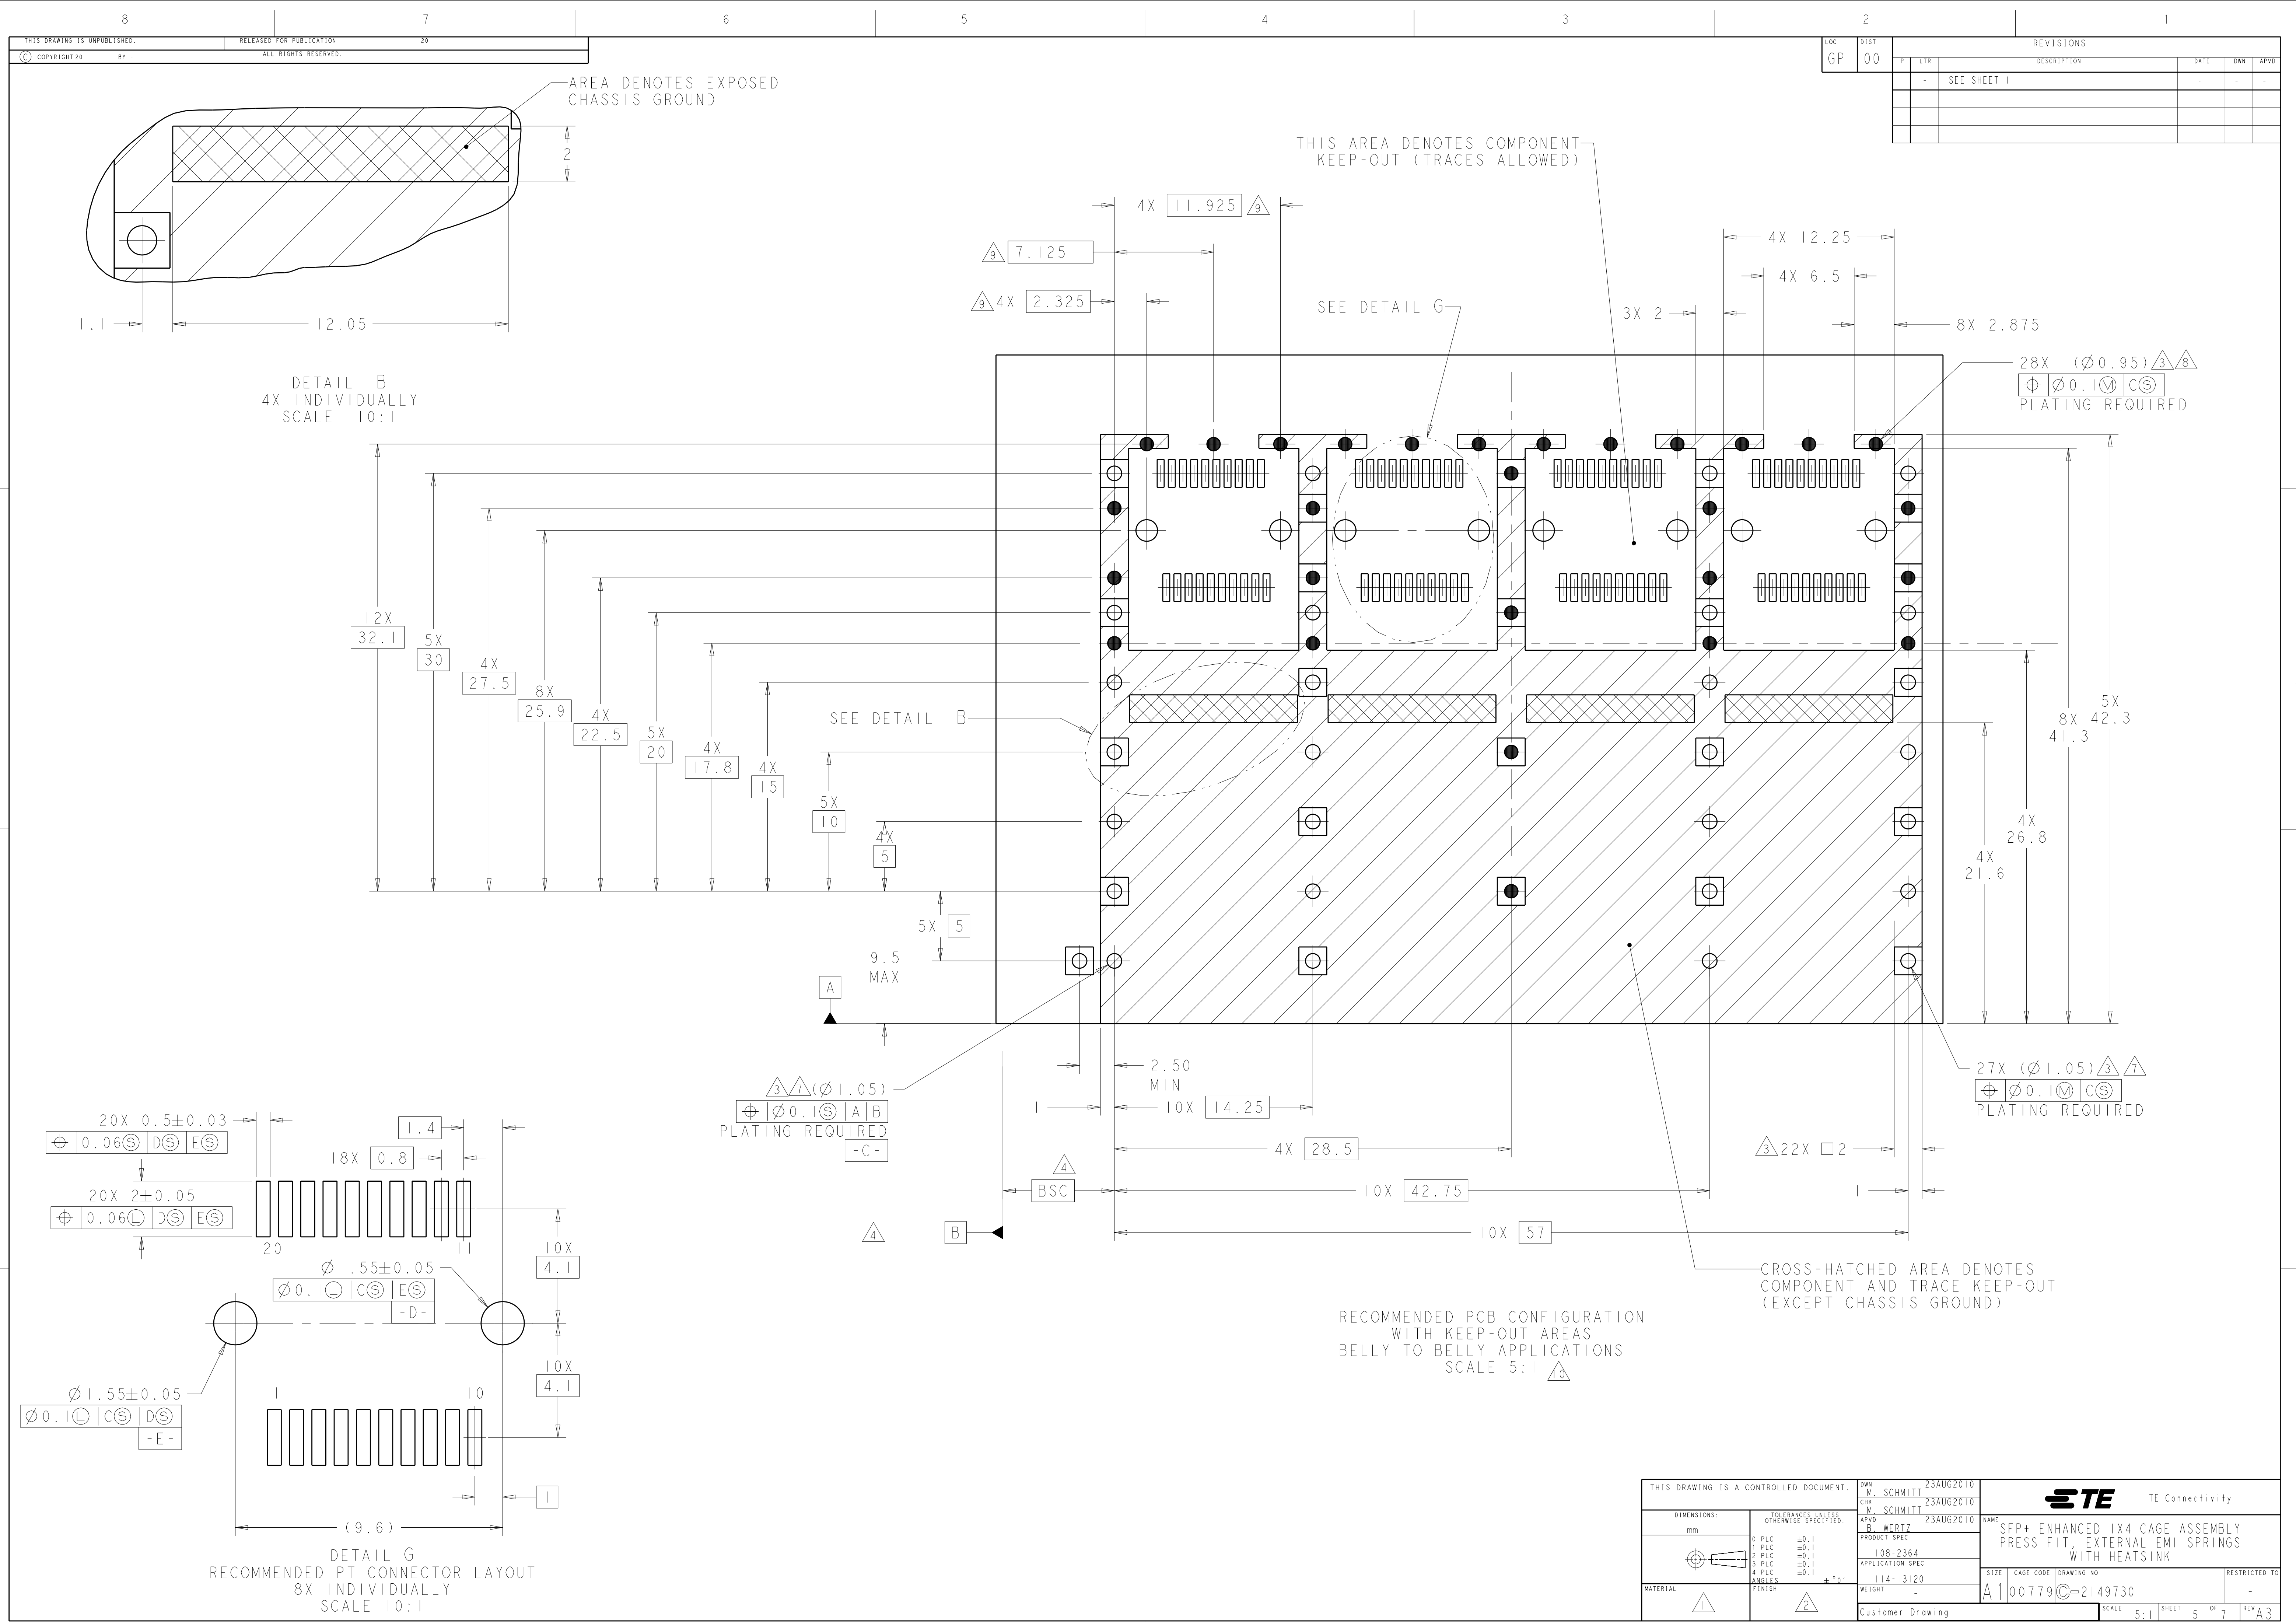

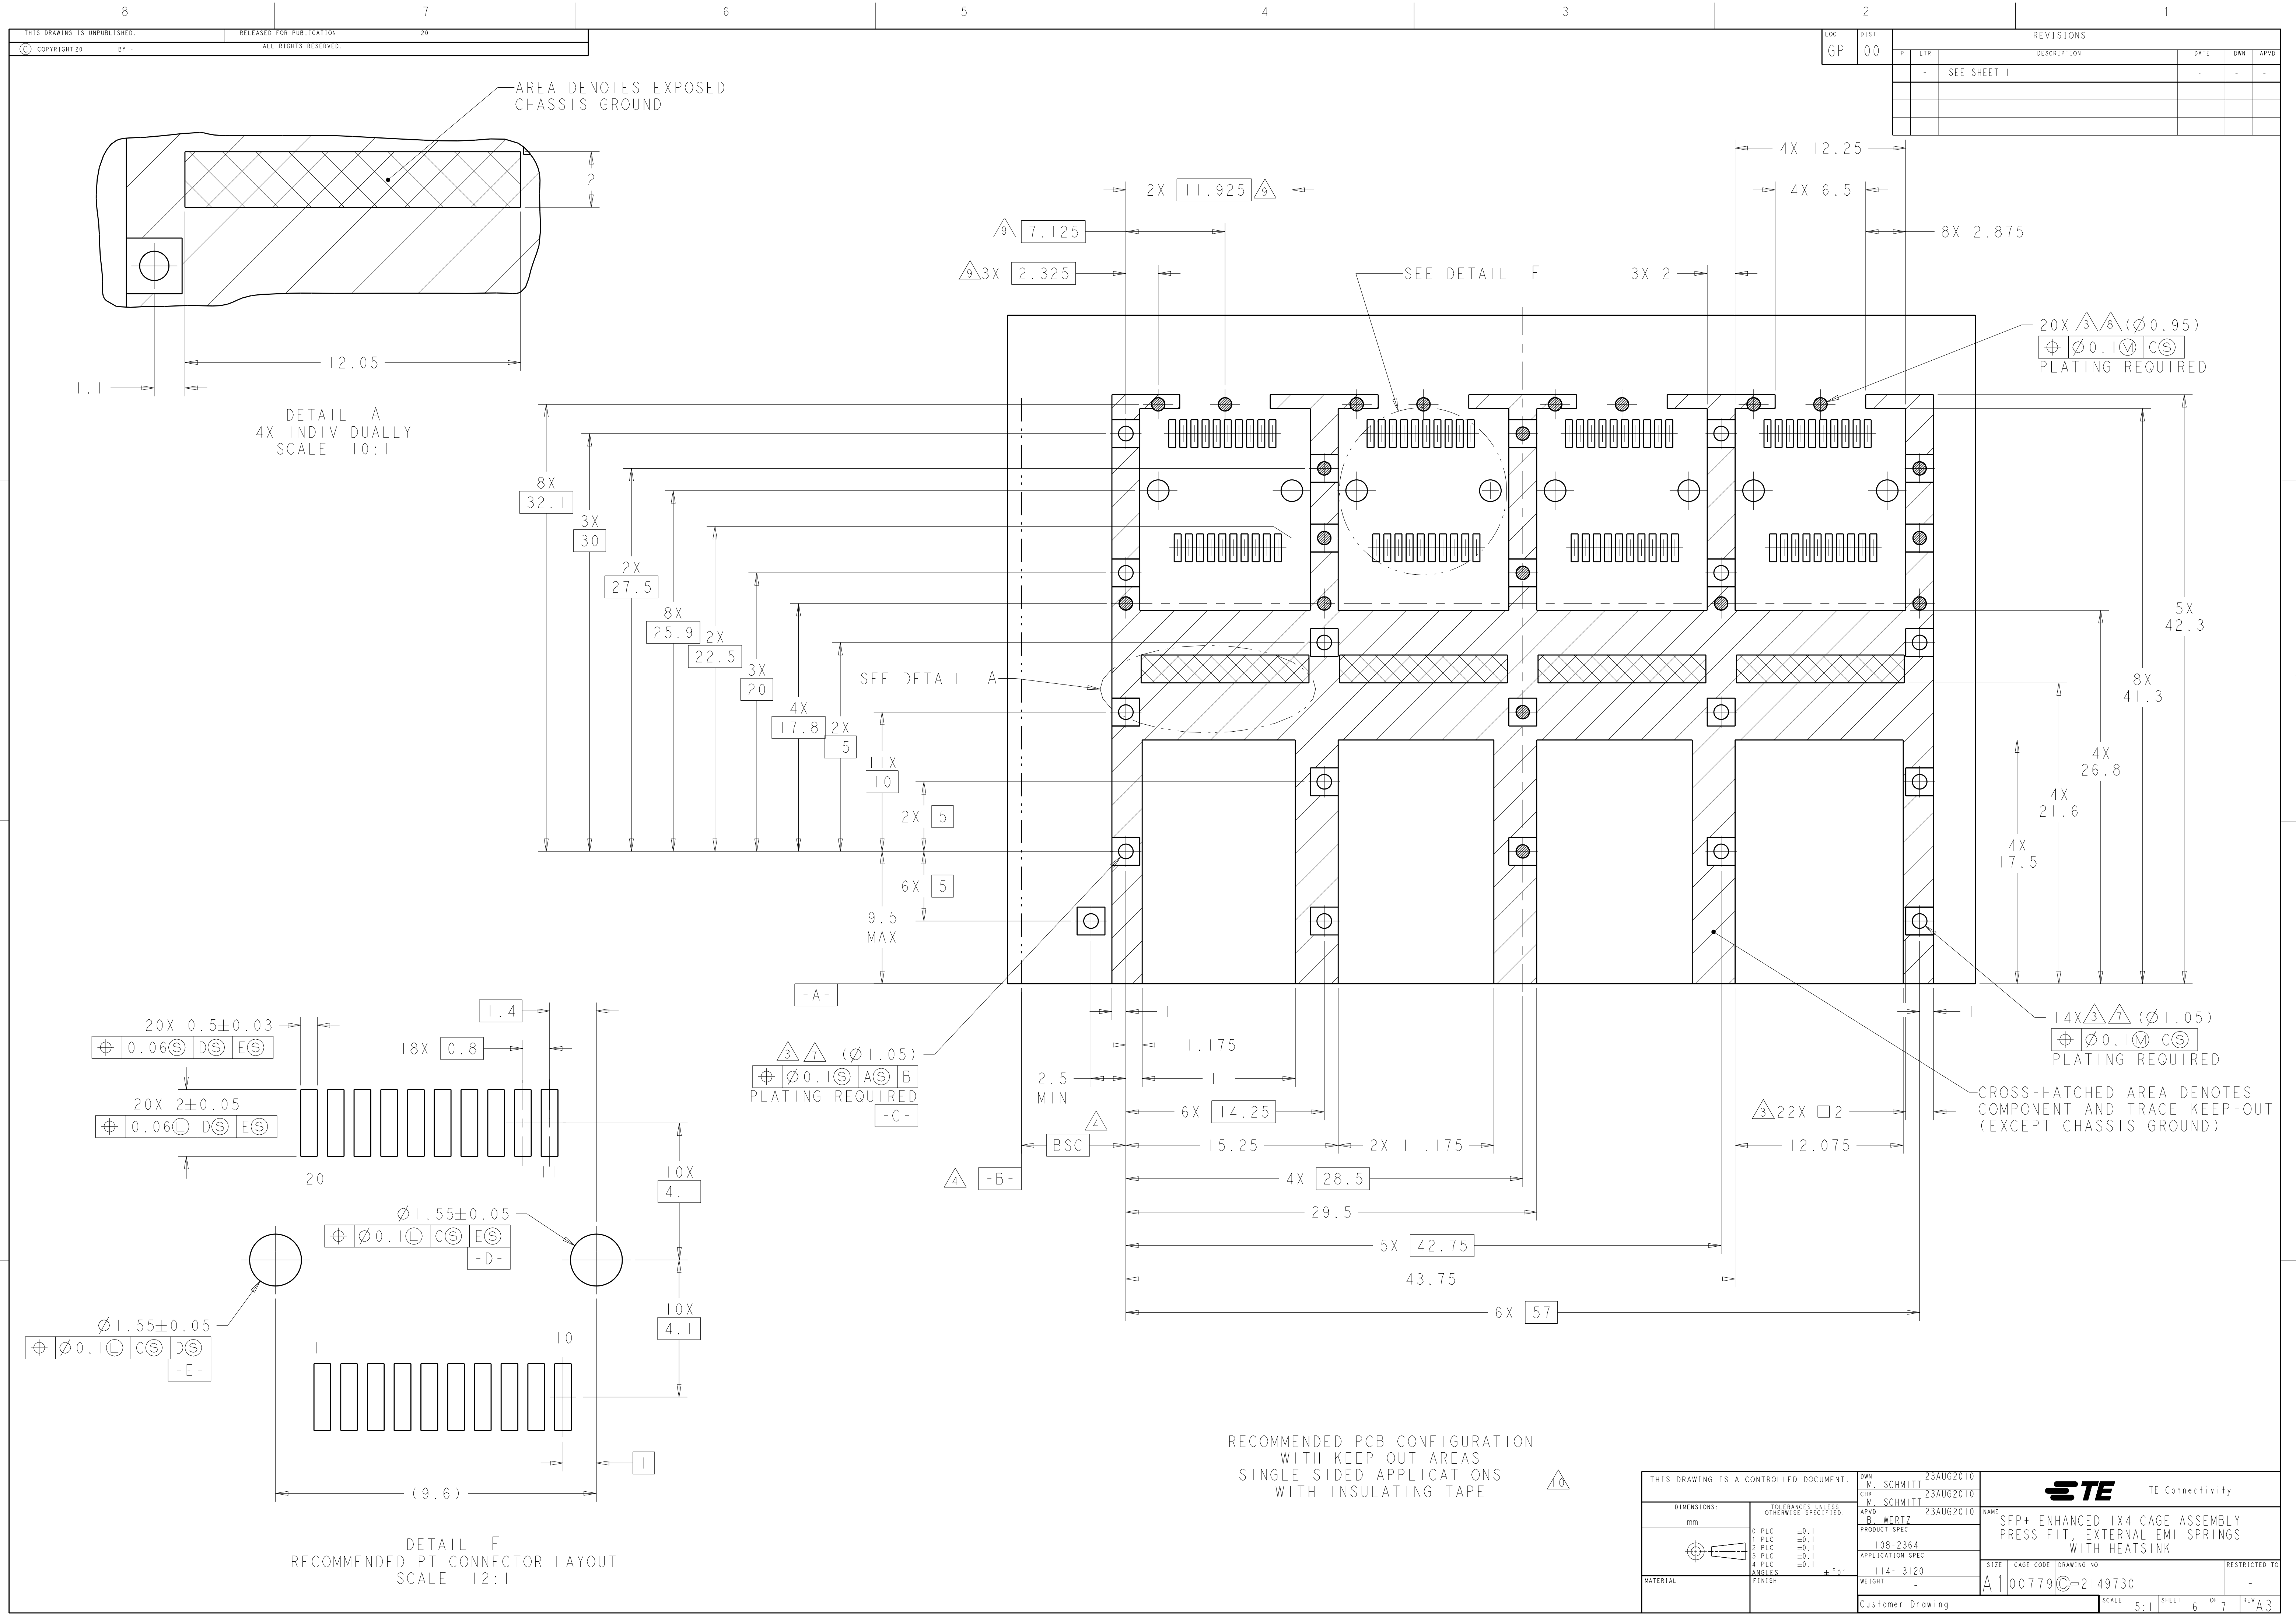

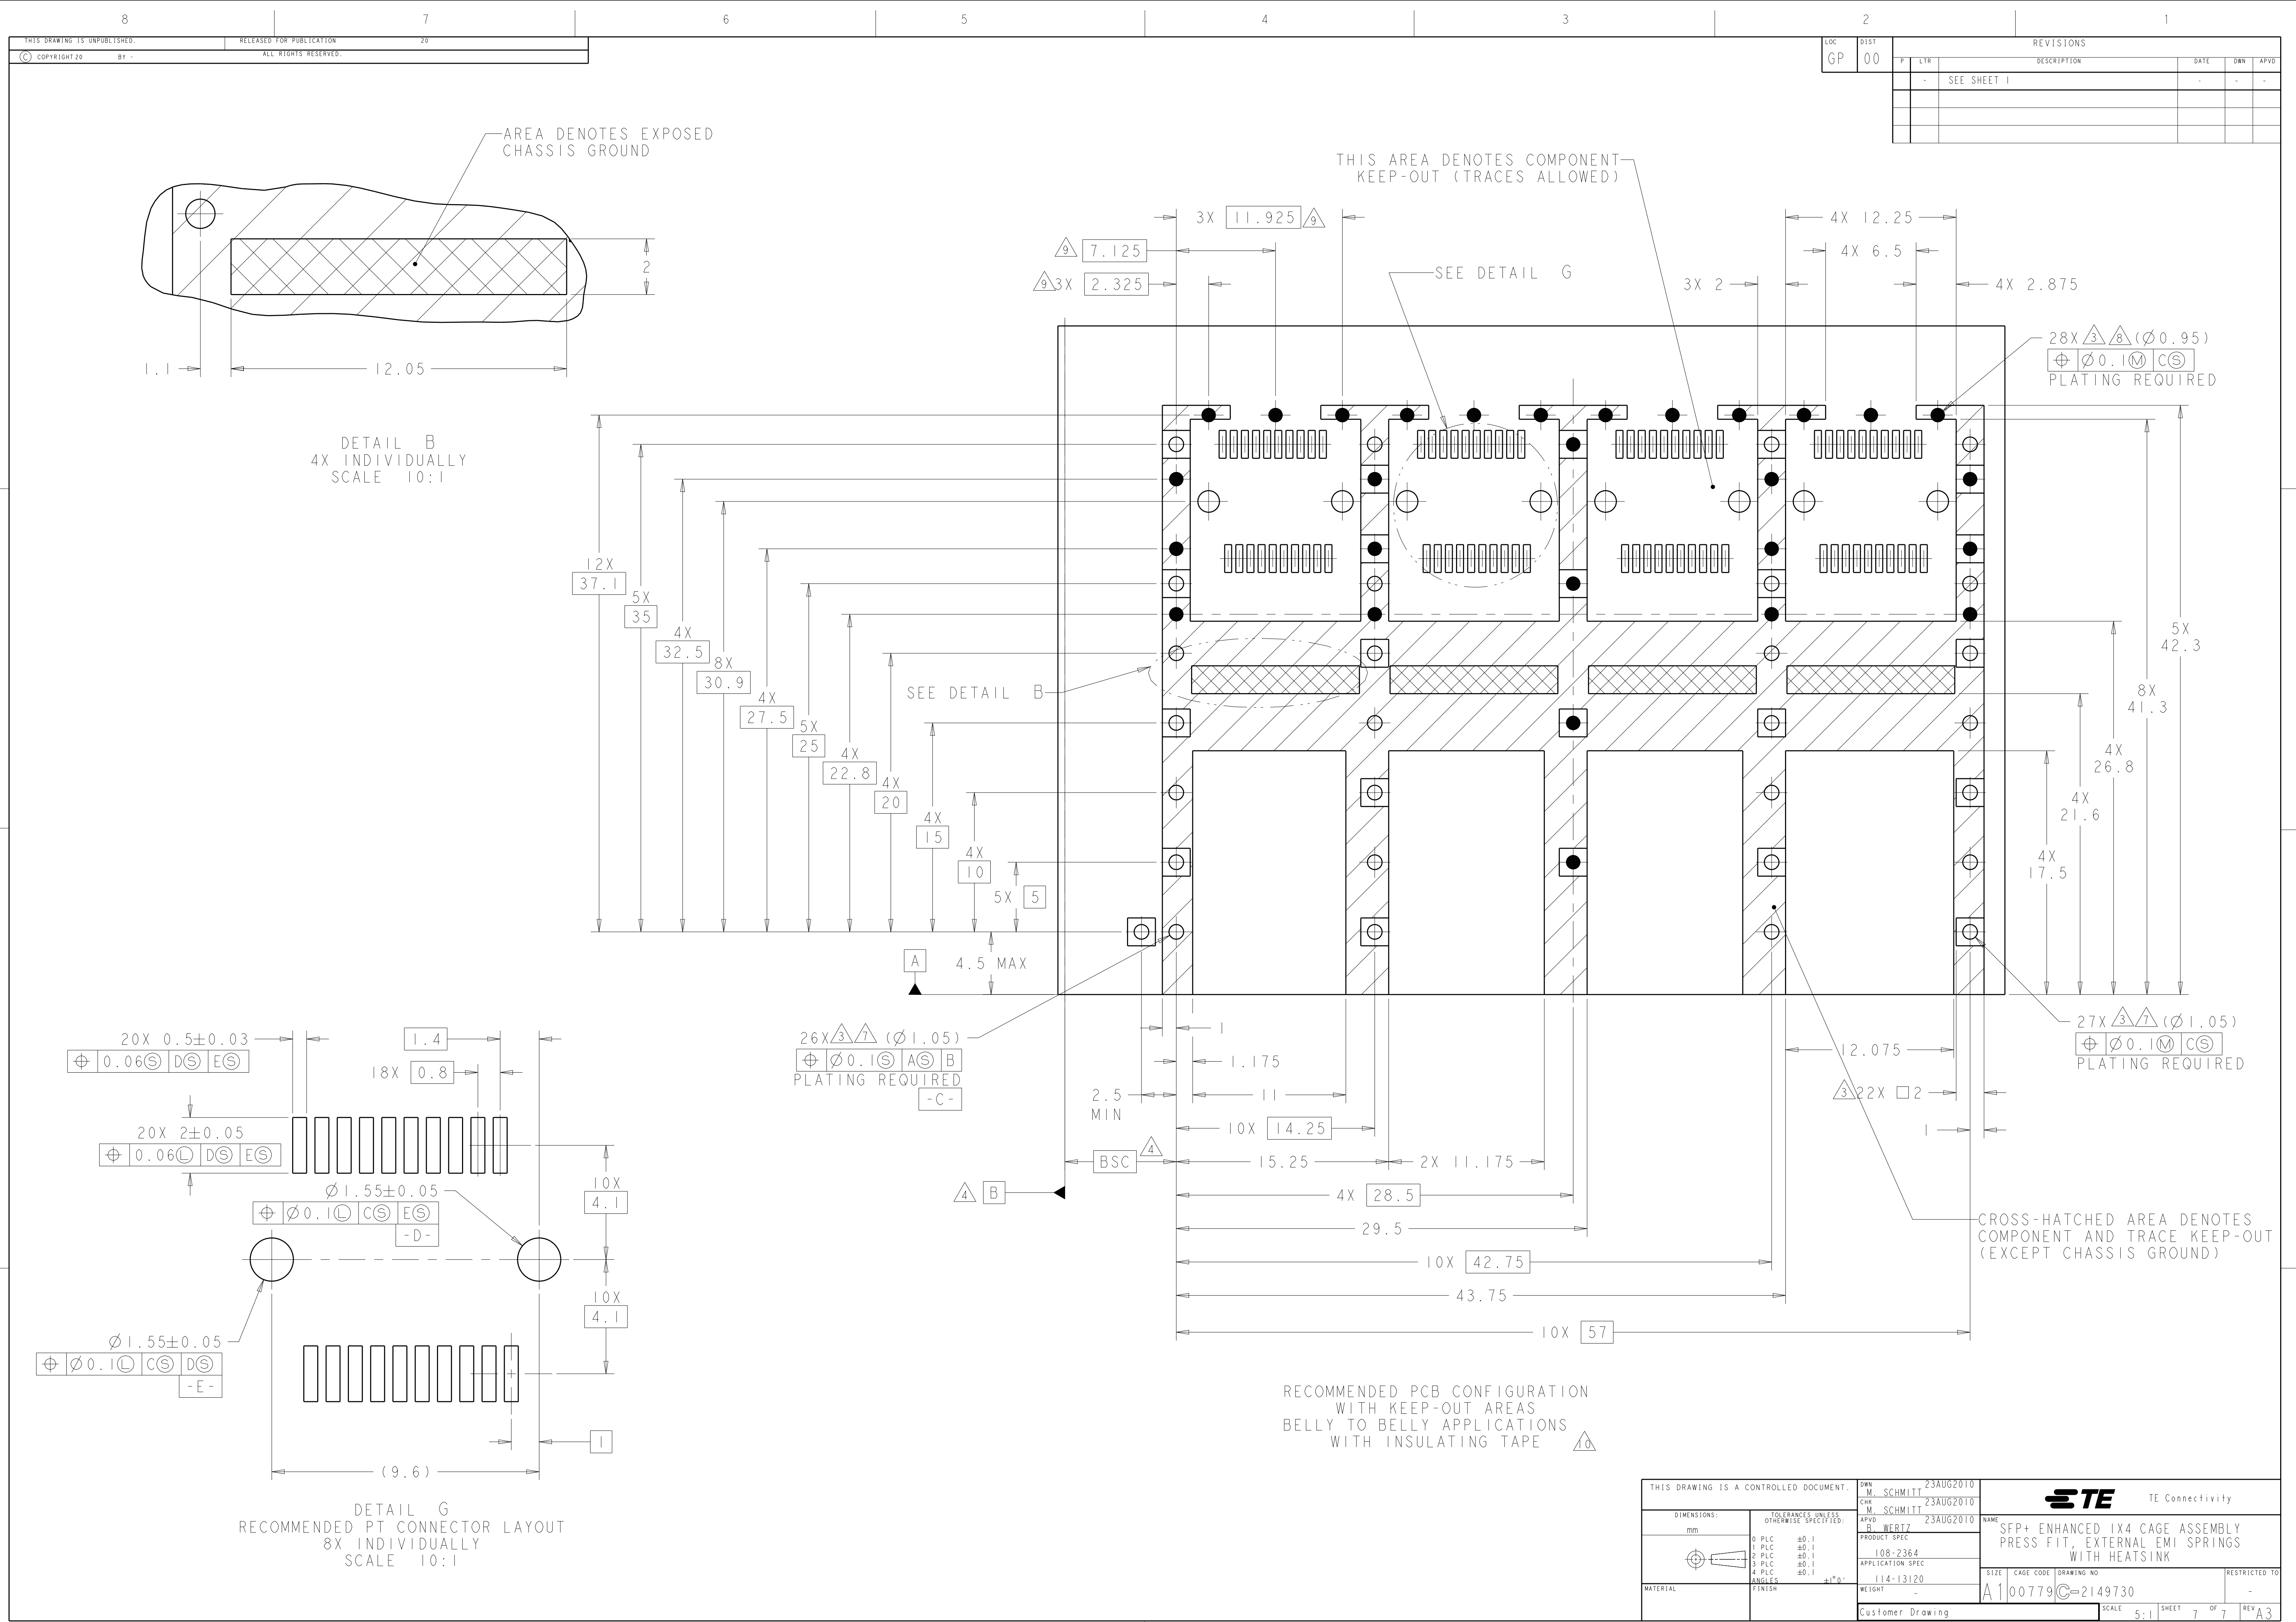

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru