



# Cement Power Resistors (RoHS Compliant)

# PRM-RC Series

## FEATURES


- 5% tolerance
- Exceptionally small, sturdy, and reliable
- Sealed with a special cement
- Excellent moisture resistance
- High temperature stability
- Ceramic flame retardant package
- Recommended wash method is alcohol



LEAD-FREE

RoHS Compliant


## DERATING CHART

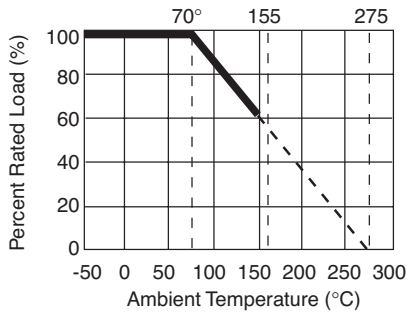


## HEAT RISE CHART



## PART NUMBERING SYSTEM

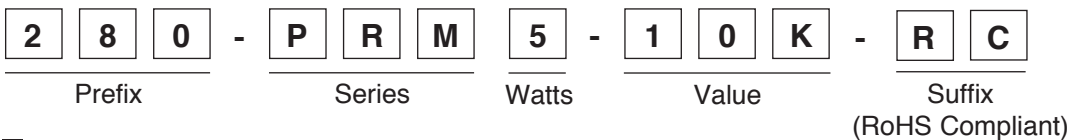

## SERIES, WATTAGE, VALUE RANGE, AND DIMENSIONS

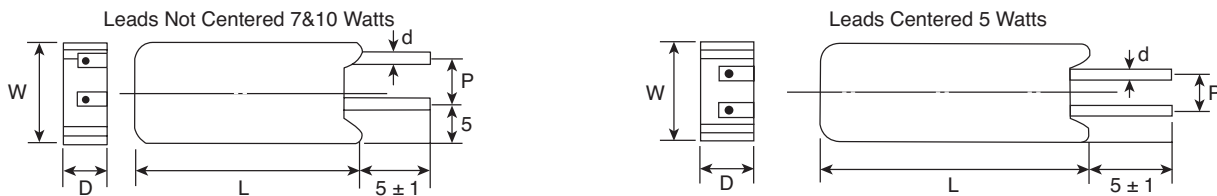


| Series | Watts (W) | Leads        | Value Ranges (Ω) |            | Dimensions (mm) |      |      |          |      |
|--------|-----------|--------------|------------------|------------|-----------------|------|------|----------|------|
|        |           |              | Wirewound        | Power Film | W ±1            | D ±1 | L ±1 | ød ±0.05 | P ±1 |
| PRM    | 5         | Centered     | 0.1 ~ 47         | 48 ~ 100K  | 12.5            | 9    | 25   | 0.75     | 5    |
| PRM    | 7         | Not Centered | 0.1 ~ 680        | 681 ~ 200K | 12.5            | 9    | 38   | 0.75     | 5    |
| PRM    | 10        | Not Centered | 0.1 ~ 910        | 911 ~ 200K | 12.5            | 9    | 50   | 0.75     | 5    |

## STANDARD STOCKED VALUES (Ω) All standard E-24 values not listed are available special order.

|      |      |      |     |     |     |    |    |    |    |    |     |     |     |     |     |     |     |    |    |      |     |  |
|------|------|------|-----|-----|-----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|----|----|------|-----|--|
| 0.1  | 0.3  | 0.51 | 1.0 | 3.0 | 6.8 | 15 | 33 | 56 | 68 | 75 | 100 | 150 | 200 | 300 | 330 | 470 | 680 | 1K | 2K | 4.7K | 10K |  |
| 0.22 | 0.47 | 0.68 | 2.2 | 4.7 | 10  | 20 | 47 |    |    |    |     |     |     |     |     |     |     |    |    |      |     |  |

## CONSTRUCTION

| No. | Subpart Name                       | Material   | Material Generic Name                             |
|-----|------------------------------------|--|---|
| 1   | Body                               | Rod Type Ceramics  | Al <sub>2</sub> O <sub>3</sub> , SiO <sub>2</sub> |
| 2   | End Cap                            | Tin plated iron surface  | Tin : 5%, Iron : 95%                              |
| 3   | Lead                               | Annealed copper wire<br>(Electrosolder plated surface) Pb Free | Tin-Coated Copper wire                            |
| 4   | Ceramic Case                       | Ceramic  | Al <sub>2</sub> O <sub>3</sub> , SiO <sub>2</sub> |
| 5   | Resistance wire<br>Resistance Film | Ni-Cr Alloy<br>Metal Oxide Film                                | Ni-Cr Alloy<br>Metal Oxide Film                   |
| 6   | Filling Materials                  | Quartz mixed sand  | SiO <sub>2</sub>                                  |

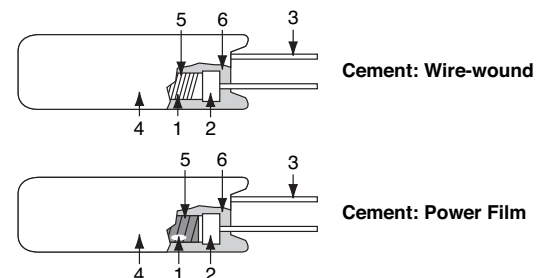



# Cement Power Resistors (RoHS Compliant)

# PRM-RC Series

## CHARACTERISTICS

| Characteristics                 | Limits  | Test Methods ( JIS C 5201-1 )   |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
|---------------------------------|---|---|-------|-------------|------|---|---------------|---------|---|------------|--------------|---|----------------|---------|---|------------|--------------|
| Temperature coefficient         | ± 350 PPM / °C Max.<br><20Ω ± 400 PPM / °C  | 5.2 Natural resistance change per temp. degree centigrade.<br>$\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (PPM / } ^\circ\text{C)}$ R1: Resistance value at room temperature (t1)<br>R2: Resistance value at room temp. plus 100 °C (t2)   |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| Dielectric withstanding voltage | No evidence of flashover, mechanical damage, arcing or insulation break down        | 5.7 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at AC potential respectively for 60 +10/ -0 secs.  |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| Temperature cycling             | Resistance change rate is ± (2% + 0.05Ω) Max. with no evidence of mechanical damage | 7.4 Resistance change after continuous 5 cycles for duty shown below: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Step</th> <th>Temperature</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55 °C ± 3 °C</td> <td>30 mins</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>10 ~ 15 mins</td> </tr> <tr> <td>3</td> <td>+155 °C ± 2 °C</td> <td>30 mins</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>10 ~ 15 mins</td> </tr> </tbody> </table> | Step  | Temperature | Time | 1 | -55 °C ± 3 °C | 30 mins | 2 | Room temp. | 10 ~ 15 mins | 3 | +155 °C ± 2 °C | 30 mins | 4 | Room temp. | 10 ~ 15 mins |
| Step                            | Temperature   | Time  |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| 1                               | -55 °C ± 3 °C   | 30 mins   |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| 2                               | Room temp.  | 10 ~ 15 mins  |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| 3                               | +155 °C ± 2 °C  | 30 mins   |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| 4                               | Room temp.  | 10 ~ 15 mins  |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| Short time overload             | Resistance change rate is ± (5% + 0.05Ω) Max. with no evidence of mechanical damage | 5.5 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds  |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| Load life in humidity           | <b>Resistance value</b>   | 7.9 Resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") in a humidity test chamber controlled at 40 °C ± 2 °C and 90 to 95 % relative humidity  |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
|                                 | Wire-wound  |   | ± 5%  |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| Load life                       | Power film: <100KΩ  | 7.10 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at 70 °C ± 2 °C  |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
|                                 | >100KΩ  |   | ± 10% |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| Terminal strength               | <b>Resistance value</b>   | 6.1 <b>Direct load :</b><br>Resistance to a 2.5 kgs direct load for 10 secs. in the direction of the longitudinal axis of the terminal leads<br><b>Twist test :</b><br>Terminal leads shall be bent through 90 ° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations   |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
|                                 | Wire-wound  |   | ± 5%  |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| Resistance to soldering heat    | Power film: <100KΩ  | 6.4 Permanent resistance change when leads immersed to 3.2 to 4.8 mm from the body in 350 °C ± 10 °C solder for 3 ± 0.5 secs.   |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
|                                 | >100KΩ  |   | ± 10% |             |      |   |               |         |   |            |              |   |                |         |   |            |              |
| Solderability                   | 95 % coverage Min.  | 6.5 The area covered with a new , smooth clean , shiny and continuous surface free from concentrated pinholes.<br>Test temp. of solder : 245 °C ± 3 °C<br>Dwell time in solder : 2 ~ 3 seconds  |       |             |      |   |               |         |   |            |              |   |                |         |   |            |              |



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)