

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0740622502

Status:

Active

Overview:

[vhdm](#)

Description:

2.00mm (.079") Pitch VHDM® Board-to-Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Shield End Version, 200 Circuits, Pin Length 6.25mm (.246")

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19980

General

Product Family

Backplane Connectors

Series

[74062](#)

Application

Backplane

Application Tooling Documents

Tooling Manual

Comments

No Keying Position

Component Type

PCB Header

Overview

[vhdm](#)

Product Name

VHDM®

Style

N/A

Physical

Circuits (Loaded)

200

Circuits (maximum)

200

Color - Resin

Black

Durability (mating cycles max)

200

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

Yes

Keying to Mating Part

None

Material - Metal

Beryllium Copper, High Performance Alloy (HPA), Stainless Steel

Material - Plating Mating

Gold

Material - Plating Termination

Tin-Lead

Material - Resin

High Temperature Thermoplastic

Number of Columns

N/A

Number of Pairs

Open Pin Field

Number of Rows

8

Orientation

Vertical

PC Tail Length (in)

0.098 In

PC Tail Length (mm)

2.50 mm

PCB Locator

No

PCB Retention

None

PCB Thickness Recommended (in)

0.070 In

PCB Thickness Recommended (mm)

1.80 mm

Packaging Type

Tube

Pitch - Mating Interface (in)

0.079 In

Pitch - Mating Interface (mm)

2.00 mm

Pitch - Term. Interface (in)

0.079 In

Pitch - Term. Interface (mm)


2.00 mm

Plating min: Mating (µin)

30

Plating min: Mating (µm)

0.75



Series

image - Reference only

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[74062Series](#)

Mates With

[74040 VHDM® Board-to-Board Daughtercard Receptacle](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.




Global

Description	Product #
Flat Rock Tooling for Pneumatic Press	0622013700
VHDM® Signal Pin Inserter Repair Tool	0622015700
VHDM® 8 Row Pin and Shield Repair Tool	0622015900

Plating min: Termination (µin)	30	VHDM® 8 Row Shield Extraction Tool	0622016100
Plating min: Termination (µm)	0.75	VHDM® Insertion Module for Advanced Mate Signal Header, 6 Row by 25 Wide, 50.00mm (1.97")	0622020206
Polarized to PCB	Yes	VHDM® Insertion Module for Standard Shield Signal Header, 8 Row by 25 Wide, 50.00mm (1.97")	0622020210
Stackable	Yes		
Surface Mount Compatible (SMC)	Yes		
Temperature Range - Operating	-55°C to +105°C		
Termination Interface: Style	Through Hole - Compliant Pin		
Electrical			
Current - Maximum per Contact	1A		
Data Rate	3.125 Gbps		
Real Signals (per 25mm)	100		
Shield Type	Ground Plane Shield		
Shielded	Yes		
Voltage - Maximum	120V AC (RMS)/DC		
Material Info			
Reference - Drawing Numbers			
Sales Drawing	SD-74062-002		
VHDM and Very High Density Metric are trademarks of Amphenol Corporation			

This document was generated on 05/19/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

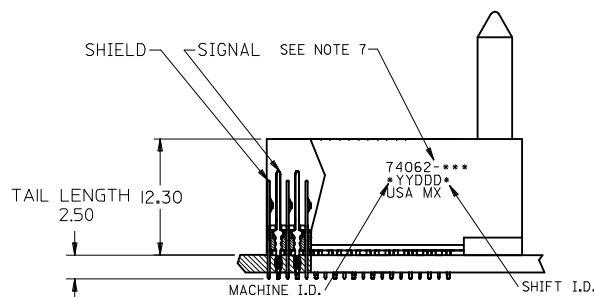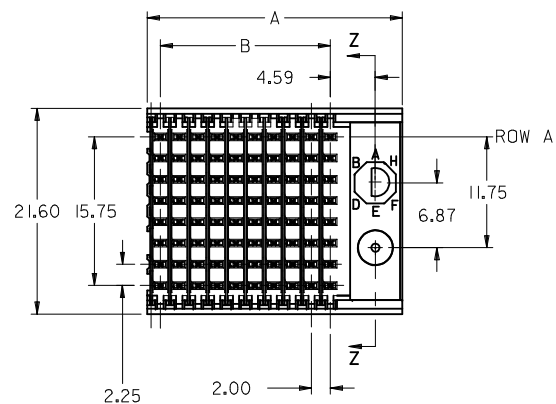

- NOTES:
1. MATERIALS:
HOUSING - LIQUID CRYSTAL POLYMER (LCP),
GLASS-FILLED, UL 94V-0, COLOR: BLACK
SIGNAL PIN & SHIELD - COPPER ALLOY
 2. FINISHES:
CONTACT AREA: SELECTIVE GOLD (Au)
PCB TAILS: SELECTIVE TIN/LEAD (Sn/Pb)
OR SELECTIVE MATTE TIN (Sn)
NICKEL (Ni) OVERALL.
 3. THIS PART CONFORMS TO MOLEX PRODUCT
SPECIFICATION PS-74031-999
 4. FOR MIXED CONTACT LENGTHS CONSULT
MOLEX FOR AVAILABILITY
 5. FOR SPECIFIC MATERIAL NUMBERS & MATING
INFORMATION REFER TO SHEET 2
 6. PACKAGE PER PK-74061-003
 7. EITHER MARK PART WITH PART NUMBER & DATE
CODE APPROXIMATELY WHERE SHOWN OR PLACE
LABEL ON THE TUBE.

ADD NO GDE/NO KEY EC NO: UCP2009-2089 Z CHWBSMART 2009/02/23 CHYKD-SDANALLEY 2009/02/23 APPR: SMILLER 2009/02/23	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY	DATE	TITLE			
			4 PLACES	±---	±---	MWANG	1998/11/12	VHDM 8 ROW			
			3 PLACES	±---	±---	CHECKED BY	DATE	SHIELD END BACKPLANE			
			2 PLACES	±---	±---	JLAURX	1998/11/12	SALES ASSEMBLY			
			1 PLACE	±---	±---	APPROVED BY	DATE	 MOLEX INCORPORATED			
			ANGULAR ±1/2°			CBIXLER	1998/11/12				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.	DOCUMENT NO.		SHEET NO.		
						SEE SHEET 2		SD-74062-002		1 OF 2	
REV						SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

M/N 74062-()	---0*	---1*	---2*	---3*	---4*	---5*	---6*	---7*	---8*	---9*
KEYING PIN ORIENTATION										

NO GUIDE PIN
NO KEYING PIN

74062 - * * *

NUMBER OF COLUMNS/PLATING
10 = 10 COLUMN TIN/LEAD
25 = 25 COLUMN TIN/LEAD
90 = 10 COLUMN MATTE TIN
85 = 25 COLUMN MATTE TIN

CONTACT LOAD
(PIN LENGTH)
1 & 6 = 4.75
2 & 7 = 6.25
3 & 8 = 4.25
4 & 9 = 5.15



PART NUMBER	COLUMN	NUMBER OF SIGNAL PIN	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um) THICKNESS
74062-*0*1	10	80	10	27.00	18.00	4.75	0.76	0.76-1.52
74062-*0*6							1.27	
74062-*5*1	25	200	25	57.00	48.00	6.25	0.76	
74062-*5*6							1.27	
74062-*0*2	10	80	10	27.00	18.00	4.25	0.76	
74062-*0*7							1.27	
74062-*5*2	25	200	25	57.00	48.00	5.15	0.76	
74062-*5*7							1.27	
74062-*0*3	10	80	10	27.00	18.00	4.75	0.76	
74062-*0*8							1.27	
74062-*5*3	25	200	25	57.00	48.00	6.25	0.76	
74062-*5*8							1.27	
74062-*0*4	10	80	10	27.00	18.00	5.15	0.76	
74062-*0*9							1.27	
74062-*5*4	25	200	25	57.00	48.00	4.75	0.76	
74062-*5*9							1.27	

ADD NO GDE/NO KEY EC NO: UCP2009-2089 DRWN:BSWART 2009/02/23 CHKD:SDANIELLEY 2009/02/23 APPR:SMILLER 2009/02/23	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY DATE MWANG 1998/11/12		TITLE VHDM 8 ROW SHIELD END BACKPLANE SALES ASSEMBLY			
			4 PLACES	± ---	± ---	CHECKED BY DATE JLAURX 1998/11/12					
			3 PLACES	± ---	± ---	APPROVED BY DATE CBIXLER 1998/11/12		molex MOLEX INCORPORATED			
			2 PLACES	± ---	± ---	MATERIAL NO. DOCUMENT NO.					
			1 PLACE	± ---	± ---	SEE CHART		SHEET NO. 2 OF 2			
			ANGULAR ±1/2°			SIZE C				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru