

NEW

ATP19 Series Anti-Vandal Sealed Pushbutton Switch

A
Pushbutton

Features/Benefits

- **Momentary or Lock version**
- **IP67 sealed & IK10 (Stainless steel bushing)**
- **Capable of up to 3A resistive load**
- **50,000 life cycle at full load**
- **Various colors of LED illuminate indicator**
- **Choices of pushbutton with symbol on spot, ring or power logo**

Typical Applications

- **Control Panels including car park and traffic light**
- **Industrial Instruments**
- **Lifts / Escalator**
- **Communication equipment**
- **Alarm, safety and security systems**



C&K US

Specifications

FUNCTION: Single pole and double poles
CONTACT ARRANGEMENT: N.O. and N.C.
MOUNTING TYPE: Threaded front panel mount
TORQUE FOR THREADED BODY: 5-14 Nm

Mechanical

OPERATING LIFE: Momentary 1,000,000 cycles
Self-lock 500,000 cycles
TOTAL TRAVEL: about 3.2 mm
OPERATING FORCE: 1 pole $2.5 \pm 1N$
2 pole $3.5 \pm 1N$

Electrical

CONTACT RATING: 1th 5A/250VAC
3A / 250VAC
3A / 28VDC
OPERATING LIFE: 50,000 make-and-break cycles at full load
DIELECTRIC STRENGTH: 2,000 V RMS @ sea level
INSULATION RESISTANCE: 1,000 MΩ min. @ 500 VDC
INITIAL CONTACT RESISTANCE : 50 mΩ max @1A 12VDC

Materials

BUSHING: Stainless steel / Nickel plated brass / Aluminum alloy
BASE: PBT (UL 94-A0), PC (UL 94-V2)
ACTUATOR: PC (UL 94-V2); Stainless steel / Nickel plated brass / Aluminum alloy
INTERNAL ASSEMBLY: POM / PA66
SPRING: Steel
SEALING / O-ring: Silicone
TERMINALS: Brass with silver or gold plated
CONTACT: Copper, silver plated

Operating Environment

OPERATING TEMPERATURE: -20°C to +55°C
SEALING / PROTECTION: IP67 / IK10 (Stainless steel bushing)

NOTE: Specifications and materials listed above are for switches with standard options.
For information on specific and custom switches, please contact Customer Service.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box.



Designation _____
ATP19 Series

Actuator Style _____
S Standard
R Raised
D Dome without LED only

Actuator Indicator _____
L0 Without LED
L1 Fix ring
L2 Spot
L3 Moving ring (standard actuator only)
L4 Power logo*
L5 Moving ring & Power logo* (standard actuator only)

LED Illumination

Color	Dual color
0 Without LED	A Red & Green
2 White	B Red & Blue
3 Red	D Blue & Yellow
5 Yellow	G Red & Yellow
6 Green	H Green & Yellow
7 Blue	J Orange & Green

LED voltage (20mA)
00 Without LED
03 3V
06 6V
12 12V
24 24V
36 36V
A1 110V AC
A2 220V AC

Terminal plating
Q Silver
G Gold

Termination
03 STD solder lug
04 Short solder lug
W1 Wire lead 500mm **
W2 Wire lead 1,000mm **

Mechanical function
A Momentary
E Lock

Contact arrangement
S SPDT
D DPDT

Bushing type

Round	Double D shape
B0 Stainless (Natural)	M0 Stainless (Natural)
B1 Brass (Mirror Chrome Plated)	M1 Brass (Mirror Chrome plated)
B2 Brass (Nickel plated)	M2 Brass (Nickel plated)
B3 Al alloy (Black anodized)	M3 Al alloy (Black anodized)



Dimensions are shown: mm (inches)
Specifications and dimensions subject to change

C&K

11 Apr 19

* Available on double D-shape bushing only.
** Available upon request, please contact your sales representative for details.




ATP19 Series Anti-Vandal Sealed Pushbutton Switch

NEW


STANDARD VIEW

Pushbutton

ROUND BUSHING

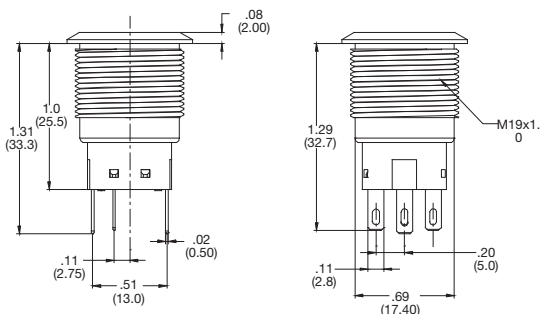


DOUBLE-D BUSHING

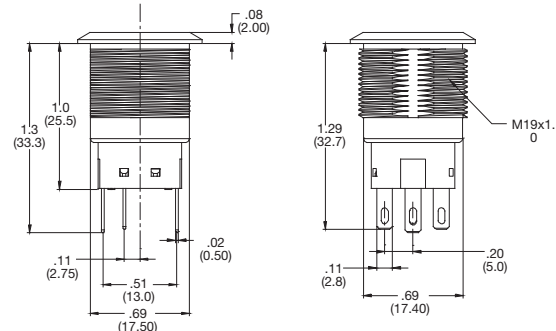


ACTUATOR STYLE


S STANDARD



R RAISED




D DOME




ACTUATOR INDICATOR


L0 WITHOUT LED




L1 FIX RING




L3 MOVING RING




L2 SPOT

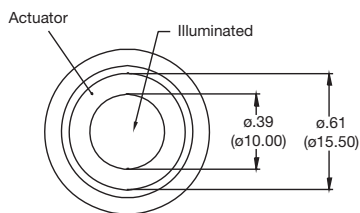

L4 POWER LOGO



L5 POWER & MOVING RING



NEW


ATP19 Series Anti-Vandal Sealed Pushbutton Switch




A
Pushbutton

CIRCUIT


SPDT




SPDT - SINGLE COLOR LED




SPDT - DUAL COLOR LED




DPDT



DPDT - SINGLE COLOR LED




DPDT - DUAL COLOR LED




TERMINATION



03 SOLDERLUG

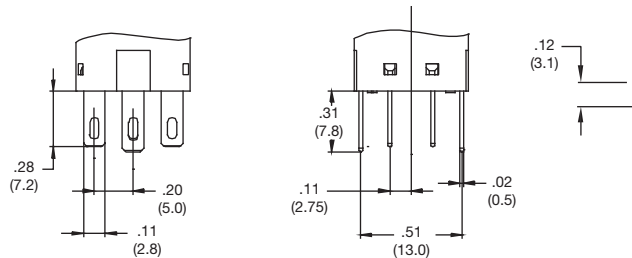

04 SHORT SOLDER LUG

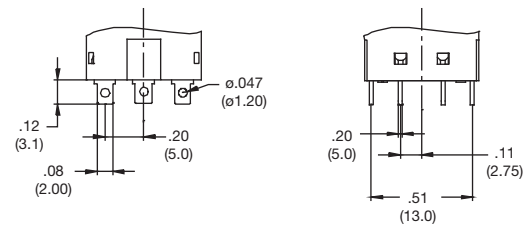


W1 OR W2 WIRE LEAD

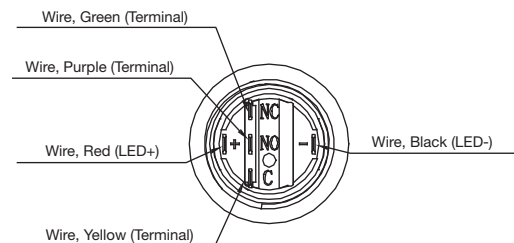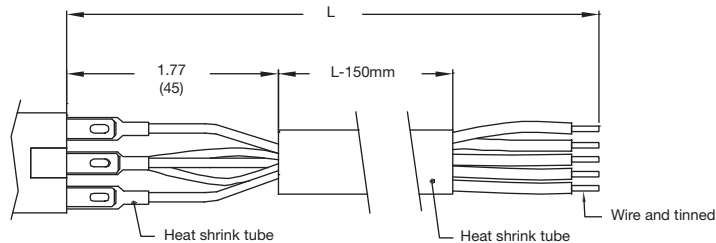


HARDWARE

HEX NUT

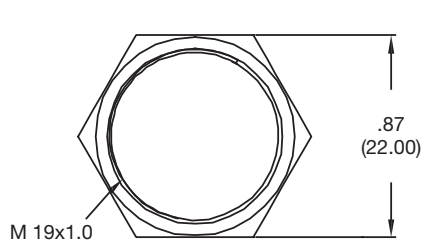

O - RING

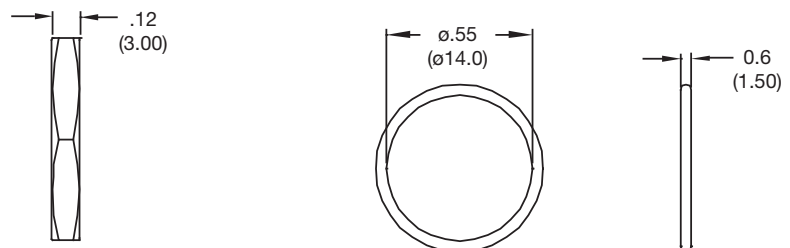

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru