



### Main

Product or component type	Resistance braking unit
Range compatibility	Altivar Process ATV900
Maximum braking power	80 kW
Product compatibility	Variable speed drive ATV930 without braking chopper 55 kW 200...240 V Variable speed drive ATV930 without braking chopper 75 kW 200...240 V
Thermal losses	400 W
Activation threshold	395 V DC +/- 1 %
Permanent braking power	60 kW (at constant power and at engage threshold)
Protection type	Integrated thermal protection by thermal probe
Minimum resistor value to associate	1.4 Ohm

### Complementary

Electrical connection	Cable, connection capacity: 3 x 120 mm <sup>2</sup> , 3 x 250 kcmil <= 5 m between drive and braking unit Cable, connection capacity: 3 x 120 mm <sup>2</sup> , 3 x 250 kcmil <= 10 m between braking unit and braking resistors
Maximum DC bus voltage	450 V
Load factor	0.05 for 150 kW at constant power and at engage threshold 0.15 for 120 kW at constant power and at engage threshold 0.5 for 95 kW at constant power and at engage threshold 1 for 75 kW at constant power and at engage threshold
Cycle time	<= 240 s
Volume of cooling air	43853.35 Gal/hr(US) (166 m <sup>3</sup> /h)
Operating position	Vertical +/- 10 degree
Mechanical robustness	Vibrations class 3M4 conforming to IEC 60721-3-3
Product weight	34.17 lb(US) (15.5 kg)
Width	8.5 in (216 mm)
Height	25.91 in (658 mm)
Depth	11.93 in (303 mm)

### Environment

ambient air temperature for operation	14...122 °F (-10...50 °C)
ambient air temperature for storage	-40...158 °F (-40...70 °C)
IP degree of protection	IP20 IP21 on top
environmental characteristic	Chemical pollution resistance class 3C3 conforming to IEC 60721-3-3 Dust pollution resistance class 3S3 conforming to IEC 60721-3-3 Humidity resistant class 3K3 conforming to IEC 60721-3-3
relative humidity	5...95 % without condensation
operating altitude	<= 3280.84 ft (1000 m) without derating 1000...4000 m with current derating 1 % per 100 m

### Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 1545 - Schneider Electric declaration of conformity	Compliant - since 1545 - Schneider Electric declaration of conformity
WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm.


Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm.

For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## Dimensions


### Left Side and Rear View

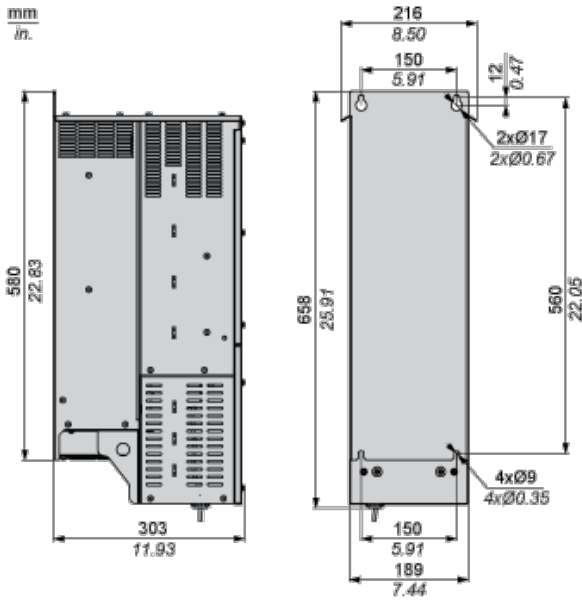

### Mounting and Clearance

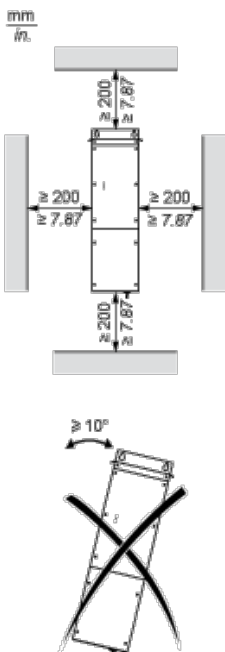

### Recommended Schema

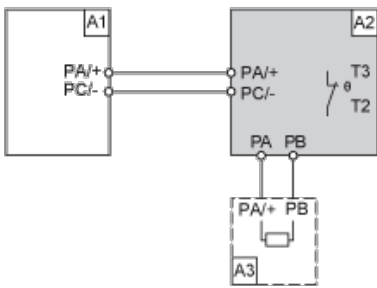

A1 : Drive

A2 : Braking unit

A3 : Braking resistor

PA, DC Bus

PB,

PC :

T2, Thermal relay

T3 :

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)