

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


0480372100

Status:

Active

Description:

Universal Serial Bus (USB) Shielded I/O Plug, Type A, Right Angle, Surface Mount, Straight Tab 4.80mm (.189"), 0.76µm (30µ") Gold (Au) Plating, PCB Thickness 1.60mm (.063"), Tape on Reel Package, Lead Free

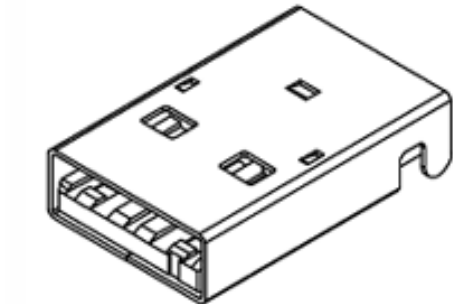

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-48037-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	I/O Connectors
Series	48037
Application	Wire-to-Board
Comments	Straight Tab 4.80mm (.189")
Component Type	Plug
Product Name	USB
Type	A

Physical

Boot Color	N/A
Circuits (Loaded)	4
Circuits (maximum)	4
Gender	Plug
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	1
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.063 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Embossed Tape on Reel
Panel Mount	Yes
Pitch - Mating Interface (in)	0.078 In, 0.098 In
Pitch - Mating Interface (mm)	2.00 mm, 2.50 mm
Pitch - Term. Interface (in)	0.078 In, 0.098 In
Pitch - Term. Interface (mm)	2.00 mm, 2.50 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-20°C to +85°C
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No

Electrical

Current - Maximum	1.5A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	150V AC (RMS)

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
48037Series

Mates With
USB Type A Receptacle


Material Info

Reference - Drawing Numbers

Product Specification	PS-48037-001
Sales Drawing	SD-48037-003

This document was generated on 02/02/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

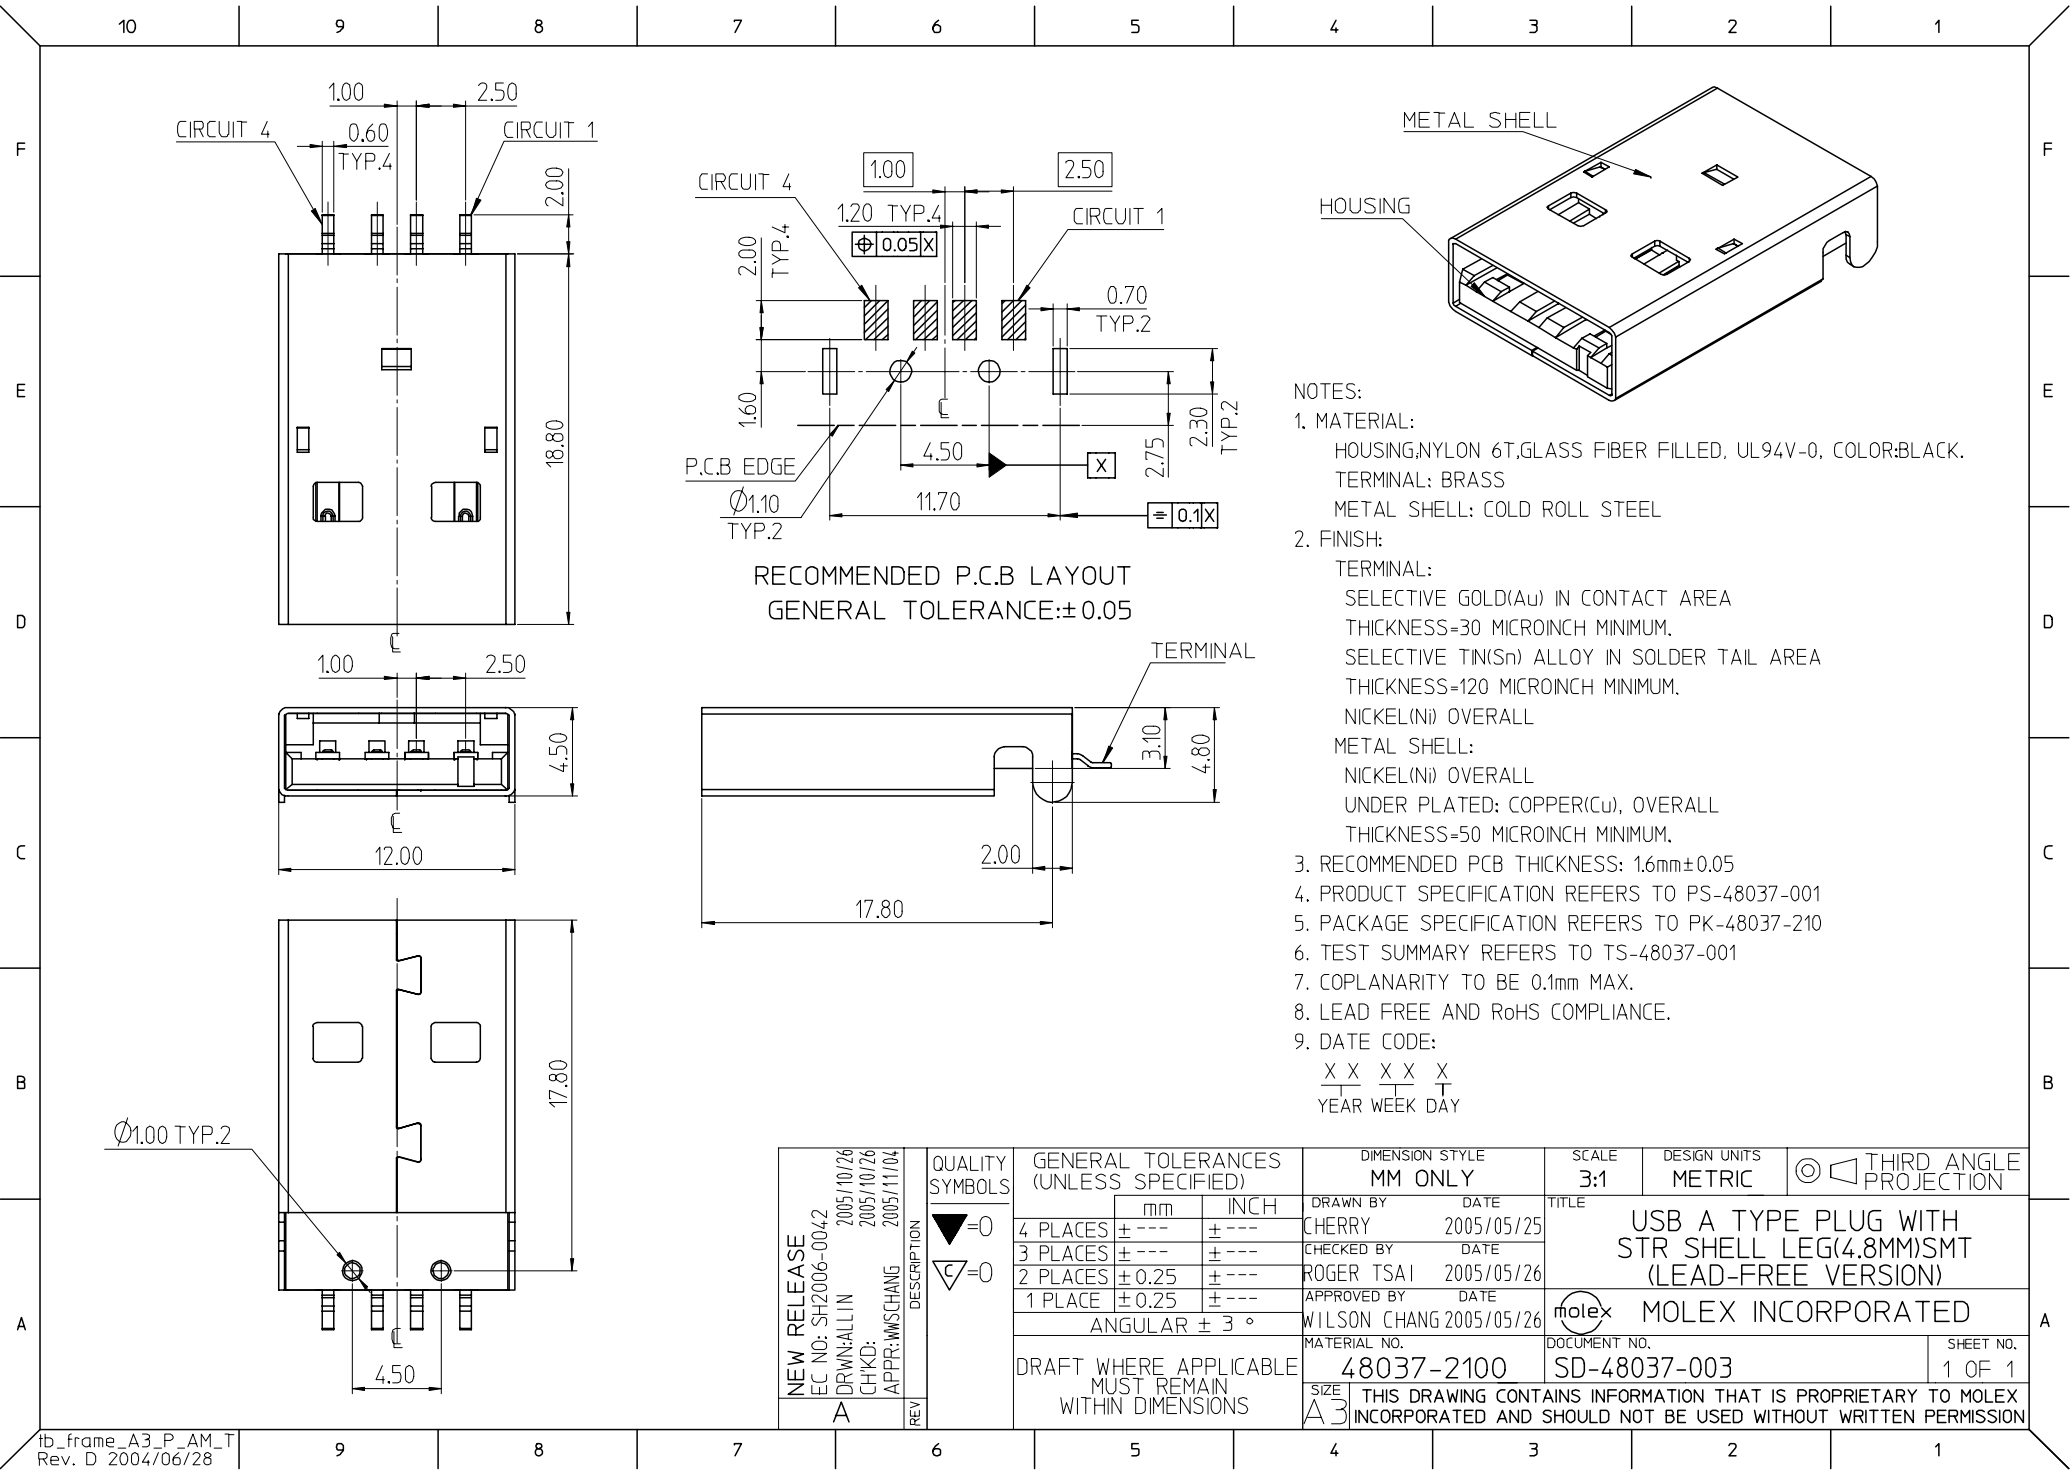

NOTES:

1. MATERIAL:

HOUSING: NYLON 6T, GLASS FIBER FILLED, UL94V-0, COLOR: BLACK.

TERMINAL: BRASS

METAL SHELL: COLD ROLL STEEL

2. FINISH:

TERMINAL:

SELECTIVE GOLD(Au) IN CONTACT AREA

THICKNESS=30 MICROINCH MINIMUM.

SELECTIVE TIN(Sn) ALLOY IN SOLDER TAIL AREA

THICKNESS=120 MICROINCH MINIMUM.

NICKEL(Ni) OVERALL

METAL SHELL:

NICKEL(Ni) OVERALL

UNDER PLATED: COPPER(Cu), OVERALL

THICKNESS=50 MICROINCH MINIMUM.

3. RECOMMENDED PCB THICKNESS: 1.6mm±0.05

4. PRODUCT SPECIFICATION REFERS TO PS-48037-001

5. PACKAGE SPECIFICATION REFERS TO PK-48037-210

6. TEST SUMMARY REFERS TO TS-48037-001

7. COPLANARITY TO BE 0.1mm MAX.

8. LEAD FREE AND RoHS COMPLIANCE.

9. DATE CODE:

X X X X X
YEAR WEEK DAY

NEW RELEASE EC NO: SH2006-0042 DRWN:ALLIN CHKD: APPR:WWSCHANG A	2005/10/26 2005/10/26 2005/11/04	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION 			
					mm	INCH	DRAWN BY CHERRY	DATE 2005/05/25	TITLE USB A TYPE PLUG WITH STR SHELL LEG(4.8MM)SMT (LEAD-FREE VERSION) MOLEX INCORPORATED				
				4 PLACES	± ---	± ---	CHECKED BY	DATE					
				3 PLACES	± ---	± ---	ROGER TSAI	2005/05/26					
				2 PLACES	± 0.25	± ---	APPROVED BY	DATE	DOCUMENT NO. SD-48037-003				
				1 PLACE	± 0.25	± ---	WILSON CHANG	2005/05/26					
ANGULAR ± 3 °		MATERIAL NO. 48037-2100		SHEET NO. 1 OF 1									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru