

## TYPICAL INDICATOR ORDERING EXAMPLE

KB

02

K

W01

—

12

—

FF

Shapes

Bushing Mounting

01Square

02Round

03Rectangular

Snap-in Mounting

04Square

05Round

06Rectangular

Housing

KBlack only

Terminals

W01Silver Solder Lug\*

Lamps

Incandescent Lamp Used with Solid Cap

055-volt

1212-volt

Incandescent or Neon Lamp Used with Insert Cap

055-volt

1212-volt

01110-volt Neon

Bright LED Used with Cap for LED

Colors

5CRed

5DAmber

5FGreen

Resistor

No CodeNo Resistor

055-volt

1212-volt

2424-volt

Super Bright LED Used with Cap for LED

6BWhite

6FGreen

6GBlue

Cap Types & Colors

Solid Cap: Lens/Filter Colors

BBWhite/White

CBRed/White

CCRed/Red

EBYellow/White

FBGreen/White

FFGreen/Green

GBBlue/White

GGBlue/Blue

Insert Cap: Lens/Filter Colors

JBClear/White

JCClear/Red

JEClear/Yellow

\*JFClear/Green

\*JGClear/Blue

\* JF & JG not suitable with neon.

LED Cap: Lens/Diffuser Colors

ABSquare Spot Illuminated Black Cap/White Window

JBClear/White

JCClear/Red

JDClear/Amber

JFClear/Green

LED Cap: Lens/Diffuser Colors

JBClear/White

\* Wire harness & cable assemblies offered only in Americas

\* Wire harness & cable assemblies offered only in Americas

## DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

KB02KW01-12-FF



12-volt Incandescent Lamp  
Solid Cap with Green Lens  
and Green Filter


Black Housing  
Round with Bushing Mounting

Silver Solder Lug Terminals


### SHAPES & MOUNTING TYPES

#### Bushing Mounting


**01** .551" (14mm)  
Square



**02** .551" (14mm)  
Round




**03** .551" x .728" (14mm x 18.5mm)  
Rectangular




#### Snap-in Mounting


**04** .551" (14mm)  
Square



**05** .551" (14mm)  
Round




**06** .551" x .728" (14mm x 18.5mm)  
Rectangular




The bezel is an integral part of the indicator body.

#### Bushing Mounting

Without  
Keyway




Panel Thickness:  
.020" ~ .315"  
(0.5 ~ 8mm)



With  
Keyway

#### Snap-in Mounting


Panel Thickness:  
.039" ~ .138"  
(1.0 ~ 3.5mm)



### TERMINALS

**W01**

Silver Solder Lug



### LAMP COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C.  
If the source voltage exceeds the rated voltage, a ballast resistor is required.  
The ballast resistor calculation and more lamp detail are shown in the Supplement section.

#### Incandescent & Neon Lamps

| AT611<br>Incandescent                                                               | AT615<br>Neon                                                                       |           | <b>05</b> | <b>12</b>     | <b>01</b> | Recommended Resistors<br>for Neon:<br>33K ohms for 110V AC;<br>100K ohms for 220V AC |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|-----------|---------------|-----------|--------------------------------------------------------------------------------------|
|  |  | Voltage   | V         | 5V AC         | 12V AC    | 110V AC                                                                              |
|                                                                                     |                                                                                     | Current   | I         | 115mA         | 60mA      | 1.5mA                                                                                |
|                                                                                     |                                                                                     | Endurance | Hours     | 7,000 average |           | 10,000                                                                               |

#### Bright LED without Resistor

AT635

LEDs are colored in OFF state.





T-1 1/2 Bi-pin

|                                   | Red             | Amber | Green | No Code No Resistor |           |           |
|-----------------------------------|-----------------|-------|-------|---------------------|-----------|-----------|
| Color Codes                       | 5C              | 5D    | 5F    | Red                 | Amber     | Green     |
| Forward Peak Current              | I <sub>FM</sub> |       |       | 30mA                | 30mA      | 30mA      |
| Continuous Forward Current        | I <sub>F</sub>  |       |       | 20mA                | 20mA      | 20mA      |
| Forward Voltage                   | V <sub>F</sub>  |       |       | 1.9V                | 2.0V      | 2.1V      |
| Reverse Peak Voltage              | V <sub>RM</sub> |       |       | 5V                  | 5V        | 5V        |
| Current Reduction Rate Above 25°C | ΔI <sub>F</sub> |       |       | 0.42mA/°C           | 0.29mA/°C | 0.42mA/°C |
| Ambient Temperature Range         |                 |       |       | -25° ~ +50°C        |           |           |



T-1 1/2 Bi-pin


## LAMP COLORS &amp; SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C.  
If the source voltage exceeds the rated voltage, a ballast resistor is required.  
The ballast resistor calculation and more lamp detail are shown in the Supplement section.


## Bright LED with Resistor

| AT634                                                                                                                                         | Color Codes:                      | Red          | Amber | Green | Resistor Codes |      |      |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|--------------|-------|-------|----------------|------|------|
|                                                                                                                                               |                                   | 5C           | 5D    | 5F    | 05             | 12   | 24   |
| LEDs are colored in OFF state.<br><br><br><br>T-1 1/4 Bi-pin | Forward Peak Current              | $I_{FM}$     |       |       | —              | —    | —    |
|                                                                                                                                               | Continuous Forward Current        | $I_F$        |       |       | 25mA           | 20mA | 10mA |
|                                                                                                                                               | Forward Voltage                   | $V_F$        |       |       | 5V             | 12V  | 24V  |
|                                                                                                                                               | Reverse Peak Voltage              | $V_{RM}$     |       |       | 4V             | 8V   | 16V  |
|                                                                                                                                               | Current Reduction Rate Above 25°C | $\Delta I_F$ |       |       | —              | —    | —    |
|                                                                                                                                               | Ambient Temperature Range         |              |       |       | -25° ~ +50°C   |      |      |


AT634  
5-volt  
2-element  
with 1 Resistor



AT634  
12-volt  
4-element  
with 2 Resistors



AT634  
24-volt  
4-element  
with 2 Resistors



## Super Bright Single Element LED

| AT625G Blue<br>AT631B White<br>AT632F Green                                                           | <br><br>T-1 Bi-pin | <br>Color | 6B           | 6F        | 6G        |
|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|--------------|-----------|-----------|
|                                                                                                       |                                                                                                       |                                                                                             | White        | Green     | Blue      |
| <br><br>T-1 Bi-pin |                                                                                                       | Forward Peak Current                                                                        | $I_{FM}$     | 30mA      | 30mA      |
|                                                                                                       |                                                                                                       | Continuous Forward Current                                                                  | $I_F$        | 20mA      | 20mA      |
|                                                                                                       |                                                                                                       | Forward Voltage                                                                             | $V_F$        | 3.6V      | 3.5V      |
|                                                                                                       |                                                                                                       | Reverse Peak Voltage                                                                        | $V_{RM}$     | 5V        | 5V        |
|                                                                                                       |                                                                                                       | Current Reduction Rate Above 25°C                                                           | $\Delta I_F$ | 0.50mA/°C | 0.50mA/°C |
|                                                                                                       |                                                                                                       | Ambient Temperature Range                                                                   | -25° ~ +50°C |           |           |

## CAP TYPES &amp; COLOR COMBINATIONS


Color Codes:    B White    C Red    E Yellow    F Green    G Blue    J Clear

## Solid Cap for Incandescent Lamp


Lens/Filter Colors Available:

|    |    |
|----|----|
| BB | FB |
| CB | FF |
| CC | GB |
| EB | GG |



AT485  
Square



AT486  
Round



AT4021  
Rectangular



Translucent Colored Lens



Translucent Colored Filter



Lamp AT611

Material: Polycarbonate    Finish: Glossy

### CAP TYPES & COLOR COMBINATIONS

**Color Codes:**    **A** Black    **B** White    **C** Red    **D** Amber    **E** Yellow    **F** Green    **G** Blue    **J** Clear

#### Insert Cap for Incandescent or Neon Lamp

**Lens/Filter Colors Available:**

**JB**

**AT487**  
Square

**AT488**  
Round

**AT4022**  
Rectangular



Transparent Clear Lens




**JC**

**JE**



Translucent Colored Filter

**JF**



**JG**



JF and JG not suitable with neon lamp.

Material: Polycarbonate    Finish: Glossy

Lamp AT611

Lamp AT615



#### Spot Illuminated Cap for Bright LED without Resistor or with Resistor

**Cap/Window Colors Available:**

**AB**

**Opaque Black Cap with Translucent White Window for Spot Illumination**

**AT4051**  
Square



Bright LED  
AT635

Bright LED  
AT634

Material: Polycarbonate    Finish: Matte

#### Cap for Bright LED without Resistor or LED with Resistor

**Lens/Diffuser Colors Available:** (AT4133, 4132, 4134 white diffusers; AT4158, 4160, 4159 colored diffusers)

**JB**

**AT4133**

**AT4132**

**AT4134**



Transparent Clear Lens

Square

Round

Rectangular

**JC**

**AT4158**

**AT4160**




**AT4159**



Translucent Diffuser

**JD**

**JF**



Bright LED  
AT635

Bright LED  
AT634

Material: Polycarbonate    Finish: Glossy





## CAP TYPES &amp; COLOR COMBINATIONS

## Cap for Super Bright LED

Lens/Diffuser  
Colors Available:

**JB**

Clear Lens  
White Diffuser



Translucent Clear Lens








Translucent White Diffuser



Super Bright LEDs  
AT625, AT631, AT632

Material: Polycarbonate Finish: Glossy

## TYPICAL INDICATOR DIMENSIONS


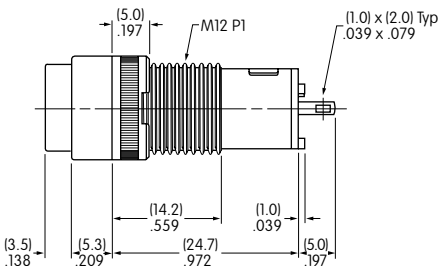





## Bushing Mount



KB01KW01-05-GG

## Snap-in Mount

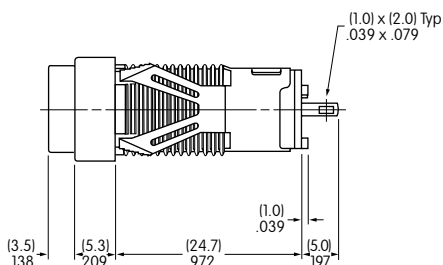

KB05KW01-05-FF

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)