






	I	2	3	4	5	6	7	8																																																																																																																										
A	<u>REFERENCE SPECIFICATIONS</u> -NFC 93425 (in compliance with HE 507)			Series ← DBML13W3S300N					A																																																																																																																									
B	<u>PHYSICAL CHARACTERISTICS</u> -INSULATOR MATERIAL: THERMOPLASTIC UL94V0 -CONTACT MATERIAL: PHOSPHOR BRONZE(SIGNAL CONTACT) GOLD OVER NICKEL -ACCESSORIES: STAINLESS STEEL or BRASS Cadmium plated, yellow passivation -SHELLS: STEEL Cadmium plated, yellow passivation			Shell size: E A B C D ← see sheet 3 M :characteristic for the DM series Front accessory definition see sheet 2 Blank :without accessory L :threaded insert M3 O :threaded insert UNC 4-40 V :female screw UNC 4-40 F :floating mounting S :spacer Layout of contacts (see sheet 3) ← Contacts ← S :Socket Termination type ← 3 Straight version Plating ← 00 straight solder 500 matings/unmatings 43 straight solder 500 matings/unmatings for harsh environment N :obligatory indication for HE 507 series ←					B																																																																																																																									
C	<u>ELECTRICAL CHARACTERISTICS</u> -NOMINAL CURRENT: 7.5A (SIGNAL CONTACT) -CONTACT RESISTANCE: <=7.3 m Ohms SIGNAL -CONTACT/CONTACT : >=1000 V -CONTACT/GROUND : >=1200 V -INSULATION RESISTANCE: >=5000 MOhms - CLIMATIC CATEGORY: 55/125/21 TEMPERATURE RANGE -55°C TO +125°C DAMP HEAT STEADY STATE 56 DAYS SALT SPRAY 48 HOURS								C																																																																																																																									
D									D																																																																																																																									
E									E																																																																																																																									
F				I3W3 FOR EXAMPLE <table><tr><td colspan="4">www.fciconnect.com</td><td>surface -</td><td>tolerance std</td><td>projection</td><td>mm</td></tr><tr><td colspan="4"></td><td>ISO 1302</td><td>ISO 406</td><td>ISO 1101</td><td></td></tr><tr><td colspan="4"></td><td colspan="3">TOLERANCES UNLESS OTHERWISE SPECIFIED</td><td></td></tr><tr><td colspan="4"></td><td>ANGULAR</td><td>0.X</td><td>±0.3</td><td>size A2</td></tr><tr><td colspan="4"></td><td>LINEAR</td><td>0.XX</td><td>±0.1</td><td>Scale 2:1</td></tr><tr><td colspan="4"></td><td>0° ±2°</td><td>0.XXX</td><td>±0.05</td><td>ECN LS07-0273</td></tr><tr><td colspan="4"></td><td colspan="3">Product family</td><td>- Spec.ref</td></tr></table> <table><tr><td>rev</td><td>ecn no</td><td>dr</td><td>date</td><td>Dr</td><td>M PESSON</td><td>2006/11/15</td><td>title</td><td>SUB FEMALE DMW</td><td>deg no</td><td>C01-8637-1751</td><td>Rev.</td><td>B</td></tr><tr><td>A</td><td>LS06-0174</td><td>MPE</td><td>2006/11/15</td><td>Eng</td><td>P LEGARE</td><td>2006/11/15</td><td>mixed power straight solder</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>B</td><td>LS07-0273</td><td>MPE</td><td>2007/10/30</td><td>Chr</td><td>P LEGARE</td><td>2006/11/15</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>Appr</td><td>P LEGARE</td><td>2006/11/15</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td></td><td></td><td></td><td>catalog no</td><td></td><td></td><td>CUSTOMER</td><td>sheet 1 of 7</td><td></td></tr></table>					www.fciconnect.com				surface -	tolerance std	projection	mm					ISO 1302	ISO 406	ISO 1101						TOLERANCES UNLESS OTHERWISE SPECIFIED								ANGULAR	0.X	±0.3	size A2					LINEAR	0.XX	±0.1	Scale 2:1					0° ±2°	0.XXX	±0.05	ECN LS07-0273					Product family			- Spec.ref	rev	ecn no	dr	date	Dr	M PESSON	2006/11/15	title	SUB FEMALE DMW	deg no	C01-8637-1751	Rev.	B	A	LS06-0174	MPE	2006/11/15	Eng	P LEGARE	2006/11/15	mixed power straight solder						B	LS07-0273	MPE	2007/10/30	Chr	P LEGARE	2006/11/15							-	-	-	-	Appr	P LEGARE	2006/11/15							-	-	-	-				catalog no			CUSTOMER	sheet 1 of 7		F
www.fciconnect.com				surface -	tolerance std	projection	mm																																																																																																																											
				ISO 1302	ISO 406	ISO 1101																																																																																																																												
				TOLERANCES UNLESS OTHERWISE SPECIFIED																																																																																																																														
				ANGULAR	0.X	±0.3	size A2																																																																																																																											
				LINEAR	0.XX	±0.1	Scale 2:1																																																																																																																											
				0° ±2°	0.XXX	±0.05	ECN LS07-0273																																																																																																																											
				Product family			- Spec.ref																																																																																																																											
rev	ecn no	dr	date	Dr	M PESSON	2006/11/15	title	SUB FEMALE DMW	deg no	C01-8637-1751	Rev.	B																																																																																																																						
A	LS06-0174	MPE	2006/11/15	Eng	P LEGARE	2006/11/15	mixed power straight solder																																																																																																																											
B	LS07-0273	MPE	2007/10/30	Chr	P LEGARE	2006/11/15																																																																																																																												
-	-	-	-	Appr	P LEGARE	2006/11/15																																																																																																																												
-	-	-	-				catalog no			CUSTOMER	sheet 1 of 7																																																																																																																							
	I	2	3	4	5	6	7	8																																																																																																																										

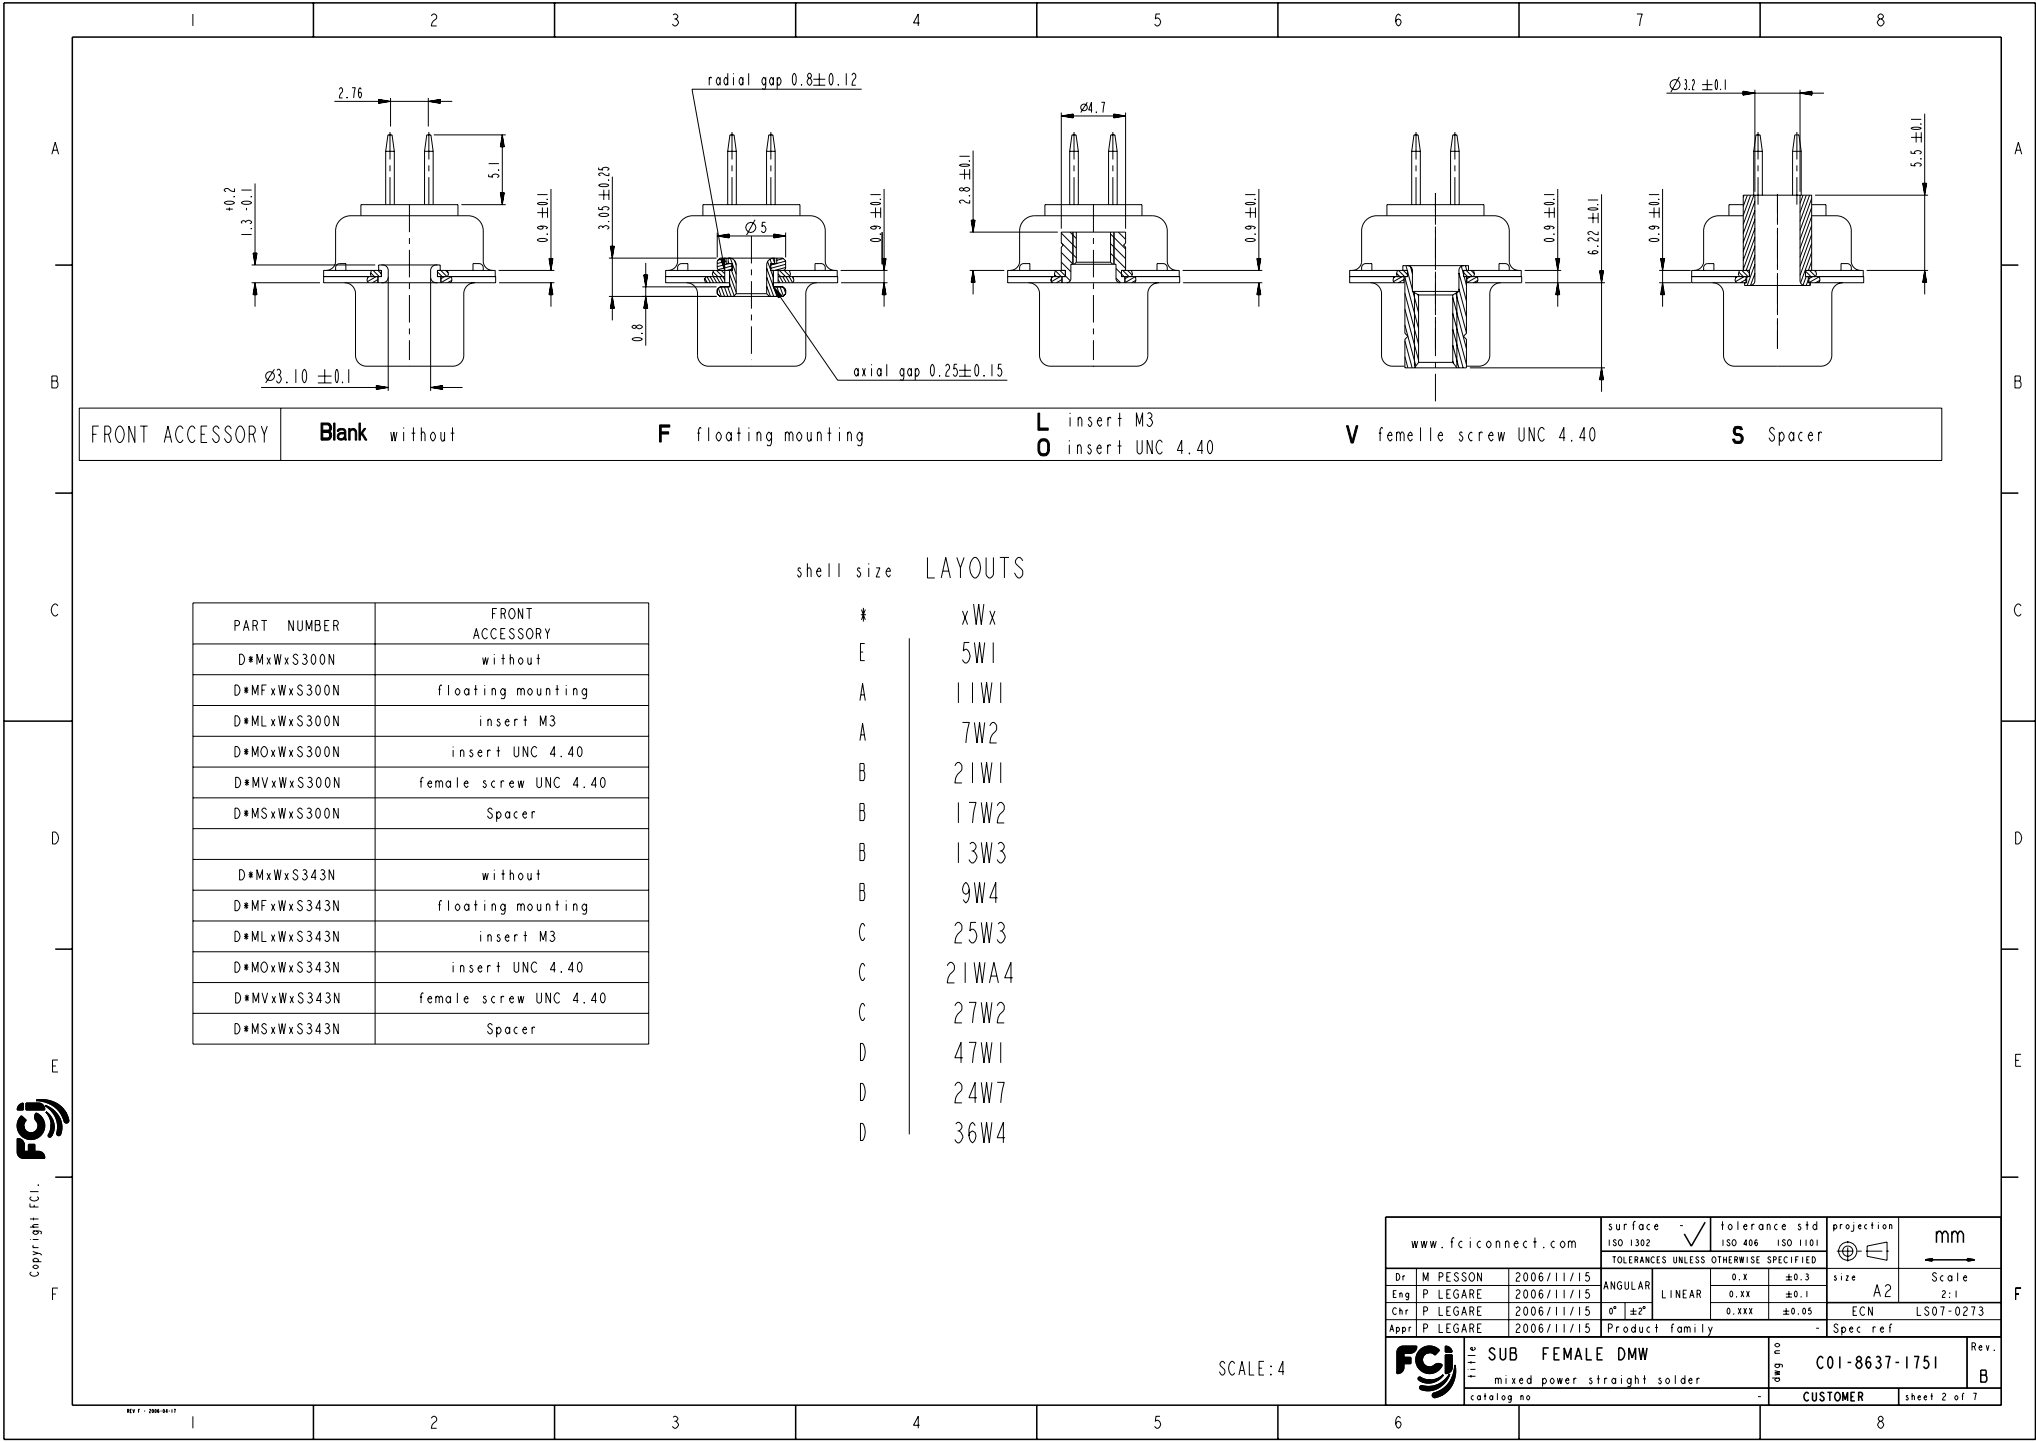

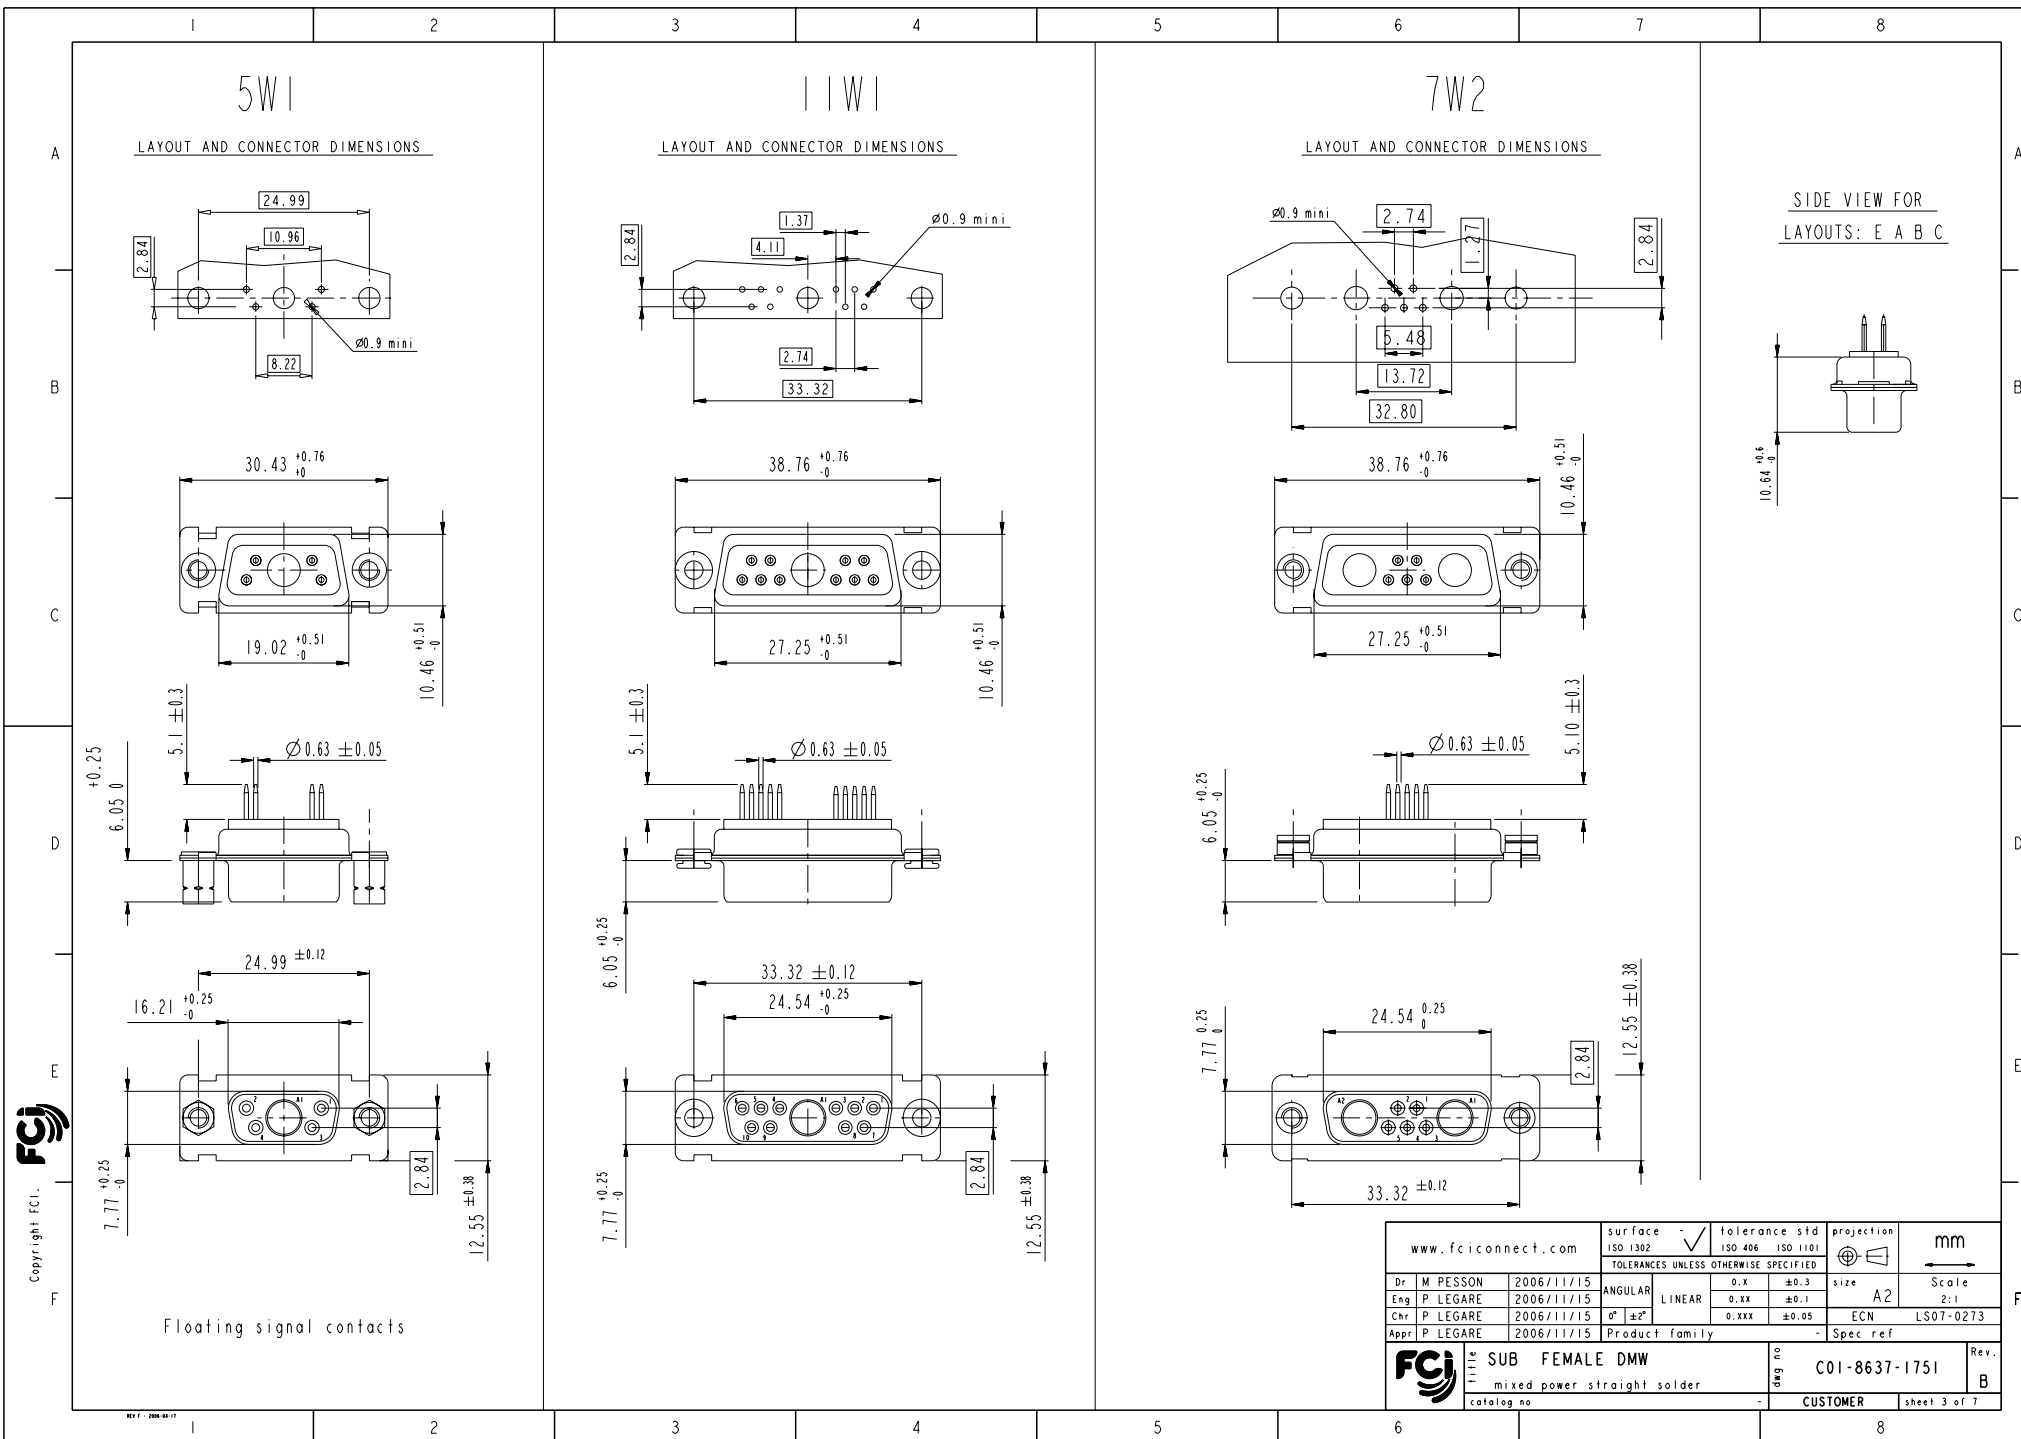


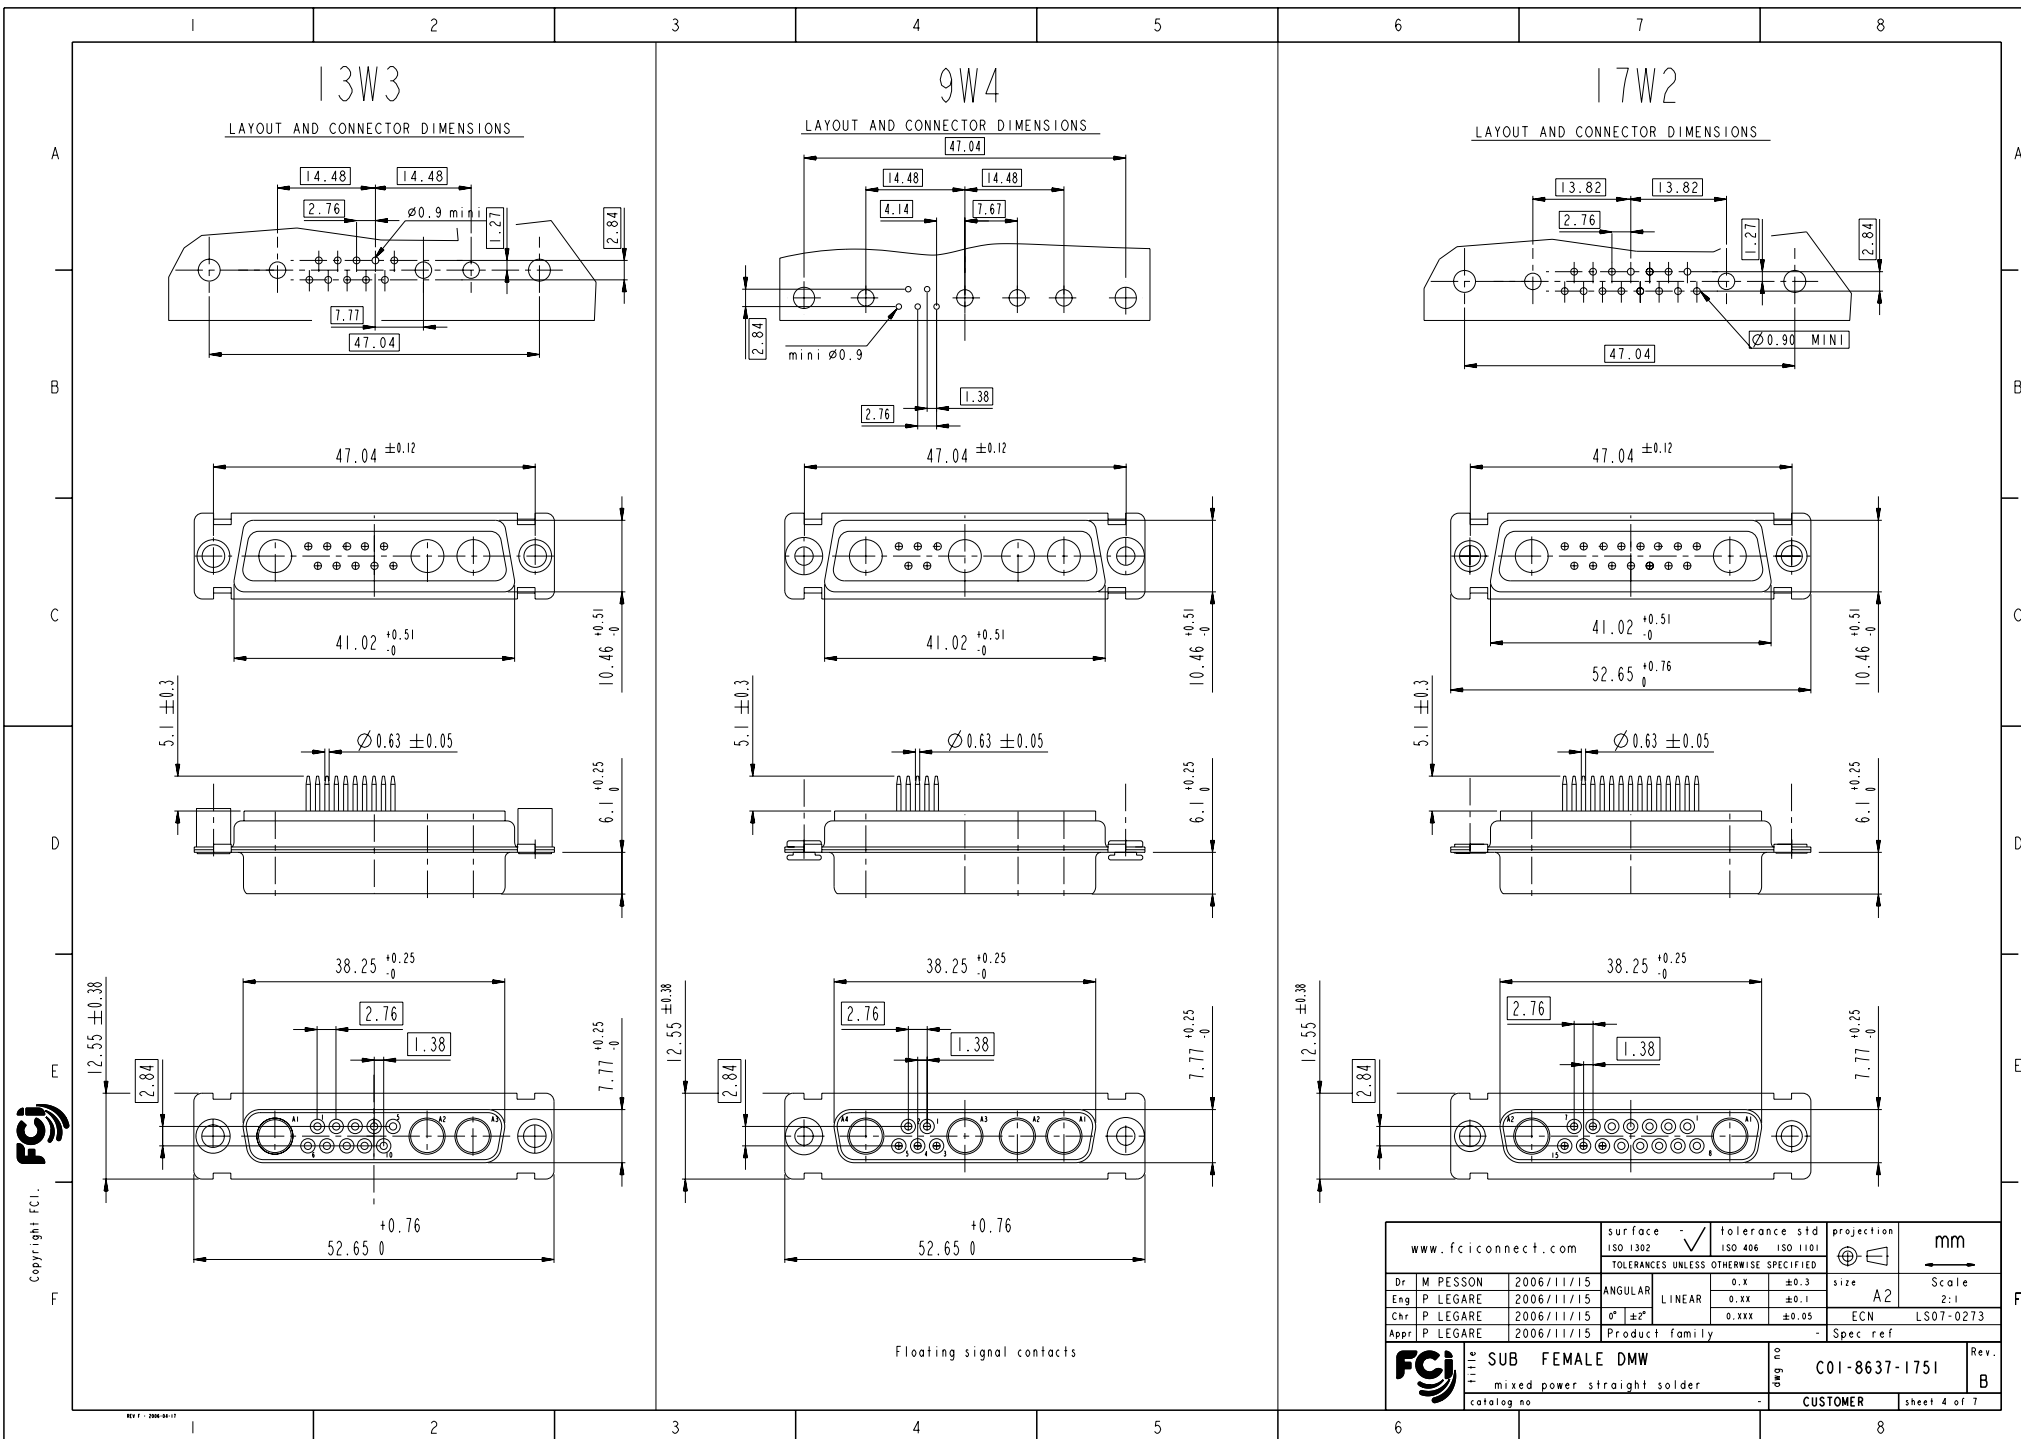

LAYOUT AND CONNECTOR DIMENSIONS

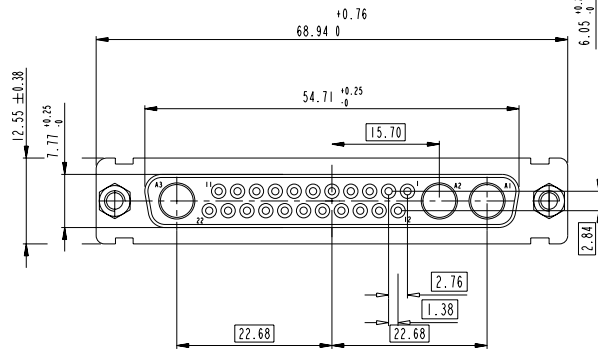

LAYOUT AND CONNECTOR DIMENSIONS

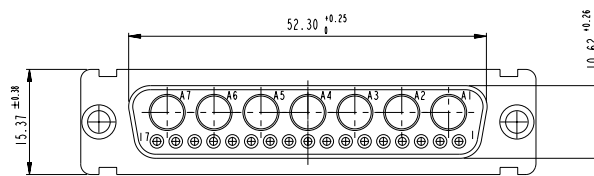

Technical drawing of a mechanical part showing a dimension of $10.64^{+0.52}_{-0}$.

PDM: Rev: B STATUS: **Released** Printed: Jun 18, 2015

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru