

440L, 30LV, 30LVS, 25Y, 125L, 20VL Series




Vishay Cera-Mite

AC Line Rated Disc Capacitors

X & Y EMI/RFI FILTER TYPES: ACROSS-THE-LINE, LINE-BY-PASS, ANTENNA COUPLING

Vishay Cera-Mite AC Line Rated Discs are rugged, high voltage capacitors specifically designed and tested for use on 125 Volt through 600 Volt AC power sources. Certified to meet demanding X & Y type worldwide safety agency requirements, they are applied in across-the-line, line-to-ground, and line-by-pass filtering applications. Vishay Cera-Mite offers the most complete selection in the industry—six product families—exactly tailored to your needs.

- Worldwide Safety Agency Recognition
 - Underwriters Laboratories - UL1414 & UL1283
 - Canadian Standards Association - CSA 22.2 No. 1 & No. 8
 - European EN132400 to IEC 384-14 Second Edition
- Required In AC Power Supply and Filter Applications
- Six Families Tailored To Specific Industry Requirements
- Complete Range of Capacitance Values



AC LINE RATED CERAMIC CAPACITOR SPECIFICATIONS

| PERFORMANCE DATA / SERIES: | 440L | 30LV | 30LVS | 25Y | 125L | 20VL |
|--|--|---------|---------|---------|------|------|
| Application Voltage Range (Vrms 50/60 Hz) (Note 1) | 250/500 | 300/400 | 250/400 | 250/400 | 250 | 250 |
| Dielectric Strength (Vrms 50/60 Hz for 1 minute) | 4000 | 2500 | 2500 | 2500 | 2000 | 1250 |
| Dissipation Factor (Maximum) | 2% | | | | | |
| Insulation Resistance (Minimum) | 1000 ΩF | | | | | |
| Mechanical Data | Service Temperature 125°C Maximum; Coating Material per UL94V0 | | | | | |
| Temperature Characteristics | Y5U | Y5U | Y5U | Y5S | Y5V | Y5V |
| | See Part Number Detail for Temperature Characteristics | | | | | |

SAFETY AGENCY RECOGNITION AND EMI/RFI FILTERING SUBCLASS

| Series / Recognition / Voltage | 440L | 30LV | 30LVS | 25Y | 125L | 20VL |
|--|----------------------------------|------------------------|------------------------|------------------------|------------------------|-----------------------|
| Underwriters Laboratories Inc.: (Note 2) | | | | | | |
| UL 1414 Across-The-Line | Across-The-Line | Across-The-Line | — | — | — | — |
| UL 1414 Antenna Coupling | Antenna-Coupling | Antenna-Coupling | — | — | — | — |
| UL 1414 Line-By-Pass | Line-By-Pass | Line-By-Pass | Line-By-Pass | Line-By-Pass | Line-By-Pass | — |
| UL 1414 Rated Voltage | 250 VAC | 250 VAC | 250 VAC | 250 VAC | 250 VAC | — |
| Electromagnetic Interference Filters | EMI Filters | EMI Filters | EMI Filters | EMI Filters | — | EMI Filters |
| UL1283 Rated Voltage | 600 VAC | 250 VAC | 250 VAC | 250 VAC | — | 250 VAC |
| Canadian Standards Association: | | | | | | |
| CSA 22.2 No.1 Across-The-Line | Across-The-Line | Across-The-Line | — | — | — | — |
| CSA 22.2 No.1 Isolation | Isolation | Isolation | Isolation | Isolation | Isolation | — |
| CSA 22.2 No. 1 Rated Voltage | 250 VAC | 250 VAC | 250 VAC | 250 VAC | 125/250 VAC | — |
| CSA 22.2 No. 8 Line-to-Ground Capacitors | — | Line-To-Ground | Line-To-Ground | Line-To-Ground | — | Line-To-Ground |
| For Use in Certified EMI Filters | — | Certified EMI Filters | Certified EMI Filters | Certified EMI Filters | — | Certified EMI Filters |
| CSA 22.2 No. 8 Rated Voltage | — | 400 VAC | 400 VAC | 400 VAC | — | 250 VAC |
| European CENELEC Electronic Components Committee (CECC) EN 132 400 to Publication IEC 384-14 Table II, Edition 2: | | | | | | |
| IEC 384-14 Second Edition Subclass Y: (Note 3) | Y1 | Y2 | Y2 | Y2 | Y4 | — |
| Subclass Y Voltage (Vrms 50-60 Hz) | 500 VAC | 300 VAC | 250 VAC | 250 VAC | 125 VAC | — |
| Type of Insulation Bridged | Double or Reinforced | Basic or Supplementary | Basic or Supplementary | Basic or Supplementary | Basic or Supplementary | — |
| Peak Impulse Voltage Before Endurance Test | 8 kV | 5 kV | 5 kV | 5 kV | 2.5 kV | — |
| IEC 384-14 Second Edition Subclass X: (Note 4) | X1 | X1 | X1 | X1 | X1 | X2 |
| Subclass X Voltage (Vrms 50-60 Hz) | 400 VAC | 400 VAC | 400 VAC | 400 VAC | 400 VAC | 400 VAC |
| Peak Impulse Voltage in Service | 2.5 to 4.0 kV | 2.5 to 4.0 kV | 2.5 to 4.0 kV | 2.5 to 4.0 kV | 2.5 to 4.0 kV | To 2.5 kV |
| Application | High Pulse | High Pulse | High Pulse | High Pulse | High Pulse | Gen. Purpose |
| Damp Heat, Steady State Recognition | Code HKF - 25°C/ + 125°C/21 days | | | | | |

Note 1

Voltage Ratings: All ratings are manufacturer's rating.

- Part markings are governed by agency rules and customer requirements.
- Parts are marked 250 VAC unless otherwise requested.

Note 2

UL1414 Across-The-Line, Antenna Coupling, and Line-By-Pass Capacitors:

- Across-The-Line—A capacitor connected either across a supply circuit or between one side of a supply circuit and a conductive part that may be connected to earth ground.
- Antenna-Coupling—A capacitor connected from an antenna terminal to circuits within an appliance.
- Line-By-Pass—A capacitor connected between one side of a supply circuit and an accessible conductive part.

Note 3

IEC 384-14 Subclass Y Capacitors:

- A capacitor of a type suitable for use in situations where failure of the capacitor could lead to danger of electric shock.
- Class Y capacitors are divided into sub-classes based on type of insulation bridged and voltage ranges.
- For definitions of basic, supplementary, double and reinforced insulation, see IEC Publication 536.
- Subclass Y capacitors may be used in applications which require a Subclass X rating.

Note 4

IEC 384-14 Subclass X Capacitors:

- A capacitor of a type suitable for use in situations where failure of the capacitor would not lead to danger of electric shock.

- Class X capacitors are divided into subclasses according to the peak impulse test voltage superimposed on the main voltage

Note 5

AC Leakage Current:

- For all Series (except 125L) - AC Leakage Current (mA) specified at 250 Vrms, 60 Hz.
- For 125L Series - AC Leakage Current (mA) specified at 125 Vrms, 60Hz.

Note 6

Alternate Lead Spacings of 7.5mm and 10mm are available bulk or tape & reel.

- European Required Minimum Lead Clearance (Prevents Use of Inside Crimp) .315" (8mm) on 440L Series; 0.118" (3mm) on all other series.



440L, 30LV, 30LVS, 25Y, 125L, 20VL Series

AC Line Rated Disc Capacitors

Vishay Cera-Mite

INTERNATIONAL AGENCY APPROVALS



Fig 5


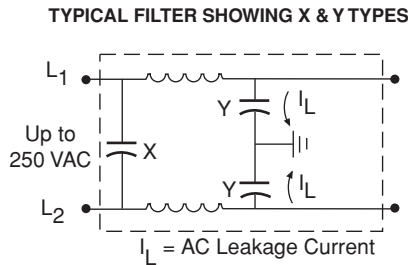


Fig 6

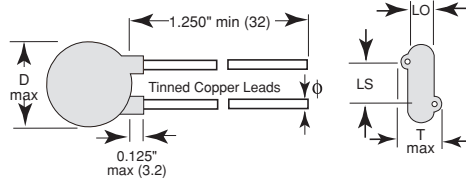

WIRE LEAD OFFSET

| Series | "LO" typ. in | mm |
|--------|--------------|-------|
| 440L | .158" | (4.0) |
| 30LV | .132" | (3.4) |
| 30LVS | .125" | (3.2) |
| 25Y | .060" | (1.5) |
| 125L | .110" | (2.8) |
| 20VL | .077" | (2.0) |

440L SERIES AC RATED CERAMIC DISC CAPACITORS

Rugged, High Dielectric Strength, Full UL Recognition, X1 & Y1 Applications

| UL 1414 | UL 1283 | CSA 22.2 | IEC 384-14 |
|------------------|-------------|-------------------------|--------------------|
| Across-The-Line | EMI Filters | No. 1 - Across-The-Line | 2nd Edition |
| Antenna Coupling | | No. 1 - Isolation | Y1 - 500 VAC |
| Line-By-Pass | | | X1 - 400 VAC |

30LV SERIES AC RATED CERAMIC DISC CAPACITORS

Full UL 1414 Recognition, X1 & Y2 Applications

| UL 1414 | UL 1283 | CSA 22.2 | IEC 384-14 |
|------------------|-------------|-------------------------|--------------------|
| Across-The-Line | EMI Filters | No. 1 - Across-The-Line | 2nd Edition |
| Antenna Coupling | | No. 1 - Isolation | Y2 - 300 VAC |
| Line-By-Pass | | No. 8 - EMI Filters | X1 - 400 VAC |

| VALUE pF | TOL | VISHAY CERA-MITE NUMBER | AC LEAKAGE I _L mA | TEMP CHAR. | D DIAMETER (in/mm) | T THICKNESS (in/mm) | LS LEAD SPACE (in/mm) | φ WIRE SIZE (AWG/in/mm) |
|----------|-----|-------------------------|------------------------------|------------|--------------------|---------------------|-----------------------|-------------------------|
| 10 | K | 440LQ10 | 1.3 uA | COG | .330 (8.4) | .195 (5.0) | .375 (9.5) | 20 .032 (.81) |
| 15 | K | 440LQ15 | 2.0 uA | U2J | .330 (8.4) | .210 (5.3) | .375 (9.5) | 20 .032 (.81) |
| 22 | K | 440LQ22 | 3.0 uA | P3K | .330 (8.4) | .190 (4.8) | .375 (9.5) | 20 .032 (.81) |
| 33 | K | 440LQ33 | 4.4 uA | R3L | .330 (8.4) | .200 (5.1) | .375 (9.5) | 20 .032 (.81) |
| 47 | K | 440LQ47 | 6.3 uA | R3L | .330 (8.4) | .180 (4.6) | .375 (9.5) | 20 .032 (.81) |
| 68 | K | 440LQ68 | 0.01 | X7R | .330 (8.4) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 100 | K | 440LT10 | 0.02 | X7R | .330 (8.4) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 150 | K | 440LT15 | 0.03 | X7R | .330 (8.4) | .235 (6.0) | .375 (9.5) | 20 .032 (.81) |
| 220 | K | 440LT22 | 0.04 | X7R | .330 (8.4) | .235 (6.0) | .375 (9.5) | 20 .032 (.81) |
| 330 | K | 440LT33 | 0.05 | X7R | .330 (8.4) | .225 (5.7) | .375 (9.5) | 20 .032 (.81) |
| 470 | M | 440LT47 | 0.07 | Y5U | .330 (8.4) | .230 (5.8) | .375 (9.5) | 20 .032 (.81) |
| 560 | M | 440LT56 | 0.08 | Y5U | .330 (8.4) | .230 (5.8) | .375 (9.5) | 20 .032 (.81) |
| 680 | M | 440LT68 | 0.10 | Y5U | .330 (8.4) | .235 (6.0) | .375 (9.5) | 20 .032 (.81) |
| 1000 | M | 440LD10 | 0.15 | Y5U | .365 (9.3) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 1500 | M | 440LD15 | 0.23 | Y5U | .365 (9.3) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 2000 | M | 440LD20 | 0.30 | Y5U | .400 (10.2) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 2200 | M | 440LD22 | 0.34 | Y5U | .430 (10.9) | .225 (5.7) | .375 (9.5) | 20 .032 (.81) |
| 2700 | M | 440LD27 | 0.41 | Y5U | .460 (11.7) | .225 (5.7) | .375 (9.5) | 20 .032 (.81) |
| 2800 | M | 440LD28 | 0.43 | Y5U | .460 (11.7) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 3000 | M | 440LD30 | 0.46 | Y5U | .490 (12.4) | .225 (5.7) | .375 (9.5) | 20 .032 (.81) |
| 3200 | M | 440LD32 | 0.49 | Y5U | .490 (12.4) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 3300 | M | 440LD33 | 0.50 | Y5U | .490 (12.4) | .215 (5.5) | .375 (9.5) | 20 .032 (.81) |
| 3900 | M | 440LD39 | 0.59 | Y5U | .530 (13.5) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 4000 | M | 440LD40 | 0.61 | Y5U | .530 (13.5) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 4700 | M | 440LD47 | 0.71 | Y5U | .620 (15.7) | .230 (5.8) | .375 (9.5) | 20 .032 (.81) |
| 5000 | M | 440LD50 | 0.76 | Y5U | .620 (15.7) | .225 (5.7) | .375 (9.5) | 20 .032 (.81) |
| 5500 | M | 440LD55 | 0.84 | Y5U | .680 (17.3) | .230 (5.8) | .375 (9.5) | 20 .032 (.81) |
| 5600 | M | 440LD56 | 0.85 | Y5U | .680 (17.3) | .230 (5.8) | .375 (9.5) | 20 .032 (.81) |
| 6800 | M | 440LD68 | 1.04 | Y5U | .720 (18.3) | .235 (6.0) | .375 (9.5) | 20 .032 (.81) |
| 8000 | M | 440LD80 | 1.22 | Y5U | .720 (18.3) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 9000 | M | 440LD90 | 1.37 | Y5U | .790 (20.1) | .225 (5.7) | .375 (9.5) | 20 .032 (.81) |
| .01µF | M | 440LS10 | 1.52 | Y5U | .850 (21.6) | .230 (5.8) | .375 (9.5) | 20 .032 (.81) |

Note 5

Note 6

| VALUE pF | TOL | VISHAY CERA-MITE NUMBER | AC LEAKAGE I _L mA | TEMP CHAR. | D DIAMETER (in/mm) | T THICKNESS (in/mm) | LS LEAD SPACE (in/mm) | F WIRE SIZE (AWG/in/mm) |
|----------|-----|-------------------------|------------------------------|------------|--------------------|---------------------|-----------------------|-------------------------|
| 10 | K | 30LVQ10 | 1.3 uA | COG | .330 (8.4) | .185 (4.7) | .250 (6.4) | 22 .025 (.64) |
| 15 | K | 30LVQ15 | 2.0 uA | U2J | .330 (8.4) | .200 (5.1) | .250 (6.4) | 22 .025 (.64) |
| 22 | K | 30LVQ22 | 3.0 uA | P3K | .330 (8.4) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 33 | K | 30LVQ33 | 4.4 uA | R3L | .330 (8.4) | .190 (4.8) | .250 (6.4) | 22 .025 (.64) |
| 47 | K | 30LVQ47 | 6.3 uA | R3L | .330 (8.4) | .170 (4.3) | .250 (6.4) | 22 .025 (.64) |
| 68 | K | 30LVQ68 | 0.01 | S3L | .330 (8.4) | .175 (4.4) | .250 (6.4) | 22 .025 (.64) |
| 100 | K | 30LVT10 | 0.02 | X7R | .330 (8.4) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 150 | K | 30LVT15 | 0.03 | X7R | .330 (8.4) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 220 | K | 30LVT22 | 0.04 | X7R | .330 (8.4) | .195 (5.0) | .250 (6.4) | 22 .025 (.64) |
| 330 | K | 30LVT33 | 0.05 | X7R | .330 (8.4) | .195 (5.0) | .250 (6.4) | 22 .025 (.64) |
| 470 | K | 30LVT47 | 0.08 | X7R | .330 (8.4) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 560 | K | 30LVT56 | 0.09 | X7R | .330 (8.4) | .200 (5.1) | .250 (6.4) | 22 .025 (.64) |
| 680 | K | 30LVT68 | 0.11 | X7R | .330 (8.4) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 680 | M | 30LVT68 | 0.10 | Y5U | .330 (8.4) | .220 (5.6) | .250 (6.4) | 22 .025 (.64) |
| 1000 | K | 30LVD10 | 0.16 | X7R | .365 (9.3) | .185 (4.7) | .250 (6.4) | 22 .025 (.64) |
| 1000 | M | 30LVD10 | 0.15 | Y5U | .330 (8.4) | .215 (5.5) | .250 (6.4) | 22 .025 (.64) |
| 1500 | K | 30LVD15 | 0.24 | X7R | .460 (11.7) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 1500 | M | 30LVD15 | 0.23 | Y5U | .330 (8.4) | .195 (5.0) | .250 (6.4) | 22 .025 (.64) |
| 2000 | M | 30LVD20 | 0.31 | Y5U | .400 (10.2) | .210 (5.3) | .250 (6.4) | 22 .025 (.64) |
| 2200 | M | 30LVD22 | 0.34 | Y5U | .400 (10.2) | .200 (5.1) | .250 (6.4) | 22 .025 (.64) |
| 2700 | M | 30LVD27 | 0.41 | Y5U | .430 (10.9) | .200 (5.1) | .250 (6.4) | 22 .025 (.64) |
| 2800 | M | 30LVD28 | 0.43 | Y5U | .430 (10.9) | .200 (5.1) | .250 (6.4) | 22 .025 (.64) |
| 3000 | M | 30LVD30 | 0.46 | Y5U | .460 (11.7) | .205 (5.2) | .250 (6.4) | 22 .025 (.64) |
| 3200 | M | 30LVD32 | 0.49 | Y5U | .460 (11.7) | .200 (5.1) | .250 (6.4) | 22 .025 (.64) |
| 3300 | M | 30LVD33 | 0.50 | Y5U | .460 (11.7) | .195 (5.0) | .250 (6.4) | 22 .025 (.64) |
| 3900 | M | 30LVD39 | 0.59 | Y5U | .490 (12.4) | .200 (5.1) | .250 (6.4) | 22 .025 (.64) |
| 4000 | M | 30LVD40 | 0.61 | Y5U | .530 (13.5) | .210 (5.3) | .250 (6.4) | 22 .025 (.64) |
| 4700 | M | 30LVD47 | 0.72 | Y5U | .620 (15.7) | .220 (5.6) | .375 (9.5) | 20 .032 (.81) |
| 5000 | M | 30LVD50 | 0.76 | Y5U | .620 (15.7) | .215 (5.5) | .375 (9.5) | 20 .032 (.81) |
| 5500 | M | 30LVD55 | 0.84 | Y5U | .560 (14.2) | .195 (5.0) | .375 (9.5) | 20 .032 (.81) |
| 5600 | M | 30LVD56 | 0.85 | Y5U | .560 (14.2) | .195 (5.0) | .375 (9.5) | 20 .032 (.81) |
| 6800 | M | 30LVD68 | 1.04 | Y5U | .680 (17.3) | .205 (5.2) | .375 (9.5) | 20 .032 (.81) |
| 8000 | M | 30LVD80 | 1.22 | Y5U | .680 (17.3) | .195 (5.0) | .375 (9.5) | 20 .032 (.81) |
| 9000 | M | 30LVD90 | 1.37 | Y5U | .720 (18.3) | .200 (5.1) | .375 (9.5) | 20 .032 (.81) |
| .01µF | M | 30LVS10 | 1.52 | Y5U | .790 (20.1) | .190 (4.8) | .375 (9.5) | 20 .032 (.81) |
| .015µF | M | 30LVS15* | 2.28 | Y5U | .900 (22.9) | .200 (5.1) | .375 (9.5) | 20 .032 (.81) |


Note 5

Note 6

* 30LVS15 not available with UL 1414 recognition.

Fig 7 Optional 3-Leaded Style

An optional 3-leaded construction is available. It consists of a single capacitor with the two outside leads attached to one electrode, and the center lead attached to the other electrode. Used in feed-thru or line-to-ground applications, it allows a short ground lead for enhanced high frequency performance.



440L, 30LV, 30LVS, 25Y, 125L, 20VL Series



Vishay Cera-Mite

AC Line Rated Disc Capacitors

INTERNATIONAL SAFETY AGENCY APPROVALS

| Agency Files/ Licenses | 440L | 30LV | 30LVS | 25Y | 125L | 20VL |
|--|--------------|--------------|--------------|--------------|--------------|--------------|
| Underwriters Laboratories Inc. | | | | | | |
| UL 1414 Antenna-Coupling Components | E99264 | E99264 | — | — | — | — |
| UL 1414 Line-By-Pass Components | — | — | E99264 | E99264 | E99264 | — |
| UL 1283 Electromagnetic Interference Filters | E128046 | E99264 | E128046 | E99264 | — | E128046 |
| Canadian Standards Association: | | | | | | |
| CSA 22.2 No.1 Across-The-Line, Isolation | LR62016 | LR62016 | — | — | — | — |
| CSA 22.2 No.1 Isolation | — | — | LR62016 | LR62016 | LR62016 | — |
| CSA 22.2 No. 8 EMI Filters | — | LR62016 | LR62016 | LR62016 | — | LR62016 |
| European CENELEC Electronic Components Committee (CECC) | | | | | | |
| Country Certifications: | | | | | | |
| Specification EN 132 400 to Publication IEC 384-14 Table 11, Edition 2 (1993) | | | | | | |
| VDE | 14239 - 4670 | 14239 - 4670 | 14239 - 4670 | 14239 - 4670 | 14239 - 4670 | 14239 - 4670 |
| SEV | 95,771173 | 95,771173 | 95,771173 | 95,771173 | 95,771173 | 95,771173 |
| SEMKO | 954311001 | 961416201 | 961416301 | 954311601 | 954310601 | 9543108801 |
| NEMKO | P95104257 | P96101228 | P96101227 | P95104253 | P95104252 | P95104254 |
| DEMKO | 304885 | 304886 | 304887 | 304883 | 304882 | 304884 |
| FIMKO | 187550 - 01 | 190061 - 01 | 190059 - 01 | 187547 - 01 | 187548 - 01 | 187549 - 01 |

30LVS SERIES AC RATED CERAMIC DISC CAPACITORS

Compact Size for EMI Filtering, X1 & Y2 Applications

| | | | |
|----------------|----------------|---------------------|--------------------|
| <u>UL 1414</u> | <u>UL 1283</u> | <u>CSA 22.2</u> | <u>IEC 384-1</u> |
| Line-By-Pass | EMI Filters | No. 1 - Isolation | <u>2nd Edition</u> |
| | | No. 8 - EMI Filters | Y2 - 250 VAC |
| | | | X1 - 400 VAC |

25Y SERIES AC RATED CERAMIC DISC CAPACITORS

Temperature Stable Y5S (-30°C to +85°C ±22%),

| | | | |
|----------------|----------------|---------------------|--------------------|
| <u>UL 1414</u> | <u>UL 1283</u> | <u>CSA 22.2</u> | <u>IEC 384-14</u> |
| Line-By-Pass | EMI Filters | No. 1 - Isolation | <u>2nd Edition</u> |
| | | No. 8 - EMI Filters | Y2 - 250 VAC |
| | | | X1 - 400 VAC |

| VALUE pF | TOL | VISHAY CERA-MITE NUMBER | AC LEAK. I _L mA | TEMP CHAR. | D DIAMETER (in/mm) | T THICK. (in/mm) | LS LEAD SPACE (in/mm) | F WIRE SIZE (AWG/in/mm) |
|-------------|-----|-------------------------------|----------------------------------|---------------|--------------------------|------------------------|-----------------------------|-------------------------------|
| 1000 | M | 30LVSD10 | 0.15 | Y5U | .330 (8.4) | .195 (5.0) | .250 (6.4) | 22 .025 (.64) |
| 1500 | M | 30LVSD15 | 0.23 | Y5U | .330 (8.4) | .185 (4.7) | .250 (6.4) | 22 .025 (.64) |
| 2000 | M | 30LVSD20 | 0.31 | Y5U | .330 (8.4) | .175 (4.4) | .250 (6.4) | 22 .025 (.64) |
| 2200 | M | 30LVSD22 | 0.34 | Y5U | .330 (8.4) | .170 (4.3) | .250 (6.4) | 22 .025 (.64) |
| 2700 | M | 30LVSD27 | 0.41 | Y5U | .365 (9.3) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 2800 | M | 30LVSD28 | 0.43 | Y5U | .365 (9.3) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 3000 | M | 30LVSD30 | 0.46 | Y5U | .400 (10.2) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 3200 | M | 30LVSD32 | 0.49 | Y5U | .400 (10.2) | .175 (4.4) | .250 (6.4) | 22 .025 (.64) |
| 3300 | M | 30LVSD33 | 0.50 | Y5U | .400 (10.2) | .175 (4.4) | .250 (6.4) | 22 .025 (.64) |
| 3900 | M | 30LVSD39 | 0.59 | Y5U | .460 (11.7) | .185 (4.7) | .250 (6.4) | 22 .025 (.64) |
| 4000 | M | 30LVSD40 | 0.61 | Y5U | .490 (12.4) | .185 (4.7) | .250 (6.4) | 22 .025 (.64) |
| 4700 | M | 30LVSD47 | 0.72 | Y5U | .490 (12.4) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 4700 | M | 30LVSD47 | 0.72 | Y5V | .430 (10.9) | .185 (4.7) | .250 (6.4) | 22 .025 (.64) |
| 5000 | M | 30LVSD50 | 0.76 | Y5U | .530 (13.5) | .180 (4.6) | .250 (6.4) | 22 .025 (.64) |
| 5500 | M | 30LVSD55 | 0.84 | Y5U | .530 (13.5) | .185 (4.7) | .250 (6.4) | 22 .025 (.64) |
| 6800 | M | 30LVSD68 | 1.04 | Y5U | .620 (15.7) | .200 (5.1) | .375 (9.5) | 20 .032 (.81) |
| .010μF | M | 30LVSS10 | 1.52 | Y5U | .720 (18.3) | .200 (5.1) | .375 (9.5) | 20 .032 (.81) |
| .010μF | M | 30LVSVS10 | 1.52 | Y5V | .620 (15.7) | .200 (5.1) | .375 (9.5) | 20 .032 (.81) |

Note 5

Note 6

125L SERIES AC RATED CERAMIC DISC CAPACITORS

Economical, Line-by-Pass, X1 & Y4 Applications

| | | |
|----------------|-------------------|-------------------------------|
| <u>UL 1414</u> | <u>CSA 22.2</u> | <u>IEC 384-14 2nd Edition</u> |
| Line-By-Pass | No. 1 - Isolation | Y4 - 125 VAC |
| | | X1 - 400 VAC |

| VALUE pF | TOL | VISHAY CERA-MITE NUMBER | AC LEAK. I _L mA | TEMP CHAR. | D DIAMETER (in/mm) | T THICKNESS (in/mm) | LS LEAD SPACE (in/mm) | φ WIRE SIZE (AWG/in/mm) |
|-------------|-----|-------------------------------|----------------------------------|---------------|--------------------------|---------------------------|-----------------------------|-------------------------------|
| 1000 | M | 125LD10 | 0.07 | Y5V | .330 (8.4) | .195 (5.0) | .250 (6.4) | 20 .032 (.81) |
| 1500 | M | 125LD15 | 0.11 | Y5V | .330 (8.4) | .195 (5.0) | .250 (6.4) | 20 .032 (.81) |
| 2000 | M | 125LD20 | 0.15 | Y5V | .330 (8.4) | .185 (4.7) | .250 (6.4) | 20 .032 (.81) |
| 2200 | M | 125LD22 | 0.17 | Y5V | .330 (8.4) | .180 (4.6) | .250 (6.4) | 20 .032 (.81) |
| 3300 | M | 125LD33 | 0.25 | Y5V | .365 (9.3) | .195 (5.0) | .250 (6.4) | 20 .032 (.81) |
| 4700 | M | 125LD47 | 0.36 | Y5V | .400 (10.2) | .185 (4.7) | .250 (6.4) | 20 .032 (.81) |
| 5000 | M | 125LD50 | 0.38 | Y5V | .430 (10.9) | .195 (5.0) | .375 (9.5) | 20 .032 (.81) |
| 6800 | M | 125LD68 | 0.52 | Y5V | .490 (12.4) | .190 (4.8) | .375 (9.5) | 20 .032 (.81) |
| 8200 | M | 125LD82 | 0.63 | Y5V | .530 (13.5) | .190 (4.8) | .375 (9.5) | 20 .032 (.81) |
| .010μF | M | 125LS10 | 0.76 | Y5V | .560 (14.2) | .190 (4.8) | .375 (9.5) | 20 .032 (.81) |
| .015μF | M | 125LS15 | 1.14 | Y5V | .720 (18.3) | .205 (5.2) | .375 (9.5) | 20 .032 (.81) |
| .018μF | M | 125LS18 | 1.37 | Y5V | .790 (20.1) | .205 (5.2) | .375 (9.5) | 20 .032 (.81) |
| .020μF | M | 125LS20 | 1.52 | Y5V | .620 (15.7) | .240 (6.1) | .375 (9.5) | 22 .025 (.64) |
| .022μF | M | 125LS22 | 1.67 | Y5V | .900 (22.9) | .185 (4.7) | .375 (9.5) | 20 .032 (.81) |
| .030μF | M | 125LS30 | 2.28 | Y5V | .720 (18.3) | .240 (6.1) | .375 (9.5) | 22 .025 (.64) |
| .050μF | M | 125LS50 | 3.80 | Y5V | .900 (22.9) | .240 (6.1) | .375 (9.5) | 22 .025 (.64) |

Note 5

Note 6

| VALUE pF | TOL | VISHAY CERA-MITE NUMBER | AC LEAK. I _L mA | TEMP CHAR. | D DIAMETER (in/mm) | T THICKNESS (in/mm) | LS LEAD SPACE (in/mm) | φ WIRE SIZE (AWG/in/mm) |
|-------------|-----|-------------------------------|----------------------------------|---------------|--------------------------|---------------------------|-----------------------------|-------------------------------|
| 1000 | M | 25YD10 | 0.17 | Y5S | .330 (8.4) | .170 (4.3) | .250 (6.4) | 22 .025 (.64) |
| 1500 | M | 25YD15 | 0.25 | Y5S | .400 (10.2) | .175 (4.4) | .250 (6.4) | 22 .025 (.64) |
| 2000 | M | 25YD20 | 0.33 | Y5S | .430 (10.9) | .170 (4.3) | .250 (6.4) | 22 .025 (.64) |
| 2200 | M | 25YD22 | 0.36 | Y5S | .460 (11.7) | .170 (4.3) | .250 (6.4) | 22 .025 (.64) |
| 2700 | M | 25YD27 | 0.45 | Y5S | .490 (12.4) | .170 (4.3) | .250 (6.4) | 22 .025 (.64) |
| 2800 | M | 25YD28 | 0.46 | Y5S | .530 (13.5) | .175 (4.4) | .250 (6.4) | 22 .025 (.64) |
| 3000 | M | 25YD30 | 0.50 | Y5S | .530 (13.5) | .175 (4.4) | .250 (6.4) | 22 .025 (.64) |
| 3200 | M | 25YD32 | 0.53 | Y5S | .560 (14.2) | .185 (4.7) | .375 (9.5) | 20 .032 (.81) |
| 3300 | M | 25YD33 | 0.55 | Y5S | .560 (14.2) | .185 (4.7) | .375 (9.5) | 20 .032 (.81) |
| 3900 | M | 25YD39 | 0.64 | Y5S | .620 (15.7) | .185 (4.7) | .375 (9.5) | 20 .032 (.81) |
| 4000 | M | 25YD40 | 0.66 | Y5S | .620 (15.7) | .185 (4.7) | .375 (9.5) | 20 .032 (.81) |
| 4700 | M | 25YD47 | 0.78 | Y5S | .680 (17.3) | .185 (4.7) | .375 (9.5) | 20 .032 (.81) |
| 5000 | M | 25YD50 | 0.83 | Y5S | .680 (17.3) | .185 (4.7) | .375 (9.5) | 20 .032 (.81) |
| 5500 | M | 25YD55 | 0.91 | Y5S | .720 (18.3) | .190 (4.8) | .375 (9.5) | 20 .032 (.81) |
| 5600 | M | 25YD56 | 0.92 | Y5S | .720 (18.3) | .190 (4.8) | .375 (9.5) | 20 .032 (.81) |
| 6800 | M | 25YD68 | 1.12 | Y5S | .790 (20.1) | .185 (4.7) | .375 (9.5) | 20 .032 (.81) |
| 8000 | M | 25YD80 | 1.32 | Y5S | .900 (22.9) | .200 (5.1) | .375 (9.5) | 20 .032 (.81) |

Note 5

Note 6

20VL SERIES AC RATED CERAMIC DISC CAPACITORS

High Cap Valve, Compact Size, X2 Applications

| | | |
|----------------|---------------------|-------------------------------|
| <u>UL 1283</u> | <u>CSA 22.2</u> | <u>IEC 384-14 2nd Edition</u> |
| EMI Filters | No. 8 - EMI Filters | X2 - 400 VAC |

| VALUE μF | TOL | VISHAY CERA-MITE NUMBER | TEMP CHAR. | D DIAMETER (in/mm) | T THICKNESS (in/mm) | LS LEAD SPACE (in/mm) | φ WIRE SIZE (AWG/in/mm) |
|-------------|-----|-------------------------------|---------------|--------------------------|---------------------------|-----------------------------|-------------------------------|
| .009 | M | 20VLD90 | Y5V | .530 (13.5) | .150 (3.8) | .375 (9.5) | 22 .025 (.64) |
| .010 | M | 20VLS10 | Y5V | .620 (15.7) | .150 (3.8) | .375 (9.5) | 22 .025 (.64) |
| .010 | Z | 20VLS10 | Z5U | .530 (13.5) | .160 (4.1) | .250 (6.4) | 22 .025 (.64) |
| .020 | Z | 20VLS20 | Y5V | .720 (18.3) | .150 (3.8) | .375 (9.5) | 22 .025 (.64) |
| .100 | M | 20VLP10* | Y5V | .940 (23.9) | .240 (6.1) | .375 (9.5) | 22 .025 (.64) |

Note 6

* 20VLP10 not available with CSA 22.2 No. 8 recognition.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru