


TWO IN ONE COMBICON Headers for Through Hole Reflow Processes, 5.08 mm Pitch

With the "TWO IN ONE" solution for COMBICON THR pin strips, it is now possible to have components with a high number of positions, i.e. 12 - 24. The THR pin strip is assembled on the PCB from two segments. The inner side panels have not been added to the segments. This makes room for the housings to be mounted and aligned without contact. After reflow soldering, one has the same properties as with single section pin strips, i.e. plugging remains as convenient as before.

All pin strips are made of high temperature resistant Liquid Crystal Polymer (LCP) and are suitable for use in lead-free solder processes with high peak temperatures.

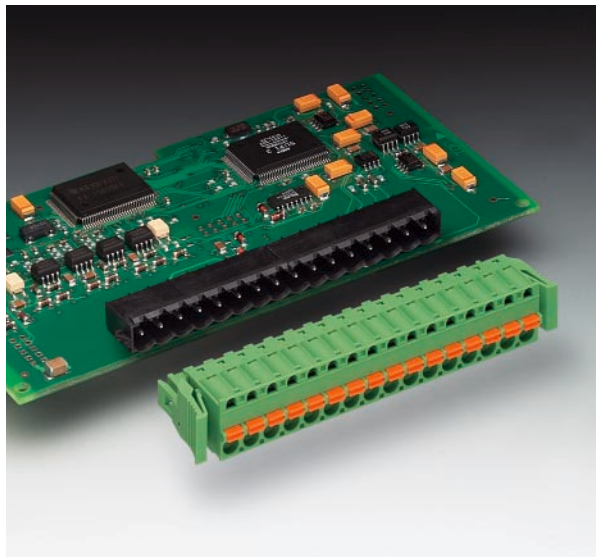

COMBICON Select

The COMBICON search engine with CAD downloading




COMBICON Select – the printed circuit board connection software supports your workflow from the PCB and housing layout to the ordering process with:


- Systematic and fast selection of products
- Universal Internet aided engineering with extensive CAD downloading
- Easy-to-use e-shopping functions.

<http://select.phoenixcontact.com>

CCA 2,5/...-GL(R)-5,08P26THR 5.08 mm Pitch



Bottom view, free space for solder paste, 0.5 mm deep

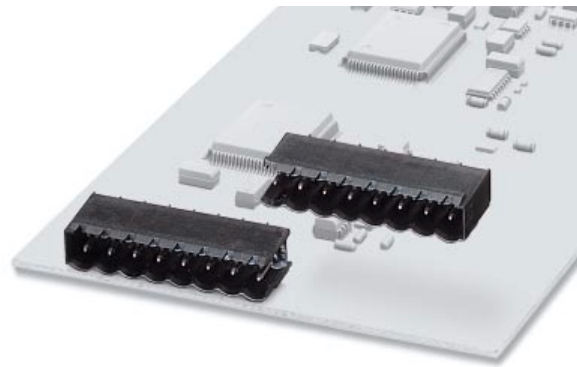

Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Header with panel on one side, plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCA 2,5/6-GL-5,08P26THR	19 59 10 5	50
	7	30.48	CCA 2,5/7-GL-5,08P26THR	19 59 11 8	
	8	35.56	CCA 2,5/8-GL-5,08P26THR	19 59 12 1	
	9	40.64	CCA 2,5/9-GL-5,08P26THR	19 59 13 4	
	10	45.72	CCA 2,5/10-GL-5,08P26THR	19 59 14 7	
	11	50.80	CCA 2,5/11-GL-5,08P26THR	19 59 15 0	
	12	55.88	CCA 2,5/12-GL-5,08P26THR	19 59 16 3	
Header with panel on one side, plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCA 2,5/6-GR-5,08P26THR	19 59 24 4	50
	7	30.48	CCA 2,5/7-GR-5,08P26THR	19 59 25 7	
	8	35.56	CCA 2,5/8-GR-5,08P26THR	19 59 26 0	
	9	40.64	CCA 2,5/9-GR-5,08P26THR	19 59 27 3	
	10	45.72	CCA 2,5/10-GR-5,08P26THR	19 59 28 6	
	11	50.80	CCA 2,5/11-GR-5,08P26THR	19 59 29 9	
	12	55.88	CCA 2,5/12-GR-5,08P26THR	19 59 30 9	
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material			CR-MSTB	17 34 40 1	100
(2) HT coding element , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic			CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)		

Technical data


Dimensions	
Pitch	[mm]
Hole diameter	[mm]
Pin dimensions	[mm]x[mm]

Technical data in accordance with IEC/ DIN VDE


Insulating material group	—
Surge voltage category / contamination class	—/—
Rated voltage	[V]
Rated surge voltage	[kV]
Nominal current / cross section	[A]/[mm ²]
Maximum load current / cross section	[A]/[mm ²]

Insulating material


Inflammability class in acc. with UL 94




CCA 2,5/...-GL-5,08P26THR



CCA 2,5/...-GR-5,08P26THR




CCA 2,5/...-GL-5,08P26THR



CCA 2,5/...-GR-5,08P26THR


CCA 2,5/...-GL(R)-5,08RNP26THR 5.08 mm Pitch



Bottom view, free space for solder paste, 0.5 mm deep

Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

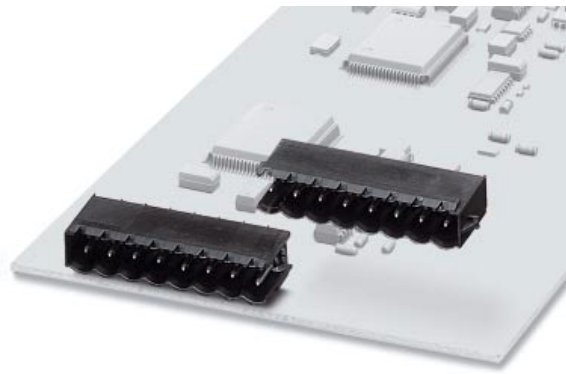

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Header with engagement nose on one side, plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCA 2,5/6-GL-5,08RNP26THR	19 59 38 3	50
	7	30.48	CCA 2,5/7-GL-5,08RNP26THR	19 59 39 6	
	8	35.56	CCA 2,5/8-GL-5,08RNP26THR	19 59 40 6	
	9	40.64	CCA 2,5/9-GL-5,08RNP26THR	19 59 41 9	
	10	45.72	CCA 2,5/10-GL-5,08RNP26THR	19 59 42 2	
	11	50.80	CCA 2,5/11-GL-5,08RNP26THR	19 59 43 5	
Header with engagement nose on one side, plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	12	55.88	CCA 2,5/12-GL-5,08RNP26THR	19 59 44 8	50
	6	25.40	CCA 2,5/6-GR-5,08RNP26THR	19 59 52 9	
	7	30.48	CCA 2,5/7-GR-5,08RNP26THR	19 59 53 2	
	8	35.56	CCA 2,5/8-GR-5,08RNP26THR	19 59 54 5	
	9	40.64	CCA 2,5/9-GR-5,08RNP26THR	19 59 55 8	
	10	45.72	CCA 2,5/10-GR-5,08RNP26THR	19 59 56 1	
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material	11	50.80	CCA 2,5/11-GR-5,08RNP26THR	19 59 57 4	100
	12	55.88	CCA 2,5/12-GR-5,08RNP26THR	19 59 58 7	
			CR-MSTB	17 34 40 1	100
			CR-MSTB NAT HT	19 54 36 2	
			SK 5,08/3,8 (see COMBICON catalog)		

Technical data


Dimensions	
Pitch	[mm]
Hole diameter	[mm]
Pin dimensions	[mm]x[mm]

Technical data in accordance with IEC/ DIN VDE


Insulating material group	—
Surge voltage category / contamination class	—/—
Rated voltage	[V]
Rated surge voltage	[kV]
Nominal current / cross section	[A]/[mm ²]
Maximum load current / cross section	[A]/[mm ²]

Insulating material


Inflammability class in acc. with UL 94




CCA 2,5/...-GL-5,08RNP26THR



CCA 2,5/...-GR-5,08RNP26THR




CCA 2,5/...-GL-5,08RNP26THR



CCA 2,5/...-GR-5,08RNP26THR


CC 2,5/...-GFL(R)-5,08P26THR 5.08 mm Pitch



Bottom view, free space for solder paste, 0.5 mm deep

Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

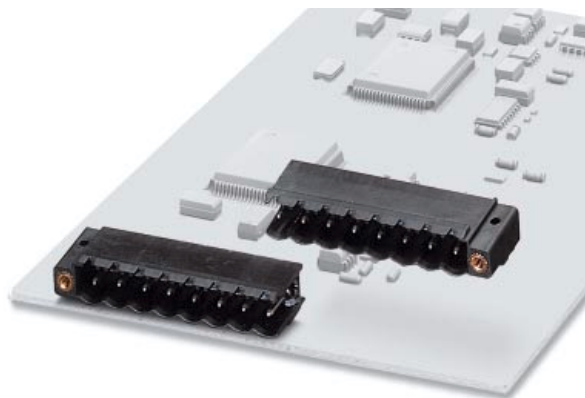

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Header with threaded flange on one side, plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CC 2,5/6-GFL-5,08P26THR	19 56 30 2	50
	7	30.48	CC 2,5/7-GFL-5,08P26THR	19 56 31 5	
	8	35.56	CC 2,5/8-GFL-5,08P26THR	19 56 32 8	
	9	40.64	CC 2,5/9-GFL-5,08P26THR	19 56 33 1	
	10	45.72	CC 2,5/10-GFL-5,08P26THR	19 56 34 4	
	11	50.80	CC 2,5/11-GFL-5,08P26THR	19 56 35 7	
	12	55.88	CC 2,5/12-GFL-5,08P26THR	19 56 36 0	
Header with threaded flange on one side, plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CC 2,5/6-GFR-5,08P26THR	19 56 44 1	50
	7	30.48	CC 2,5/7-GFR-5,08P26THR	19 56 45 4	
	8	35.56	CC 2,5/8-GFR-5,08P26THR	19 56 46 7	
	9	40.64	CC 2,5/9-GFR-5,08P26THR	19 56 47 0	
	10	45.72	CC 2,5/10-GFR-5,08P26THR	19 56 48 3	
	11	50.80	CC 2,5/11-GFR-5,08P26THR	19 56 49 6	
	12	55.88	CC 2,5/12-GFR-5,08P26THR	19 56 50 6	
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material			CR-MSTB	17 34 40 1	100
(2) HT coding element , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic			CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)		

Technical data


Dimensions	
Pitch	[mm]
Hole diameter	[mm]
Pin dimensions	[mm]x[mm]

Technical data in accordance with IEC/ DIN VDE


Insulating material group	—
Surge voltage category / contamination class	—/—
Rated voltage	[V]
Rated surge voltage	[kV]
Nominal current / cross section	[A]/[mm²]
Maximum load current / cross section	[A]/[mm²]

Insulating material


Inflammability class in acc. with UL 94




CC 2,5/...-GFL-5,08P26THR



CC 2,5/...-GFR-5,08P26THR




CC 2,5/...-GFL-5,08P26THR



CC 2,5/...-GFR-5,08P26THR


CCVA 2,5/...-GL(R)-5,08P26THR 5.08 mm Pitch



Bottom view, free space for solder paste, 0.55 mm deep

Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

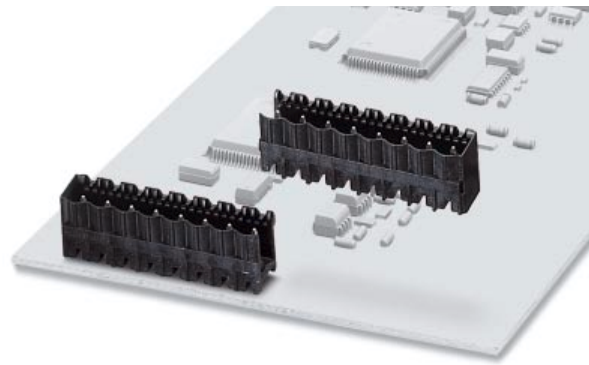

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Header with panel on one side, plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCVA 2,5/6-GL-5,08P26THR	19 59 94 3	50
	7	30.48	CCVA 2,5/7-GL-5,08P26THR	19 59 95 6	
	8	35.56	CCVA 2,5/8-GL-5,08P26THR	19 59 96 9	
	9	40.64	CCVA 2,5/9-GL-5,08P26THR	19 59 97 2	
	10	45.72	CCVA 2,5/10-GL-5,08P26THR	19 59 98 5	
	11	50.80	CCVA 2,5/11-GL-5,08P26THR	19 59 99 8	
	12	55.88	CCVA 2,5/12-GL-5,08P26THR	19 60 00 0	
Header with panel on one side, plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCVA 2,5/6-GR-5,08P26THR	19 60 12 3	50
	7	30.48	CCVA 2,5/7-GR-5,08P26THR	19 60 13 6	
	8	35.56	CCVA 2,5/8-GR-5,08P26THR	19 60 14 9	
	9	40.64	CCVA 2,5/9-GR-5,08P26THR	19 60 15 2	
	10	45.72	CCVA 2,5/10-GR-5,08P26THR	19 60 16 5	
	11	50.80	CCVA 2,5/11-GR-5,08P26THR	19 60 17 8	
	12	55.88	CCVA 2,5/12-GR-5,08P26THR	19 60 18 1	
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material			CR-MSTB	17 34 40 1	100
(2) HT coding element , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic			CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)		

Technical data

Dimensions	
Pitch	[mm]
Hole diameter	[mm]
Pin dimensions	[mm]x[mm]

Technical data in accordance with IEC/ DIN VDE

Insulating material group	—
Surge voltage category / contamination class	—/—
Rated voltage	[V]
Rated surge voltage	[kV]
Nominal current / cross section	[A]/[mm²]
Maximum load current / cross section	[A]/[mm²]

Insulating material


Inflammability class in acc. with UL 94

see description


5.08

1.5


1x1




CCVA 2,5/...-GL-5,08P26THR



CCVA 2,5/...-GR-5,08P26THR




CCVA 2,5/...-GL-5,08P26THR



CCVA 2,5/...-GR-5,08P26THR


CCVA 2,5/...-GL(R)-5,08RNP26THR 5.08 mm Pitch



Bottom view, free space for solder paste, 0.55 mm deep

Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

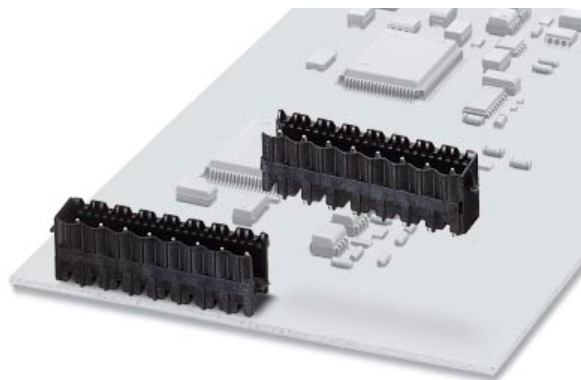

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Header with engagement nose on one side, plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCVA 2,5/6-GL-5,08RNP26THR	19 60 26 2	50
	7	30.48	CCVA 2,5/7-GL-5,08RNP26THR	19 60 27 5	
	8	35.56	CCVA 2,5/8-GL-5,08RNP26THR	19 60 28 8	
	9	40.64	CCVA 2,5/9-GL-5,08RNP26THR	19 60 29 1	
	10	45.72	CCVA 2,5/10-GL-5,08RNP26THR	19 60 31 4	
	11	50.80	CCVA 2,5/11-GL-5,08RNP26THR	19 60 32 7	
Header with engagement nose on one side, plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	12	55.88	CCVA 2,5/12-GL-5,08RNP26THR	19 60 33 0	50
	6	25.40	CCVA 2,5/6-GR-5,08RNP26THR	19 60 41 1	
	7	30.48	CCVA 2,5/7-GR-5,08RNP26THR	19 60 42 4	
	8	35.56	CCVA 2,5/8-GR-5,08RNP26THR	19 60 43 7	
	9	40.64	CCVA 2,5/9-GR-5,08RNP26THR	19 60 44 0	
	10	45.72	CCVA 2,5/10-GR-5,08RNP26THR	19 60 45 3	
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material	11	50.80	CCVA 2,5/11-GR-5,08RNP26THR	19 60 46 6	100
	12	55.88	CCVA 2,5/12-GR-5,08RNP26THR	19 60 47 9	
			CR-MSTB	17 34 40 1	100
(2) HT coding element , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic			CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)		

Technical data

Dimensions	
Pitch	[mm]
Hole diameter	[mm]
Pin dimensions	[mm]x[mm]

Technical data in accordance with IEC/ DIN VDE

Insulating material group	—
Surge voltage category / contamination class	—/—
Rated voltage	[V]
Rated surge voltage	[kV]
Nominal current / cross section	[A]/[mm²]
Maximum load current / cross section	[A]/[mm²]

Insulating material

Inflammability class in acc. with UL 94

see description

5.08

1.5

1x1


III / 3	IIIa	II / 2
250	320	400
4	4	4

12 / —


12 / —

LCP


V0




CCVA 2,5/...-GL-5,08RNP26THR



CCVA 2,5/...-GR-5,08RNP26THR




CCVA 2,5/...-GL-5,08RNP26THR



CCVA 2,5/...-GR-5,08RNP26THR


CCV 2,5/...-GFL(R)-5,08P26THR 5.08 mm Pitch




Bottom view, free space for solder paste, 0.55 mm deep

Note:


COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

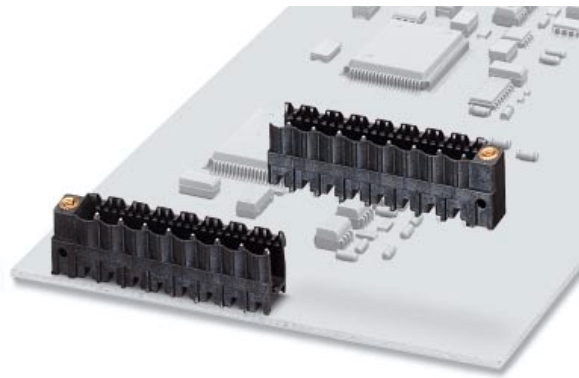


Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Header with threaded flange on one side, plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCV 2,5/6-GFL-5,08P26THR	19 59 66 8	50
	7	30.48	CCV 2,5/7-GFL-5,08P26THR	19 59 67 1	
	8	35.56	CCV 2,5/8-GFL-5,08P26THR	19 59 68 4	
	9	40.64	CCV 2,5/9-GFL-5,08P26THR	19 59 69 7	
	10	45.72	CCV 2,5/10-GFL-5,08P26THR	19 59 70 7	
	11	50.80	CCV 2,5/11-GFL-5,08P26THR	19 59 71 0	
	12	55.88	CCV 2,5/12-GFL-5,08P26THR	19 59 72 3	
Header with threaded flange on one side, plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCV 2,5/6-GFR-5,08P26THR	19 59 80 4	50
	7	30.48	CCV 2,5/7-GFR-5,08P26THR	19 59 81 7	
	8	35.56	CCV 2,5/8-GFR-5,08P26THR	19 59 82 0	
	9	40.64	CCV 2,5/9-GFR-5,08P26THR	19 59 83 3	
	10	45.72	CCV 2,5/10-GFR-5,08P26THR	19 59 84 6	
	11	50.80	CCV 2,5/11-GFR-5,08P26THR	19 59 85 9	
	12	55.88	CCV 2,5/12-GFR-5,08P26THR	19 59 86 2	
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material			CR-MSTB	17 34 40 1	100
(2) HT coding element , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic			CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)		
Technical data			see description		
Dimensions			5.08		
Pitch		[mm]	1.5		
Hole diameter		[mm]	1x1		
Pin dimensions		[mm]x[mm]			
Technical data in accordance with IEC/ DIN VDE					
Insulating material group		-	IIIa		
Surge voltage category / contamination class		-/-	III / 2		
Rated voltage		[V]	250		
Rated surge voltage		[kV]	4		
Nominal current / cross section		[A]/[mm ²]	12 / -		
Maximum load current / cross section		[A]/[mm ²]	12 / -		
Insulating material			LCP		
Inflammability class in acc. with UL 94			V0		




CCV 2,5/...-GFL-5,08P26THR



CCV 2,5/...-GFR-5,08P26THR



CCV 2,5/...-GFL-5,08P26THR




CCV 2,5/...-GFR-5,08P26THR

TWO IN ONE COMBICON headers, taped, 5.08 mm pitch, horizontal and vertical designs

With the "TWO IN ONE" solution for COMBICON THR pin strips, it is now possible to have components with a high number of positions, i.e. 12 - 24. Packaging in accordance with modern industrial standards, particularly tape widths of 56 to 88 mm, remains unchanged. The same processing equipment and familiar requirements for the mounting process, as already apply for pin strips with a low number of positions, facilitate integration in existing production processes.

The THR pin strip is assembled on the PCB from two segments. Each segment is packaged in a tape. The inner side panels have not been added to the segments. This makes room for the housings to be mounted and aligned without contact. After reflow soldering, one has the same properties as with single section pin strips, i.e. plugging remains as convenient as before.

All pin strips are made of high temperature resistant Liquid Crystal Polymer (LCP) and are suitable for use in lead-free solder processes with high peak temperatures.

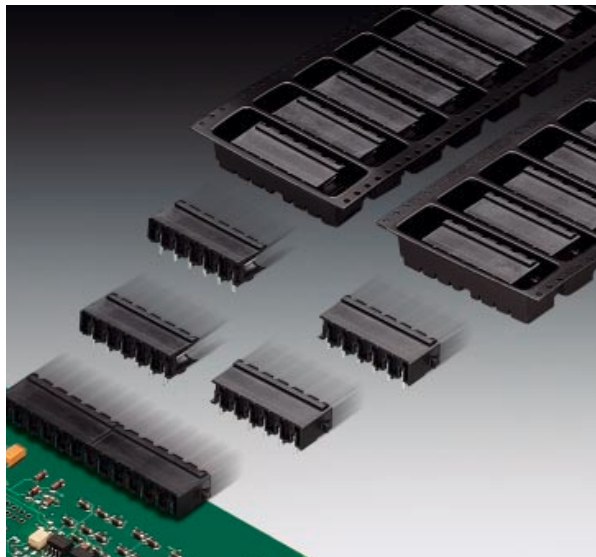

CCA 2,5/...-GL(R)-5,08P26THRR... 5.08 mm Pitch



Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Taped header with panel on one side, plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCA 2,5/6-GL-5,08P26THRR56	19 59 17 6	330
	7	30.48	CCA 2,5/7-GL-5,08P26THRR56	19 59 18 9	330
	8	35.56	CCA 2,5/8-GL-5,08P26THRR56	19 59 19 2	330
	9	40.64	CCA 2,5/9-GL-5,08P26THRR88	19 59 20 2	240
	10	45.72	CCA 2,5/10-GL-5,08P26THRR88	19 59 21 5	240
	11	50.80	CCA 2,5/11-GL-5,08P26THRR88	19 59 22 8	240
	12	55.88	CCA 2,5/12-GL-5,08P26THRR88	19 59 23 1	240
Taped header with panel on one side, plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCA 2,5/6-GR-5,08P26THRR56	19 59 31 2	330
	7	30.48	CCA 2,5/7-GR-5,08P26THRR56	19 59 32 5	330
	8	35.56	CCA 2,5/8-GR-5,08P26THRR56	19 59 33 8	330
	9	40.64	CCA 2,5/9-GR-5,08P26THRR88	19 59 34 1	240
	10	45.72	CCA 2,5/10-GR-5,08P26THRR88	19 59 35 4	240
	11	50.80	CCA 2,5/11-GR-5,08P26THRR88	19 59 36 7	240
	12	55.88	CCA 2,5/12-GR-5,08P26THRR88	19 59 37 0	240
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material					
			CR-MSTB	17 34 40 1	100
(2) HT coding element¹⁾ , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic					
			CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks					
			SK 5,08/3,8 (see COMBICON catalog)		
Technical data			see description		
Dimensions			5.08		
Pitch		[mm]	1.5		
Hole diameter		[mm]	1x1		
Pin dimensions		[mm]x[mm]			
Technical data in accordance with IEC/ DIN VDE					
Insulating material group		–	IIIa		
Surge voltage category / contamination class		–/–	III / 3	III / 2	II / 2
Rated voltage		[V]	250	320	400
Rated surge voltage		[kV]	4	4	4
Nominal current / cross section		[A]/[mm²]	12 / –		
Maximum load current / cross section		[A]/[mm²]	12 / –		
Insulating material			LCP		
Inflammability class in acc. with UL 94			V0		

Dimensional drawings, see page 2

Dimensional drawings of tapes, see page 12.

¹⁾ Precoded taped articles are available on request.

CCA 2,5/...-GL(R)-5,08RNP26THRR... 5.08 mm Pitch



Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Taped header with engagement nose on one side , plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCA 2,5/6-GL-5,08RNP26THRR56	19 59 45 1	330
	7	30.48	CCA 2,5/7-GL-5,08RNP26THRR56	19 59 46 4	330
	8	35.56	CCA 2,5/8-GL-5,08RNP26THRR88	19 59 47 7	240
	9	40.64	CCA 2,5/9-GL-5,08RNP26THRR88	19 59 48 0	240
	10	45.72	CCA 2,5/10-GL-5,08RNP26THRR88	19 59 49 3	240
	11	50.80	CCA 2,5/11-GL-5,08RNP26THRR88	19 59 50 3	240
	12	55.88	CCA 2,5/12-GL-5,08RNP26THRR88	19 59 51 6	240
Taped header with engagement nose on one side , plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCA 2,5/6-GR-5,08RNP26THRR56	19 59 59 0	330
	7	30.48	CCA 2,5/7-GR-5,08RNP26THRR56	19 59 60 0	330
	8	35.56	CCA 2,5/8-GR-5,08RNP26THRR88	19 59 61 3	240
	9	40.64	CCA 2,5/9-GR-5,08RNP26THRR88	19 59 62 6	240
	10	45.72	CCA 2,5/10-GR-5,08RNP26THRR88	19 59 63 9	240
	11	50.80	CCA 2,5/11-GR-5,08RNP26THRR88	19 59 64 2	240
	12	55.88	CCA 2,5/12-GR-5,08RNP26THRR88	19 59 65 5	240
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material			CR-MSTB	17 34 40 1	100
(2) HT coding element¹⁾ , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic			CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)		
Technical data			see description		
Dimensions			5.08		
Pitch		[mm]	1.5		
Hole diameter		[mm]	1x1		
Pin dimensions		[mm]x[mm]			
Technical data in accordance with IEC/ DIN VDE					
Insulating material group		–	IIIa		
Surge voltage category / contamination class		–/–	III / 3	III / 2	II / 2
Rated voltage		[V]	250	320	400
Rated surge voltage		[kV]	4	4	4
Nominal current / cross section		[A]/[mm²]	12 / –		
Maximum load current / cross section		[A]/[mm²]	12 / –		
Insulating material			LCP		
Inflammability class in acc. with UL 94			V0		

Dimensional drawings, see 3

Dimensional drawings of tapes, see page 12.

¹⁾ Precoded taped articles are available on request.

CC 2,5/...-GFL(R)-5,08P26THRR... 5.08 mm Pitch



Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.	
Taped header with threaded flange on one side , plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CC 2,5/6-GFL-5,08P26THRR56	19 56 37 3	330	
	7	30.48	CC 2,5/7-GFL-5,08P26THRR56	19 56 38 6	330	
	8	35.56	CC 2,5/8-GFL-5,08P26THRR88	19 56 39 9	240	
	9	40.64	CC 2,5/9-GFL-5,08P26THRR88	19 56 40 9	240	
	10	45.72	CC 2,5/10-GFL-5,08P26THRR88	19 56 41 2	240	
	11	50.80	CC 2,5/11-GFL-5,08P26THRR88	19 56 42 5	240	
	12	55.88	CC 2,5/12-GFL-5,08P26THRR88	19 56 43 8	240	
Taped header with threaded flange on one side , plug-in direction parallel to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CC 2,5/6-GFR-5,08P26THRR56	19 56 51 9	330	
	7	30.48	CC 2,5/7-GFR-5,08P26THRR56	19 56 52 2	330	
	8	35.56	CC 2,5/8-GFR-5,08P26THRR88	19 56 53 5	240	
	9	40.64	CC 2,5/9-GFR-5,08P26THRR88	19 56 54 8	240	
	10	45.72	CC 2,5/10-GFR-5,08P26THRR88	19 56 55 1	240	
	11	50.80	CC 2,5/11-GFR-5,08P26THRR88	19 56 56 4	240	
	12	55.88	CC 2,5/12-GFR-5,08P26THRR88	19 56 57 7	240	
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material				CR-MSTB	17 34 40 1	100
(2) HT coding element¹⁾ , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic				CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)			
Technical data			see description			
Dimensions			5.08			
Pitch		[mm]	1.5			
Hole diameter		[mm]	1x1			
Pin dimensions		[mm]x[mm]				
Technical data in accordance with IEC/ DIN VDE						
Insulating material group		–	IIIa			
Surge voltage category / contamination class		–/–	III / 3	III / 2	II / 2	
Rated voltage		[V]	250	320	400	
Rated surge voltage		[kV]	4	4	4	
Nominal current / cross section		[A]/[mm²]		12 / –		
Maximum load current / cross section		[A]/[mm²]		12 / –		
Insulating material			LCP			
Inflammability class in acc. with UL 94			V0			

Dimensional drawings, see page 4.


Dimensional drawings of tapes, see page 12.

¹⁾ Precoded taped articles are available on request.


TWO IN ONE COMBICON

Headers, taped, pitch 5.08 mm, horizontal designs


Feeder direction, tape width 56 mm (R56), even nos. of positions

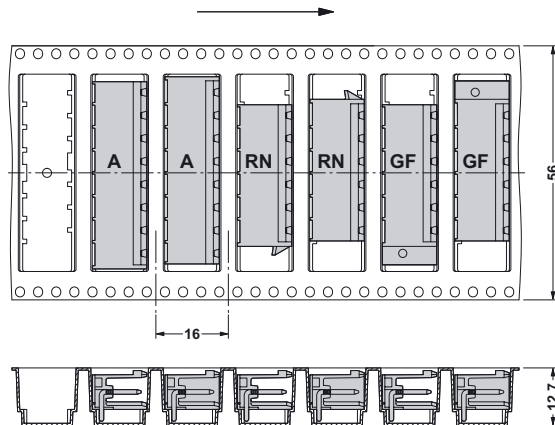


Feeder direction, tape width 56 mm (R56), odd nos. of positions

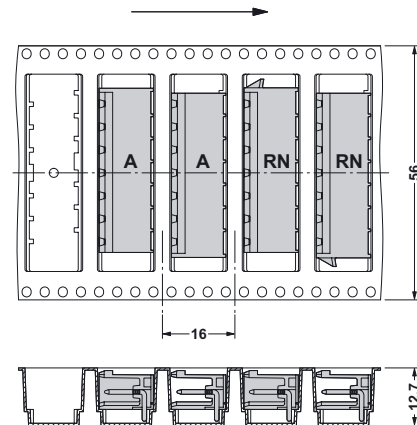

Feeder direction, tape width 88 mm (R88), even nos. of positions

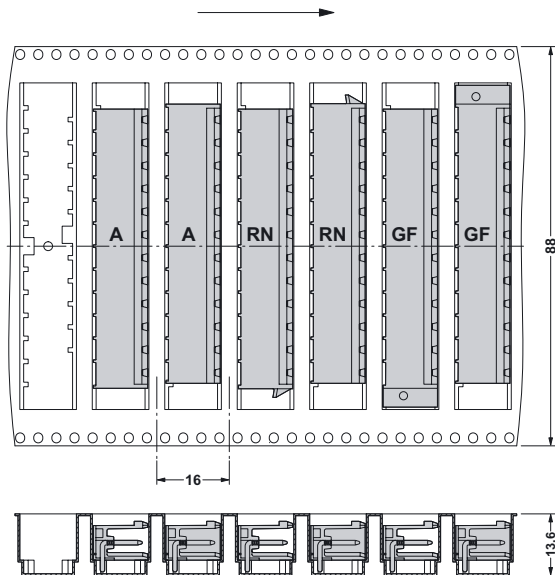

Feeder direction, tape width 88 mm (R88), odd nos. of positions

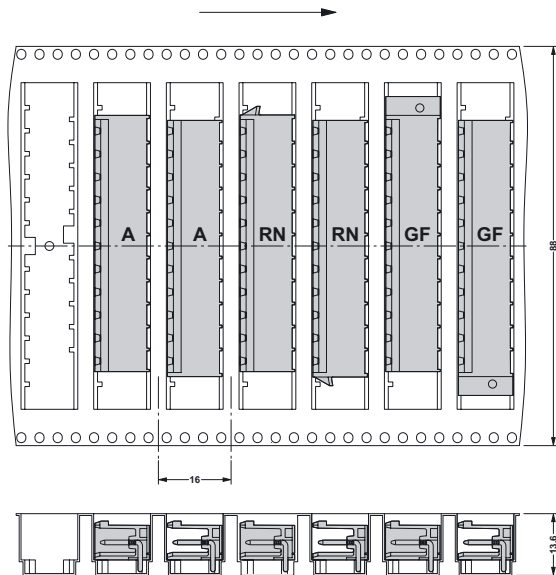

CCVA 2,5/...-GL(R)-5,08P26THRR... 5.08 mm Pitch



Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Taped header with panel on one side, plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCVA 2,5/6-GL-5,08P26THRR56	19 60 04 2	140
	7	30.48	CCVA 2,5/7-GL-5,08P26THRR56	19 60 05 5	
	8	35.56	CCVA 2,5/8-GL-5,08P26THRR56	19 60 06 8	
	9	40.64	CCVA 2,5/9-GL-5,08P26THRR88	19 60 07 1	
	10	45.72	CCVA 2,5/10-GL-5,08P26THRR88	19 60 08 4	
	11	50.80	CCVA 2,5/11-GL-5,08P26THRR88	19 60 09 7	
	12	55.88	CCVA 2,5/12-GL-5,08P26THRR88	19 60 11 0	
Taped header with panel on one side, plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCVA 2,5/6-GR-5,08P26THRR56	19 60 19 4	140
	7	30.48	CCVA 2,5/7-GR-5,08P26THRR56	19 60 20 4	
	8	35.56	CCVA 2,5/8-GR-5,08P26THRR56	19 60 21 7	
	9	40.64	CCVA 2,5/9-GR-5,08P26THRR88	19 60 22 0	
	10	45.72	CCVA 2,5/10-GR-5,08P26THRR88	19 60 23 3	
	11	50.80	CCVA 2,5/11-GR-5,08P26THRR88	19 60 24 6	
	12	55.88	CCVA 2,5/12-GR-5,08P26THRR88	19 60 25 9	
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material					
			CR-MSTB	17 34 40 1	100
(2) HT coding element¹⁾ , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic					
			CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)		
Technical data			see description		
Dimensions			5.08		
Pitch		[mm]	1.5		
Hole diameter		[mm]	1x1		
Pin dimensions		[mm]x[mm]			
Technical data in accordance with IEC/ DIN VDE					
Insulating material group		–	IIIa		
Surge voltage category / contamination class		–/–	III / 3	III / 2	II / 2
Rated voltage		[V]	250	320	400
Rated surge voltage		[kV]	4	4	4
Nominal current / cross section		[A]/[mm²]	12 / –		
Maximum load current / cross section		[A]/[mm²]	12 / –		
Insulating material			LCP		
Inflammability class in acc. with UL 94			V0		

Dimensional drawings, see page 5

Dimensional drawings of tapes, see page 16.

¹⁾ Precoded taped articles are available on request.

CCVA 2,5/...-GL(R)-5,08RNP26THRR... 5.08 mm Pitch



Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
Taped header with engagement nose on one side , plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCVA 2,5/6-GL-5,08RNP26THRR56	19 60 34 3	140
	7	30.48	CCVA 2,5/7-GL-5,08RNP26THRR56	19 60 35 6	
	8	35.56	CCVA 2,5/8-GL-5,08RNP26THRR88	19 60 36 9	
	9	40.64	CCVA 2,5/9-GL-5,08RNP26THRR88	19 60 37 2	
	10	45.72	CCVA 2,5/10-GL-5,08RNP26THRR88	19 60 38 5	
	11	50.80	CCVA 2,5/11-GL-5,08RNP26THRR88	19 60 39 8	
	12	55.88	CCVA 2,5/12-GL-5,08RNP26THRR88	19 60 40 8	
Taped header with engagement nose on one side , plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCVA 2,5/6-GR-5,08RNP26THRR56	19 60 48 2	140
	7	30.48	CCVA 2,5/7-GR-5,08RNP26THRR56	19 60 49 5	
	8	35.56	CCVA 2,5/8-GR-5,08RNP26THRR88	19 60 50 5	
	9	40.64	CCVA 2,5/9-GR-5,08RNP26THRR88	19 60 51 8	
	10	45.72	CCVA 2,5/10-GR-5,08RNP26THRR88	19 60 52 1	
	11	50.80	CCVA 2,5/11-GR-5,08RNP26THRR88	19 60 53 4	
	12	55.88	CCVA 2,5/12-GR-5,08RNP26THRR88	19 60 54 7	
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material			CR-MSTB	17 34 40 1	100
(2) HT coding element¹⁾ , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic			CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)		
Technical data			see description		
Dimensions			5.08		
Pitch		[mm]	1.5		
Hole diameter		[mm]	1x1		
Pin dimensions		[mm]x[mm]			
Technical data in accordance with IEC/ DIN VDE					
Insulating material group		–	IIIa		
Surge voltage category / contamination class		–/–	III / 3	III / 2	II / 2
Rated voltage		[V]	250	320	400
Rated surge voltage		[kV]	4	4	4
Nominal current / cross section		[A]/[mm ²]	12 / –		
Maximum load current / cross section		[A]/[mm ²]	12 / –		
Insulating material			LCP		
Inflammability class in acc. with UL 94			V0		

Dimensional drawings, see page 6.

Dimensional drawings of tapes, see page 16.

¹⁾ Pre-coded taped articles are available on request.

CCV 2,5/...-GFL(R)-5,08P26THRR... 5.08 mm Pitch



Note:

COMBICON plug connectors may only be actuated in the no-load condition. If smaller loads need to be switched for operational reasons, experimental values are available on request.

Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.	
Taped header with threaded flange on one side , plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCV 2,5/6-GFL-5,08P26THRR56	19 59 73 6	140	
	7	30.48	CCV 2,5/7-GFL-5,08P26THRR56	19 59 74 9		
	8	35.56	CCV 2,5/8-GFL-5,08P26THRR88	19 59 75 2		
	9	40.64	CCV 2,5/9-GFL-5,08P26THRR88	19 59 76 5		
	10	45.72	CCV 2,5/10-GFL-5,08P26THRR88	19 59 77 8		
	11	50.80	CCV 2,5/11-GFL-5,08P26THRR88	19 59 78 1		
	12	55.88	CCV 2,5/12-GFL-5,08P26THRR88	19 59 79 4		
Taped header with threaded flange on one side , plug-in direction vertical to the PCB, pin length 2.6 mm, 5.08 mm pitch, color: black	6	25.40	CCV 2,5/6-GFR-5,08P26THRR56	19 59 87 5	140	
	7	30.48	CCV 2,5/7-GFR-5,08P26THRR56	19 59 88 8		
	8	35.56	CCV 2,5/8-GFR-5,08P26THRR88	19 59 89 1		
	9	40.64	CCV 2,5/9-GFR-5,08P26THRR88	19 59 90 1		
	10	45.72	CCV 2,5/10-GFR-5,08P26THRR88	19 59 91 4		
	11	50.80	CCV 2,5/11-GFR-5,08P26THRR88	19 59 92 7		
	12	55.88	CCV 2,5/12-GFR-5,08P26THRR88	19 59 93 0		
(1) Coding element , inserted into the recess on the header after the reflow assembly process, red insulation material				CR-MSTB	17 34 40 1	100
(2) HT coding element¹⁾ , inserted into the recess on the header before the reflow process, made of high temperature resistant beige plastic				CR-MSTB NAT HT	19 54 36 2	100
(3) Marker card , with 12 pcs. 10-section marker strips, white, self-adhesive, for 120 terminal blocks			SK 5,08/3,8 (see COMBICON catalog)			
Technical data			see description			
Dimensions			5.08			
Pitch		[mm]	1.5			
Hole diameter		[mm]	1x1			
Pin dimensions		[mm]x[mm]				
Technical data in accordance with IEC/ DIN VDE						
Insulating material group		–	IIIa			
Surge voltage category / contamination class		–/–	III / 3	III / 2	II / 2	
Rated voltage		[V]	250	320	400	
Rated surge voltage		[kV]	4	4	4	
Nominal current / cross section		[A]/[mm²]	12 / –			
Maximum load current / cross section		[A]/[mm²]	12 / –			
Insulating material			LCP			
Inflammability class in acc. with UL 94			V0			

Dimensional drawings, see page 7.


Dimensional drawings of tapes, see page 16.

¹⁾ Precoded taped articles are available on request.


TWO IN ONE COMBICON

Headers, taped, pitch 5.08 mm, vertical designs

Feeder direction, tape width 56 mm (R56), even and odd nos. of positions

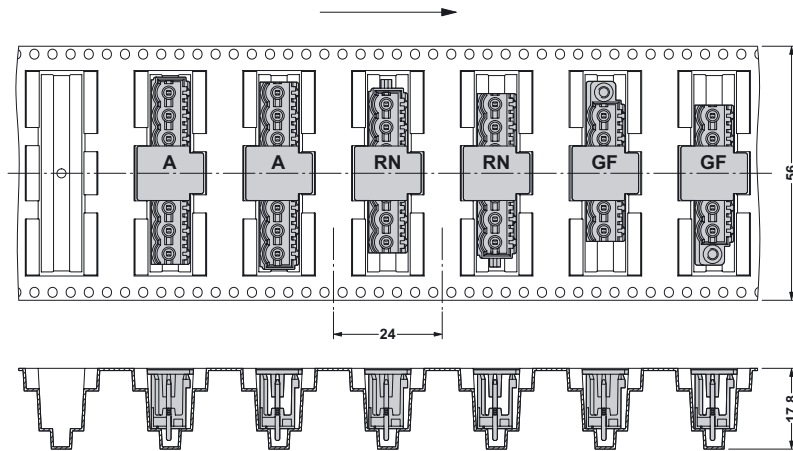

Feeder direction, tape width 88 mm (R88), even and odd nos. of positions

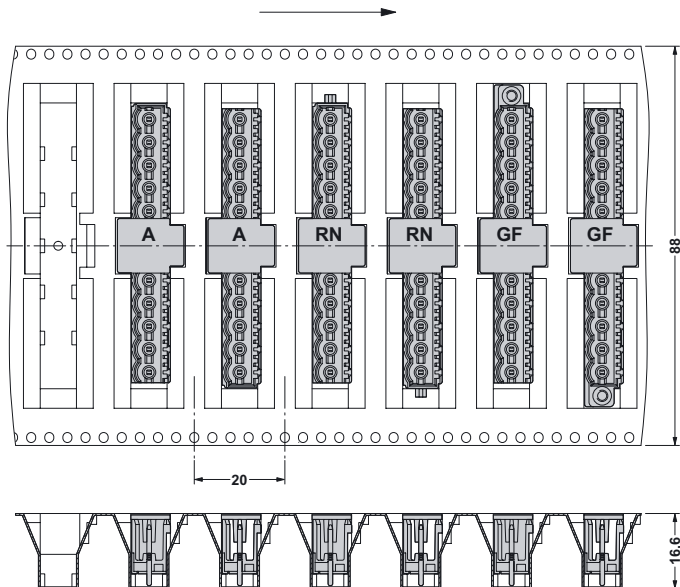

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru