

# L Series Miniature Slide Switches

## Features/Benefits

- Positive detent
- Enclosed housing
- Maintained and momentary functions
- PC and panel mounting
- RoHS compliant

## Typical Applications

- Communications equipment
- Lighting devices



**UL** **US**  
Models Available

## Specifications

**CONTACT RATING:** Q contact material (LX0X, LX1X Models): 4 AMPS @ 125 V AC or 28 V DC; 2 AMPS @ 250 V AC; 0.5 AMP @ 125 V DC (UL). See page I-23 for additional ratings.

**ELECTRICAL LIFE:** 10,000 make-and-break cycles at full load.

**CONTACT RESISTANCE:** Below 10 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

**INSULATION RESISTANCE:** 10<sup>9</sup> Ω min.

**DIELECTRIC STRENGTH:** 1,000 Vrms min. @ sea level.

**OPERATING TEMPERATURE:** -30°C to +65°C

**STORAGE TEMPERATURE:** -30°C to +85°C

**NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

## Materials

**HOUSING:** 6/6 nylon (UL94V-2), black.

**ACTUATOR:** 6/6 nylon (UL94V-2), black. '13' actuator, natural (standard).

**CONTACTS:** Q contact material: Copper, silver plated. See page I-23 for additional contact materials.

**TERMINALS:** Q contact material: Copper, silver plated. See page I-23 for additional contact materials.

**CONTACT SPRING:** Music wire or stainless steel.

**TERMINAL SEAL:** Epoxy.

**NOTE:** Any models supplied with Q, B or G contact material are RoHS compliant.



Slide

## Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages I-20 through I-24. For additional options not shown in catalog, consult Customer Service Center.

|                                     |  |   |                                 |                           |  |  |  |  |  |
|-------------------------------------|--|---|---------------------------------|---------------------------|--|--|--|--|--|
|                                     |  |   |                                 |                           |  |  |  |  |  |
| <b>Switch Function</b>              |  | <b>Actuator</b>                             |                                 |                           |  |  |  |  |  |
| <b>L202</b> DPDT                    |  | <b>01</b> .200" high                        |                                 |                           |  |  |  |  |  |
| <b>L203</b> DP3T                    |  | <b>02</b> .335" high                        |                                 |                           |  |  |  |  |  |
| <b>L101</b> SPST                    |  | <b>03</b> .375" high                        |                                 |                           |  |  |  |  |  |
| <b>L102</b> SPDT                    |  | <b>05</b> .312" high                        |                                 |                           |  |  |  |  |  |
| <b>L103</b> SP3T                    |  | <b>11</b> .100" high                        |                                 |                           |  |  |  |  |  |
| <b>L104</b> SP4T                    |  | <b>12</b> Screwdriver slot                  |                                 |                           |  |  |  |  |  |
| <b>L112</b> SPDT, mom.              |  | <b>13</b> Plunger without cap               |                                 |                           |  |  |  |  |  |
| <b>L113</b> SP3T, mom. to one end   |  | <b>14</b> Plunger with .200" dia. cap       |                                 |                           |  |  |  |  |  |
| <b>L123</b> SP3T, mom. to both ends |  | <b>15</b> Plunger with .310" dia. cap       |                                 |                           |  |  |  |  |  |
| <b>L201</b> DPST                    |  | <b>17</b> Plunger with .458" dia. cap       |                                 |                           |  |  |  |  |  |
| <b>L204</b> DP4T                    |  | <b>19</b> Plunger with .590" dia. cap       |                                 |                           |  |  |  |  |  |
| <b>L212</b> DPDT, mom.              |  |   |                                 |                           |  |  |  |  |  |
|                                     |  | <b>Detent</b>                               |                                 |                           |  |  |  |  |  |
|                                     |  | <b>1</b> With detent                        |                                 |                           |  |  |  |  |  |
|                                     |  | <b>2</b> Without detent                     |                                 |                           |  |  |  |  |  |
|                                     |  | <b>Mounting Style</b>                       |                                 |                           |  |  |  |  |  |
|                                     |  | <b>MS</b> PC Thru-hole                      |                                 |                           |  |  |  |  |  |
|                                     |  | <b>MA</b> Right angle, PC thru-hole         |                                 |                           |  |  |  |  |  |
|                                     |  | <b>ML</b> Right angle, PC thru-hole         |                                 |                           |  |  |  |  |  |
|                                     |  | <b>MV</b> Right angle, PC thru-hole         |                                 |                           |  |  |  |  |  |
|                                     |  | <b>SS</b> Panel with mounting ears          |                                 |                           |  |  |  |  |  |
|                                     |  | <b>TS</b> Panel with integral mounting ears |                                 |                           |  |  |  |  |  |
|                                     |  |   | <b>Terminations</b>             |                           |  |  |  |  |  |
|                                     |  |   | <b>02</b> PC Thru-hole          |                           |  |  |  |  |  |
|                                     |  |   | <b>01</b> Solder lug with notch |                           |  |  |  |  |  |
|                                     |  |   | <b>03</b> Solder lug with hole  |                           |  |  |  |  |  |
|                                     |  |   | <b>04</b> PC Thru-hole          |                           |  |  |  |  |  |
|                                     |  |   | <b>10</b> PC Thru-hole          |                           |  |  |  |  |  |
|                                     |  |   | <b>06</b> Wire wrap             |                           |  |  |  |  |  |
|                                     |  |   | <b>12</b> PC Thru-hole          |                           |  |  |  |  |  |
|                                     |  |   |                                 | <b>Contact Material</b>   |  |  |  |  |  |
|                                     |  |   |                                 | <b>B</b> Gold             |  |  |  |  |  |
|                                     |  |   |                                 | <b>Q</b> Silver           |  |  |  |  |  |
|                                     |  |   |                                 | <b>G</b> Gold over silver |  |  |  |  |  |
|                                     |  |   |                                 | <b>Seal</b>               |  |  |  |  |  |
|                                     |  |   |                                 | <b>NONE</b> No seal       |  |  |  |  |  |
|                                     |  |   |                                 | <b>E</b> Epoxy seal       |  |  |  |  |  |
|                                     |  |   |                                 | <b>Cap Color</b>          |  |  |  |  |  |
|                                     |  |   |                                 | <b>2</b> Black            |  |  |  |  |  |
|                                     |  |   |                                 | <b>NONE</b> No cap        |  |  |  |  |  |



# L Series Miniature Slide Switches

## SWITCH AND LOCK FUNCTION



| NO. POLES | MODEL NO.   | SWITCH FUNCTION        | SCHEMATIC | AVAILABLE MOUNTING STYLES |
|-----------|-------------|------------------------|-----------|---------------------------|
| SP        | <b>L101</b> | SPST                   |           | ML, MS, SS                |
|           | <b>L102</b> | SPDT                   |           | ML, MS, SS                |
|           | <b>L112</b> | SPDT-MOM.              |           | ML, MS, MV, SS            |
|           | <b>L103</b> | SP3T                   |           | MA, MS, TS                |
|           | <b>L113</b> | SP3T-MOM. to one end   |           | MA, MS, TS                |
|           | <b>L123</b> | SP3T-MOM. to both ends |           | MA, MS, TS                |
|           | <b>L104</b> | SP4T                   |           | MS                        |

| NO. POLES | MODEL NO.   | SWITCH FUNCTION | SCHEMATIC | AVAILABLE MOUNTING STYLES |
|-----------|-------------|-----------------|-----------|---------------------------|
| DP        | <b>L201</b> | DPST            |           | MA, MS, SS                |
|           | <b>L202</b> | DPDT            |           | MA, MS, SS                |
|           | <b>L212</b> | DPDT-MOM.       |           | MV                        |
|           | <b>L203</b> | DP3T            |           | MS, TS                    |
|           | <b>L204</b> | DP4T            |           | MS                        |

NOTE: and MOM. in table indicates momentary action.

All models with all options when ordered with 'G' or 'Q' contact material.

Contacts make on side actuator thrown.


## ACTUATOR

CAP COLOR




### ACTUATOR OPTIONS FOR 'MS, MA, ML, SS, & TS' MOUNTING STYLES


**01** .200" HIGH




**02** .335" HIGH



**03** .375" HIGH




**05** .312" HIGH



**11** .100" HIGH




**12** SCREWDRIVER SLOT




NOTE: No actuator color option code is required. Standard actuator color is black, other colors and heights available, consult Customer Service Center. See pages I-20 and I-22 for available mounting styles.

### ACTUATOR OPTIONS FOR 'MV' MOUNTING STYLE

**13** PLUNGER WITHOUT CAP




**14** PLUNGER WITH CAP




Cap part number 7089

**15** PLUNGER WITH CAP




Cap part number 8018

**17** PLUNGER WITH CAP



Cap part number 7982

**19** PLUNGER WITH CAP



Cap part number 8940

| OPTION CODE | ACTUATOR CAP COLORS |
|-------------|---------------------|
| <b>2</b>    | BLACK               |
| <b>NONE</b> | 01-13 ACTUATORS     |

Other colors available, consult Customer Service Center.

### ACTUATOR CAPS

Caps supplied are not installed standard. To order actuator options '14 thru 19,' select desired cap color from chart and place option code in last box of ordering format. Leave box empty for all other actuator options. Caps may also be ordered separately and user installed, see pages I-23 and I-24. Specify the four digit part number and desired cap color. For switches without caps, order '13' or '23' actuator option. Cap finish: gloss (excluding square cap part number 7982, finish: matte).



Third Angle Projection

Dimensions are shown: Inch (mm)

Specifications and dimensions subject to change

Slide

# L Series Miniature Slide Switches

## DETENT

### 1 WITH DETENT

Standard with all maintained models: L101, L102, L103, L104, L113, L201, L202, L203 and L204.

### 2 WITHOUT DETENT

Standard with all momentary models: L112, L123, and L212.

## MOUNTING STYLE

### MS PC THRU-HOLE, 2 POSITION MODELS



#### AVAILABLE WITH:

**Models:** L101, L102, L112, L103, L113 L123, L201, L202, L203, L104 and L204  
**Terminations:** 02, 06, 10 and 12  
**Actuators:** 01, 02, 03, 05, 11 and 12

#### PC MOUNTING

For mounting information, see TERMINATIONS section, page I-23.



L203011MS02Q

**DP3T**

### PC THRU-HOLE, 3 POSITION MODELS



### PC THRU HOLE, 4 POSITION MODELS



### MA RIGHT ANGLE, PC THRU-HOLE



#### AVAILABLE WITH:

**Models:** L103, L201, L202, L113 and L123  
**Terminations:** 04  
**Actuators:** 02 and 12

#### PC MOUNTING



For mounting information, see TERMINATIONS section, page I-23.



L202021MA04Q  
Horizontal Actuation

**DPDT**

### RIGHT ANGLE, PC, SP-3 POSITION MODELS

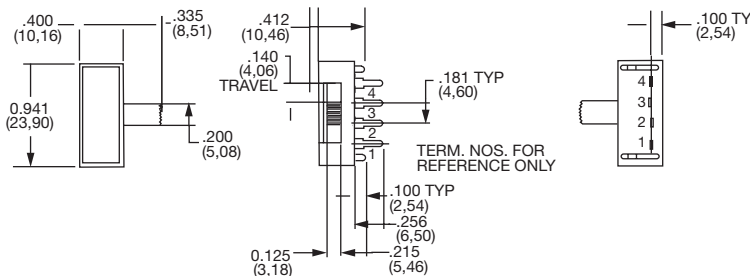


Third Angle Projection  
 Dimensions are shown: Inches (mm)  
 Specifications and dimensions subject to change

# L Series Miniature Slide Switches

## MOUNTING STYLE



### ML RIGHT ANGLE, PC THRU-HOLE



#### AVAILABLE WITH:


**Models:** L101, L102, L112  
**Terminations:** 04  
**Actuators:** 01, 02, 05, 11 and 12  
**PC MOUNTING**

For mounting information, see TERMINATIONS section, page I-23.



L10201ML04Q  
Horizontal Actuation  
SPDT

### MV RIGHT ANGLE, PC THRU-HOLE



#### AVAILABLE WITH:

**Models:** L112 and L212  
**Terminations:** 02, 06, 10 and 12  
**Actuators:** 13 thru 19

#### PC MOUNTING

For mounting information, see TERMINATIONS section, page I-23.






L212132MV02Q  
DPDT


### SS PANEL WITH MOUNTING EARS



L202011SS03Q  
DPDT

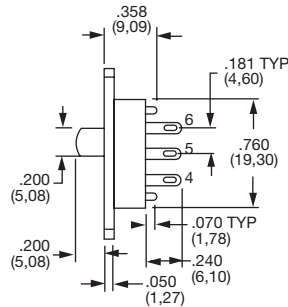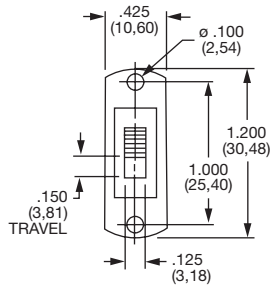

#### PANEL MOUNTING





#### AVAILABLE WITH:

**Models:** L101, L102, L112, L201 and L202  
**Terminations:** 01, 02, 03, 06, 10, 12  
**Actuators:** 01, 02, 03, 05, 11 and 12


### TS PANEL WITH INTEGRAL MOUNTING EARS



L203011TS03Q  
DP3T

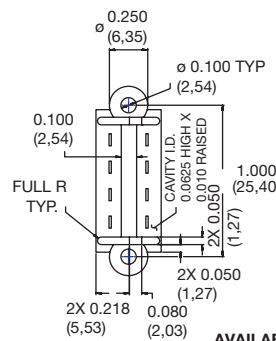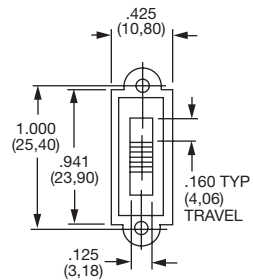

#### PANEL MOUNTING



#### AVAILABLE WITH:

**Models:** L103, L113, L123 and L203  
**Terminations:** 01, 02, 03, 06, 10, 12  
**Actuators:** 01, 02, 03, 05, 11 and 12



Third Angle  
Projection

Dimensions are shown: Inch (mm)


Specifications and dimensions subject to change

# L Series Miniature Slide Switches

## TERMINATIONS

'MS, MV, SS & TS' Mounting Styles Only

**02** PC THRU-HOLE



**01** SOLDER LUG WITH NOTCH




**03** SOLDER LUG WITH HOLE



**10** PC THRU-HOLE



**12** PC THRU-HOLE



**06** WIRE WRAP




'MA & ML' Mounting Styles Only

**04** PC THRU-HOLE




All models with '04' terminations and 'ML' mounting style.




All 2 position models, except '04' and '10' terminations.




All 2 position models with '04' and '10' terminations.



All 3 position models except '04' and '10' terminations.



All 3 position models, with '10' termination.



All 4 position models, except '04' and '10' terminations.



All 4 position models, with '10' terminations.

## CONTACT MATERIAL

| OPTION CODE | CONTACT MATERIAL              | RATINGS                        |  |
|-------------|-------------------------------|--------------------------------|--|
| <b>B</b>    | GOLD <sup>1</sup>             | LOW LEVEL/DRY CIRCUIT          | 0.4 VA MAX. @20 V AC OR DC max.  |
| <b>Q</b>    | SILVER <sup>2</sup>           | POWER                          | LX0X, LX1X MODELS: 4 AMPS @ 125 V AC or 28 V DC; 2 AMPS @ 250 V AC; 0.5 AMP @ 125 V DC (UL).<br>LX6X MODELS: 4 AMPS @ 125 V AC or 28 V DC; 2 AMPS @ 250 V AC (UL).   |
| <b>G</b>    | GOLD OVER SILVER <sup>3</sup> | LOW LEVEL/DRY CIRCUIT OR POWER | LX0X, LX1X MODELS: 0.4 VA MAX. @ 20 V AC or DC MAX. or 4 AMPS @ 125 V AC or 28 V DC; 2 AMPS @ 250 V AC; 0.5 AMP @ 125 V DC (UL).<br>LX6X MODELS: 0.4 VA MAX. @ 20 V AC or DC MAX. or 4 AMPS @ 125 V AC or 28 V DC; 2 AMPS @ 250 V AC (UL). |

\* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

<sup>1</sup> CONTACTS & TERMINALS: Copper, with gold plate over nickel plate.

<sup>2</sup> CONTACTS & TERMINALS: Copper, silver plated (standard with all termination options).

<sup>3</sup> CONTACTS & TERMINALS: Copper, with gold plate over nickel plate over silver plate.

**NOTE:** Any models supplied with B, Q or G contact material are RoHS compliant.

All models  with all options when ordered with 'G' or 'Q' contact material.

NOTE: 'G' contact material is equivalent to both 'B' and 'Q' contact materials.

## SEAL

**NONE** NO SEAL

**E** EPOXY SEAL



Third Angle  
Projection

Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

**C&K**

19 Mar 2019



Slide

# L Series Miniature Slide Switches

## AVAILABLE HARDWARE

Cap  
Compatible with 13-19 actuators



**PART NO.**  
**708902000** BLACK  
**708903000** RED

Material: Nylon  
Finish: Gloss

Cap  
Compatible with 13-19 actuators



**PART NO.**  
**752702000** BLACK  
**752703000** RED

Material: Nylon  
Finish: Gloss

Cap  
Compatible with 13-19 actuators



**PART NO.**  
**801802000** BLACK  
**801803000** RED

Material: Nylon  
Finish: Gloss

Cap  
Compatible with 13-19 actuators



**PART NO.**  
**452D02000** BLACK  
**452D03000** RED

Material: Nylon  
Finish: Gloss

Cap  
Compatible with 13-19 actuators



**PART NO.**  
**894102000** BLACK  
**894103000** RED

Material: Nylon  
Finish: Gloss

Cap  
Compatible with 13-19 actuators



**PART NO.**  
**484602000** BLACK  
**484603000** RED

**PART NO.**  
**798202263** BLACK  
**798203000** RED

Material: Nylon  
Finish: Gloss

Material: Nylon  
Finish: Matte

Cap  
Compatible with 01-05 actuators



**PART NO.**  
**120100602** BLACK

Material: Nylon  
Finish: Matte

**NOTE:** Other colors available,  
consult Customer Service Center.



Dimensions are shown: Inch (mm)  
Specifications and dimensions subject to change

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)