

A
B
C
D
E
F

10115091 - X 0 E - X X X L F

8-COLUMN
DIFFERENTIAL
SIGNAL

LEAD-FREE DESIGNATION
ONLY WITH APPLICABLE
PLATING CODES

LETTER	PLATING (SEE NOTE 6)	
	APPLICATION	TYPE (REFERENCE)
B	TELCORDIA CO	0.76um GOLD or GXT
C	TELCORDIA UE	1.27um GOLD
D	TELCORDIA CO	0.76um GOLD or GXT, LEAD-FREE
E	TELCORDIA UE	1.27um GOLD, LEAD-FREE

NUMBER	GUIDE PIN STYLE (SEE NOTE 8)
0	STANDARD GUIDE PIN, MACHINED
1	STANDARD GUIDE PIN, ROLLED


MODULE DESCRIPTION	LETTER DESIGNATION REPRESENTED IN DASH NUMBER										BASE MODULE
LEFT POLARIZING GUIDANCE MODULE (SEE SHEET 6)	N	J	A	B	C	D	E	F	G	H	
	NO KEY NO GUIDE PIN										
RIGHT POLARIZING GUIDANCE MODULE (SEE SHEET 7)	Z	Y	P	Q	R	S	T	U	V	W	
	NO KEY NO GUIDE PIN										
OPEN MODULE (TWO WALL) (SEE SHEET 2)	0 (ZERO)										
LEFT WALL MODULE (SEE SHEET 3)	L										
RIGHT WALL MODULE (SEE SHEET 4)	M										
FOUR WALL MODULE (SEE SHEET 5)	1 (ONE)										


NUMBER	CONTACT MATING WIPE LENGTH		COMPLIANT TAIL TYPE (SEE NOTE 9)
	SIGNAL	GROUND	
1	2 MM	4 MM	0.55 (0.0217") DRILL
2	3 MM	4 MM	0.55 (0.0217") DRILL
3	2 MM	4 MM	0.45 MICRO (0.0177") DRILL
4	3 MM	4 MM	0.45 MICRO (0.0177") DRILL
5	2 MM	3 MM	0.55 (0.0217") DRILL
6	3 MM	3 MM	0.55 (0.0217") DRILL
7	2 MM	3 MM	0.45 MICRO (0.0177") DRILL
8	3 MM	3 MM	0.45 MICRO (0.0177") DRILL
FOR CUSTOM-LOADED MODULES, SEE INDIVIDUAL CUSTOM DRAWINGS WITH THE DRAWING-NUMBER FORMAT OF 10115091-XXXX, WHERE: "X" DENOTES MODULE TYPE PER CHART ON THIS SHEET "YYYY" IS A SEQUENTIAL NUMBER BEGINNING WITH "0001".			

TABLE 1 (SEE NOTE 11)		
	UNGROUNDED	GROUNDED
FHS	Ø2.35-Ø2.55	Ø2.35-Ø2.55
PAD	N/A	Ø5.50
PLATED	NO	YES
DRILL(mm)	2.44mm	2.58mm
DRILL(in)	0.096"	0.1015"

TABLE 2 (SEE NOTE 12)		
SCREW P/N	DESCRIPTION	BOARD THICKNESS
10091790-002LF	#2-56 X 0.375" LG. PHILIPS PANHEAD W/SQ CONICAL WASHER	1.60-5.00mm
10091790-003LF	#2-56 X 0.375" LG. PHILIPS PANHEAD W/SQ CONICAL WASHER	5.00-10.00mm

spec ref		-	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED	
ISO 406 ISO 1101			
surface 	linear	0.X	±0.3
		0.XX	±0.10
		0.XXX	±0.05
ISO 1302	angular	0°	±2°


dr	Collins Lu	2011/07/27			size	A2	scale	1:1		
eng	Sandar Soe	2016/03/07			ecn no	ELX-S-17624-1				
chr	-	-								
appr	Chen-Hong Tan	2016/03/17	product family		-	rel level			Released	
Amphenol FCI		title			MODULE ASSEMBLY, XCEDE HD		dwg no		10115091	rev
		Veritcal Header, 4 Pair 8 Column								E
www.fci.com		cat. no.		-	Product - Customer Drw				sheet 1 of 8	

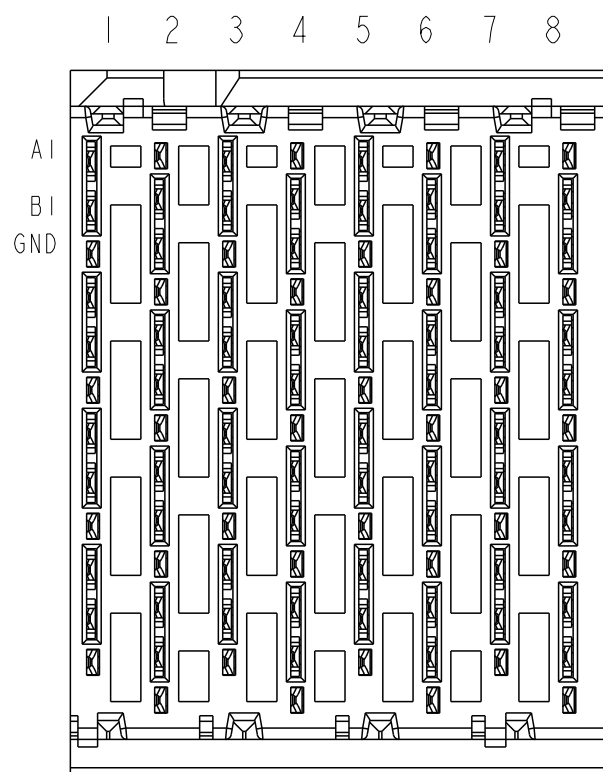




SEE NOTE 5


PIN A1

OPEN WALL MODULE

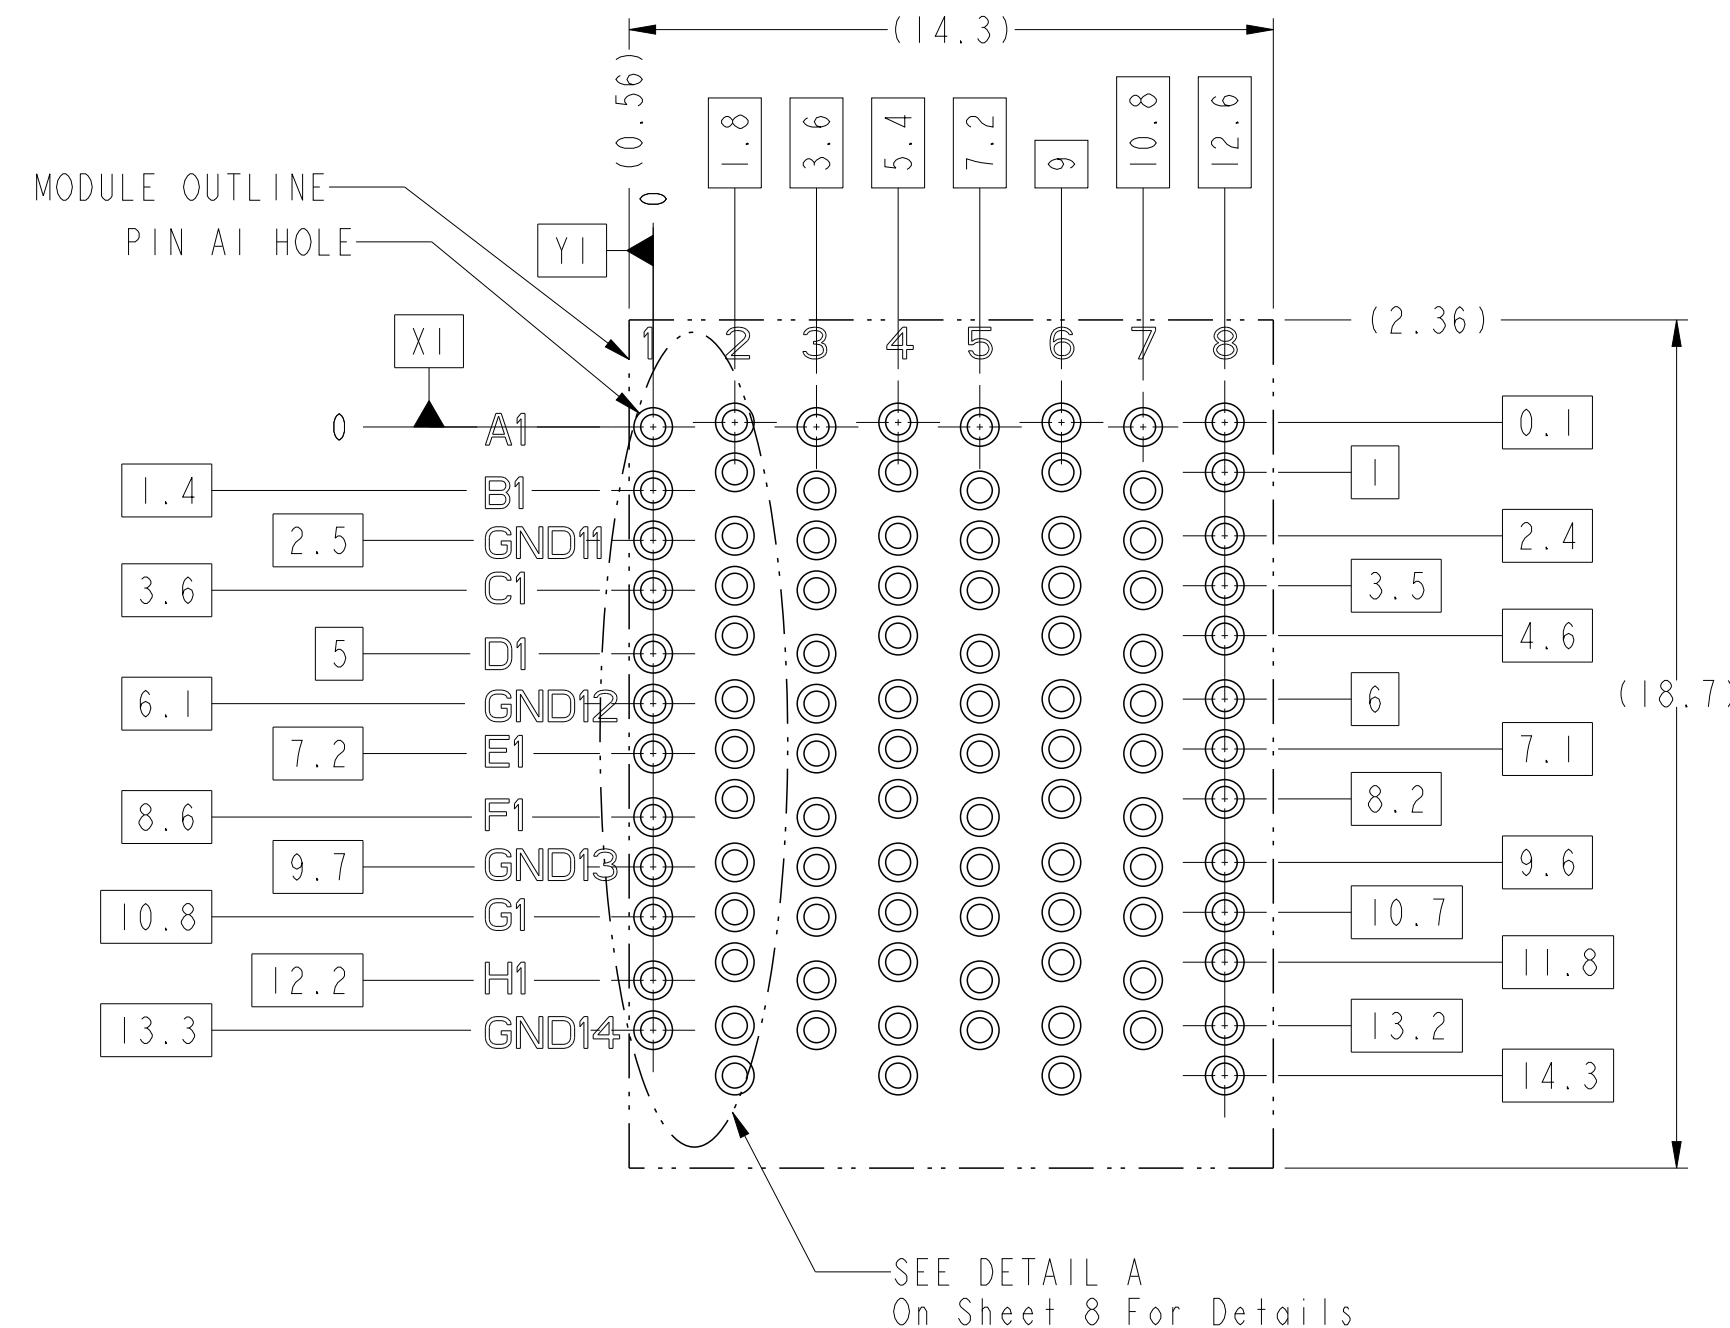

BP HOLE PATTERN COMPONENT SIDE
OPEN WALL MODULE BACKPLANE FOOTPRINT

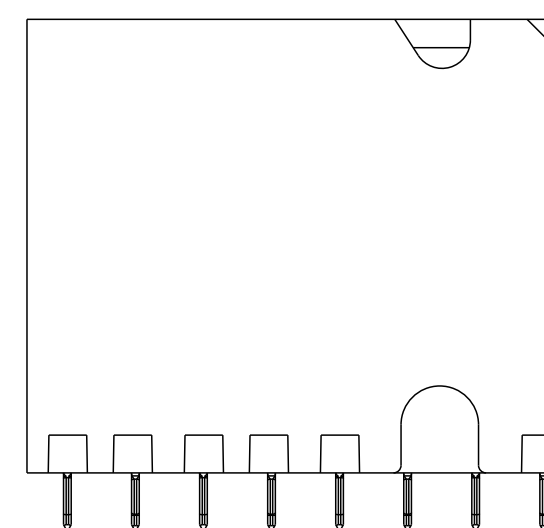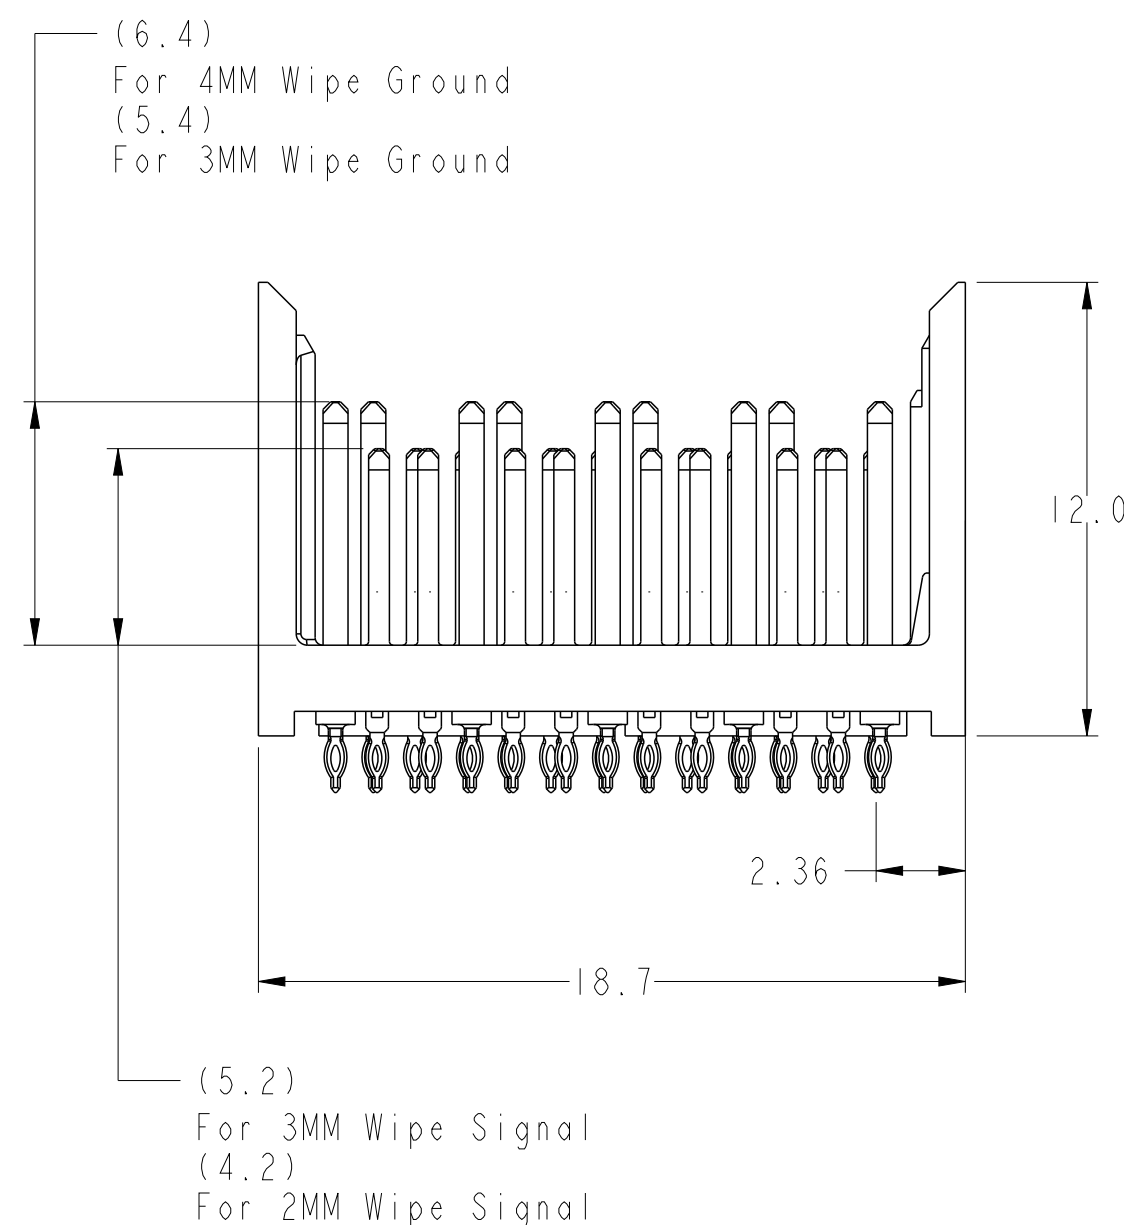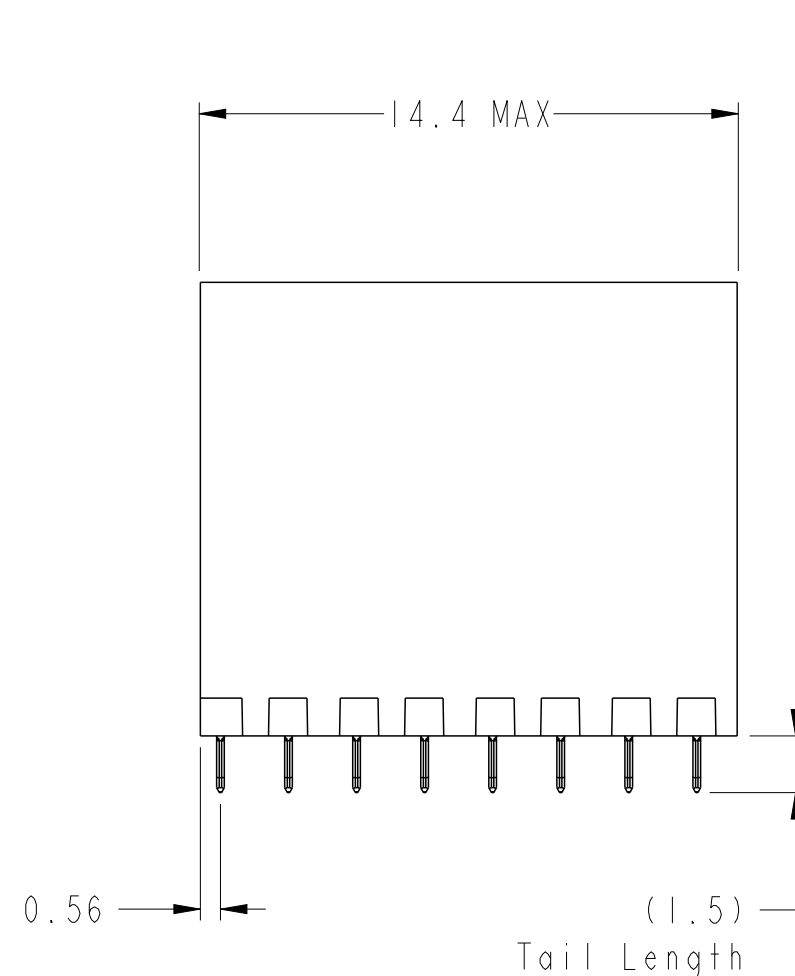


spec ref		-		dr		Collins Lu		2011/07/27		projection		mm		size		A2		scale		1:1	
tolerance std		ISO 406		eng		Sandar Soe		2016/03/07						ecn no		ELX-S-17624-1		rel level		Released	
ISO 1101		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-													
surface		ISO 1302		appr		Chen-Hong Tan		2016/03/17		product family		-		rel level		Released					
		linear		0.X		±0.3		Amphenol FCI		title		MODULE ASSEMBLY, XCEDE HD		dwg no		10115091		rev		E	
		0.XX		±0.10																	
		0.XXX		±0.05																	
angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 2 of 8							






PDS: Rev :E

STATUS:Released

Printed: Mar 17, 2016



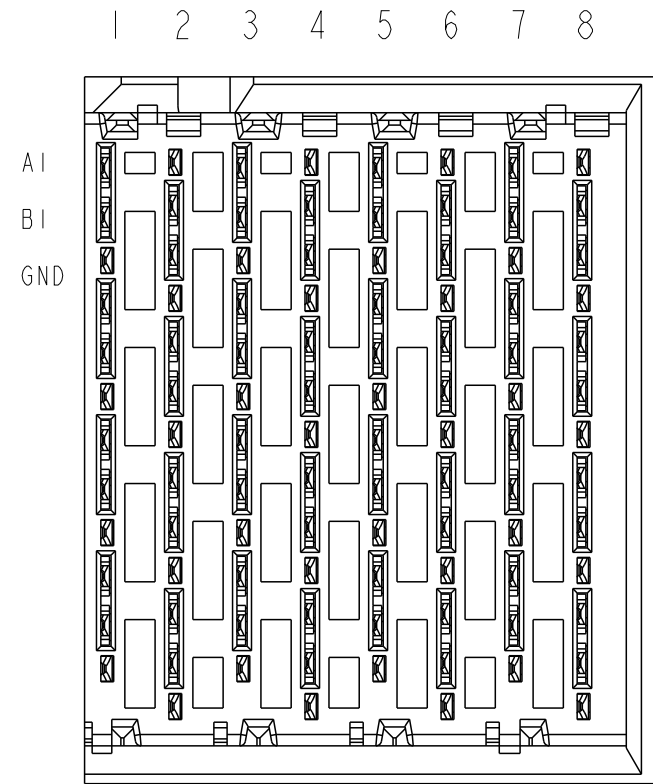


RIGHT WALL MODULE

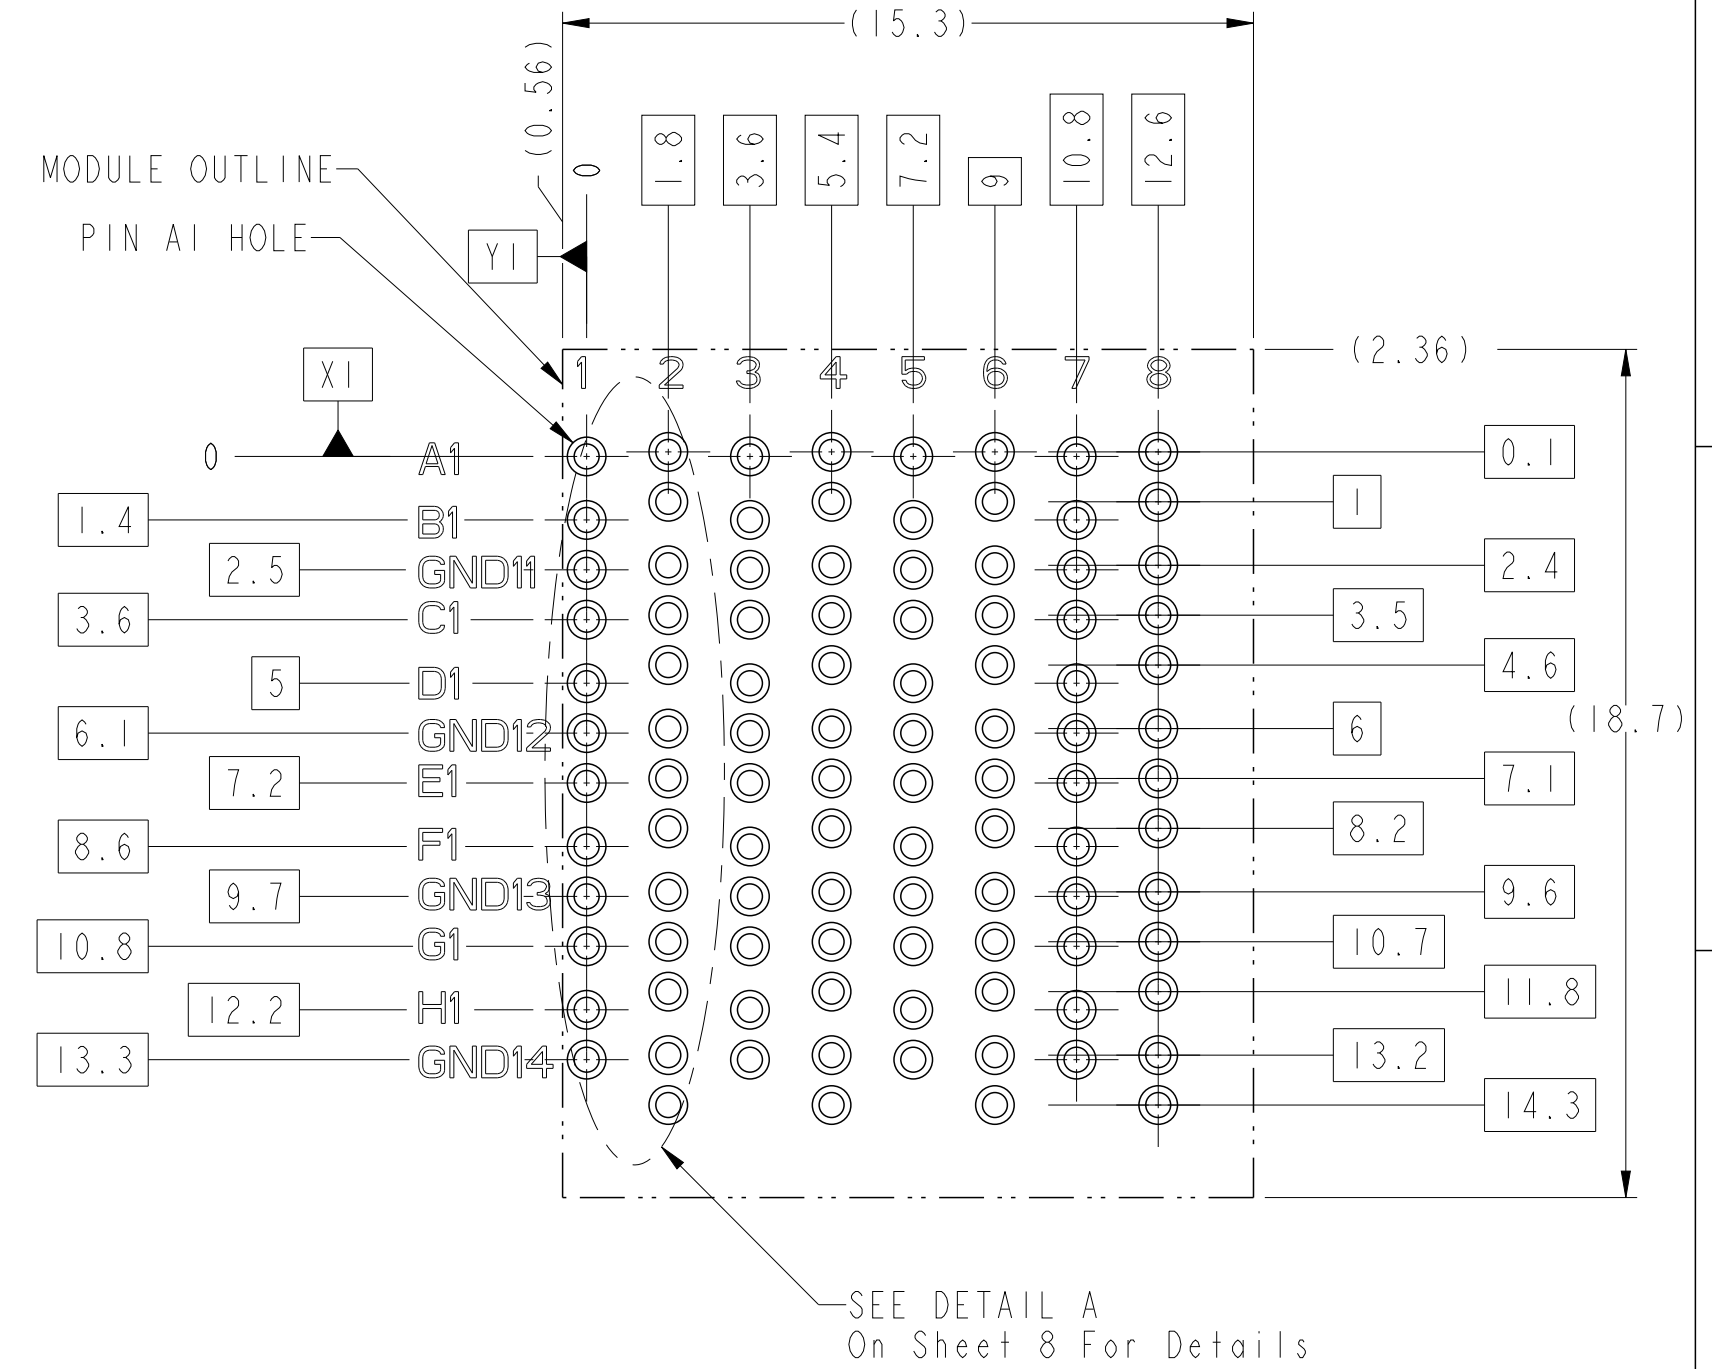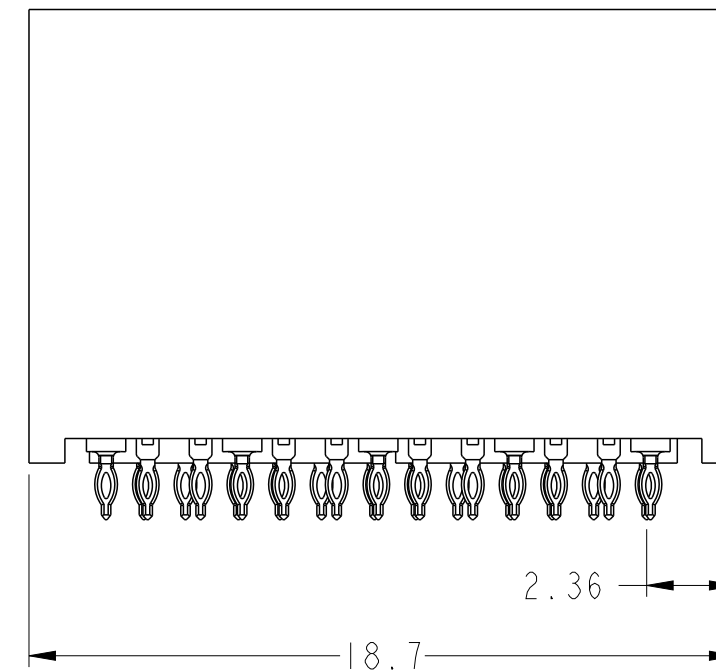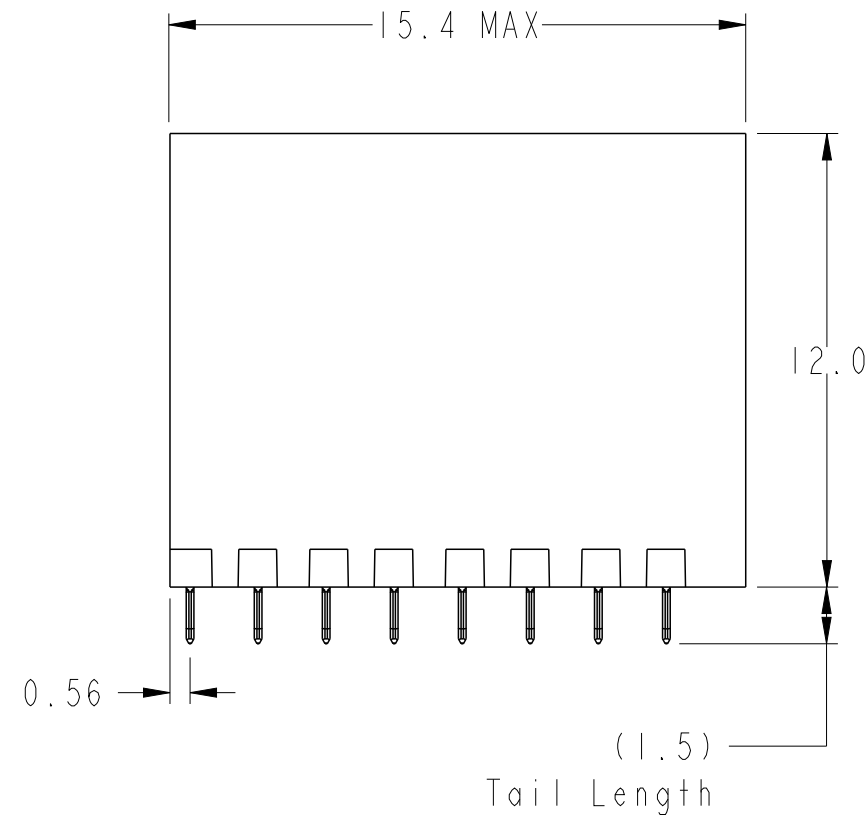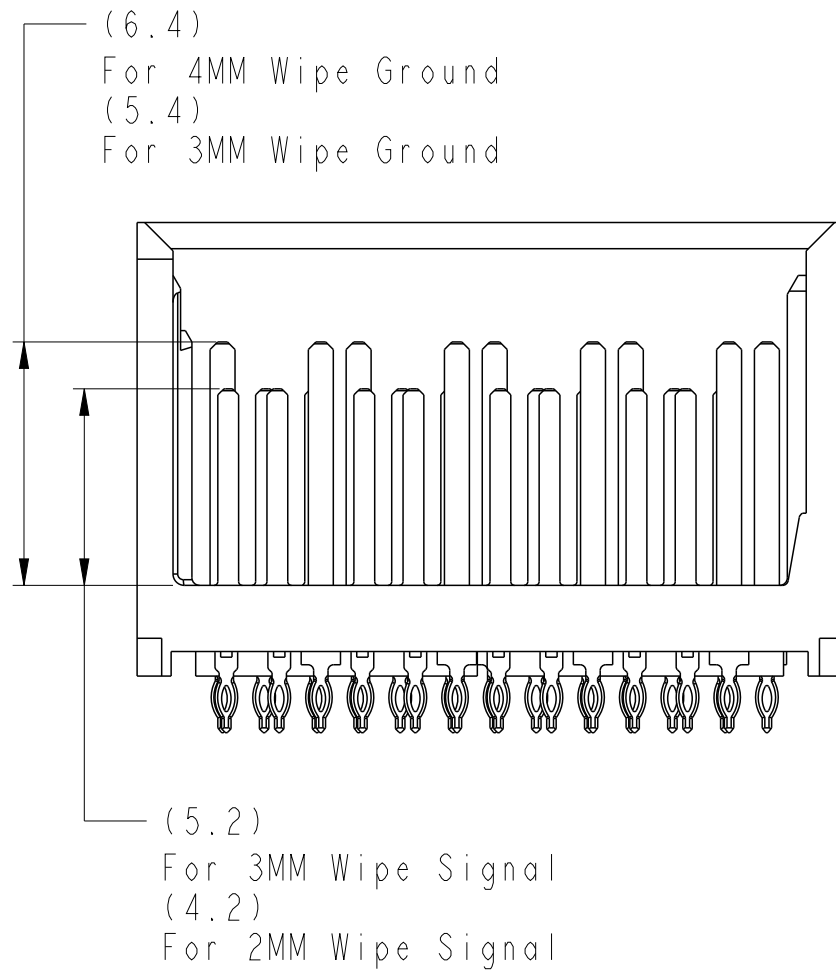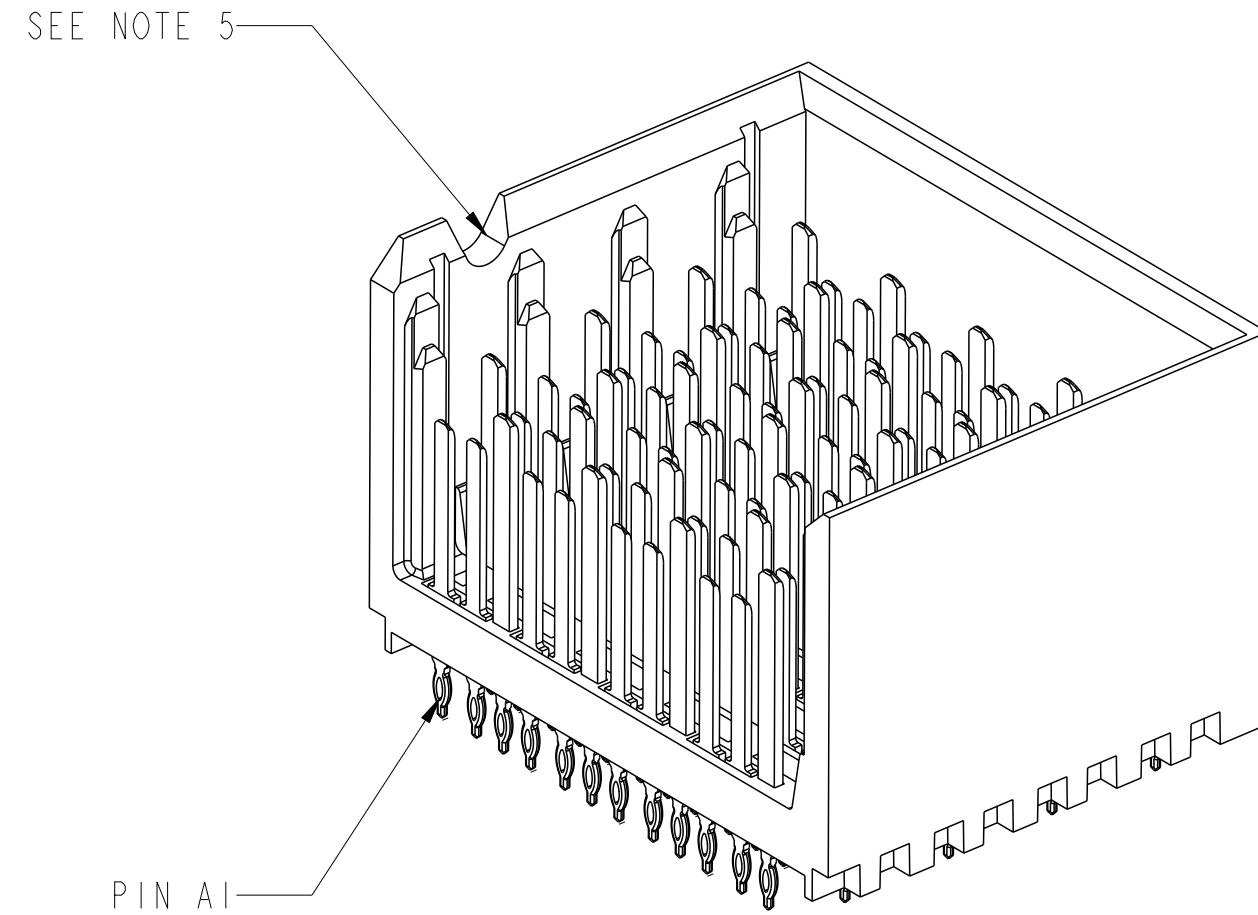




RIGHT WALL MODULE BACKPLANE FOOTPRINT

spec ref	-	dr	Collins Lu	2011/07/27	projection	mm	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/07	chr	-	ecn no	ELX-S-17624-1		
		appr	Chen-Hong Tan	2016/03/17	product family	-	rel level	Released		
surface	ISO 1302	linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.05	angular	0° ±2°	Amphenol FCi www.fci.com		title MODULE ASSEMBLY, XCEDE HD Veritcal Header, 4 Pair 8 Column		dwg no 10115091
cat. no.							Product - Customer Drw		sheet 4 of 8	
PDS: Rev :E							STATUS:Released		Printed: Mar 17, 2016	

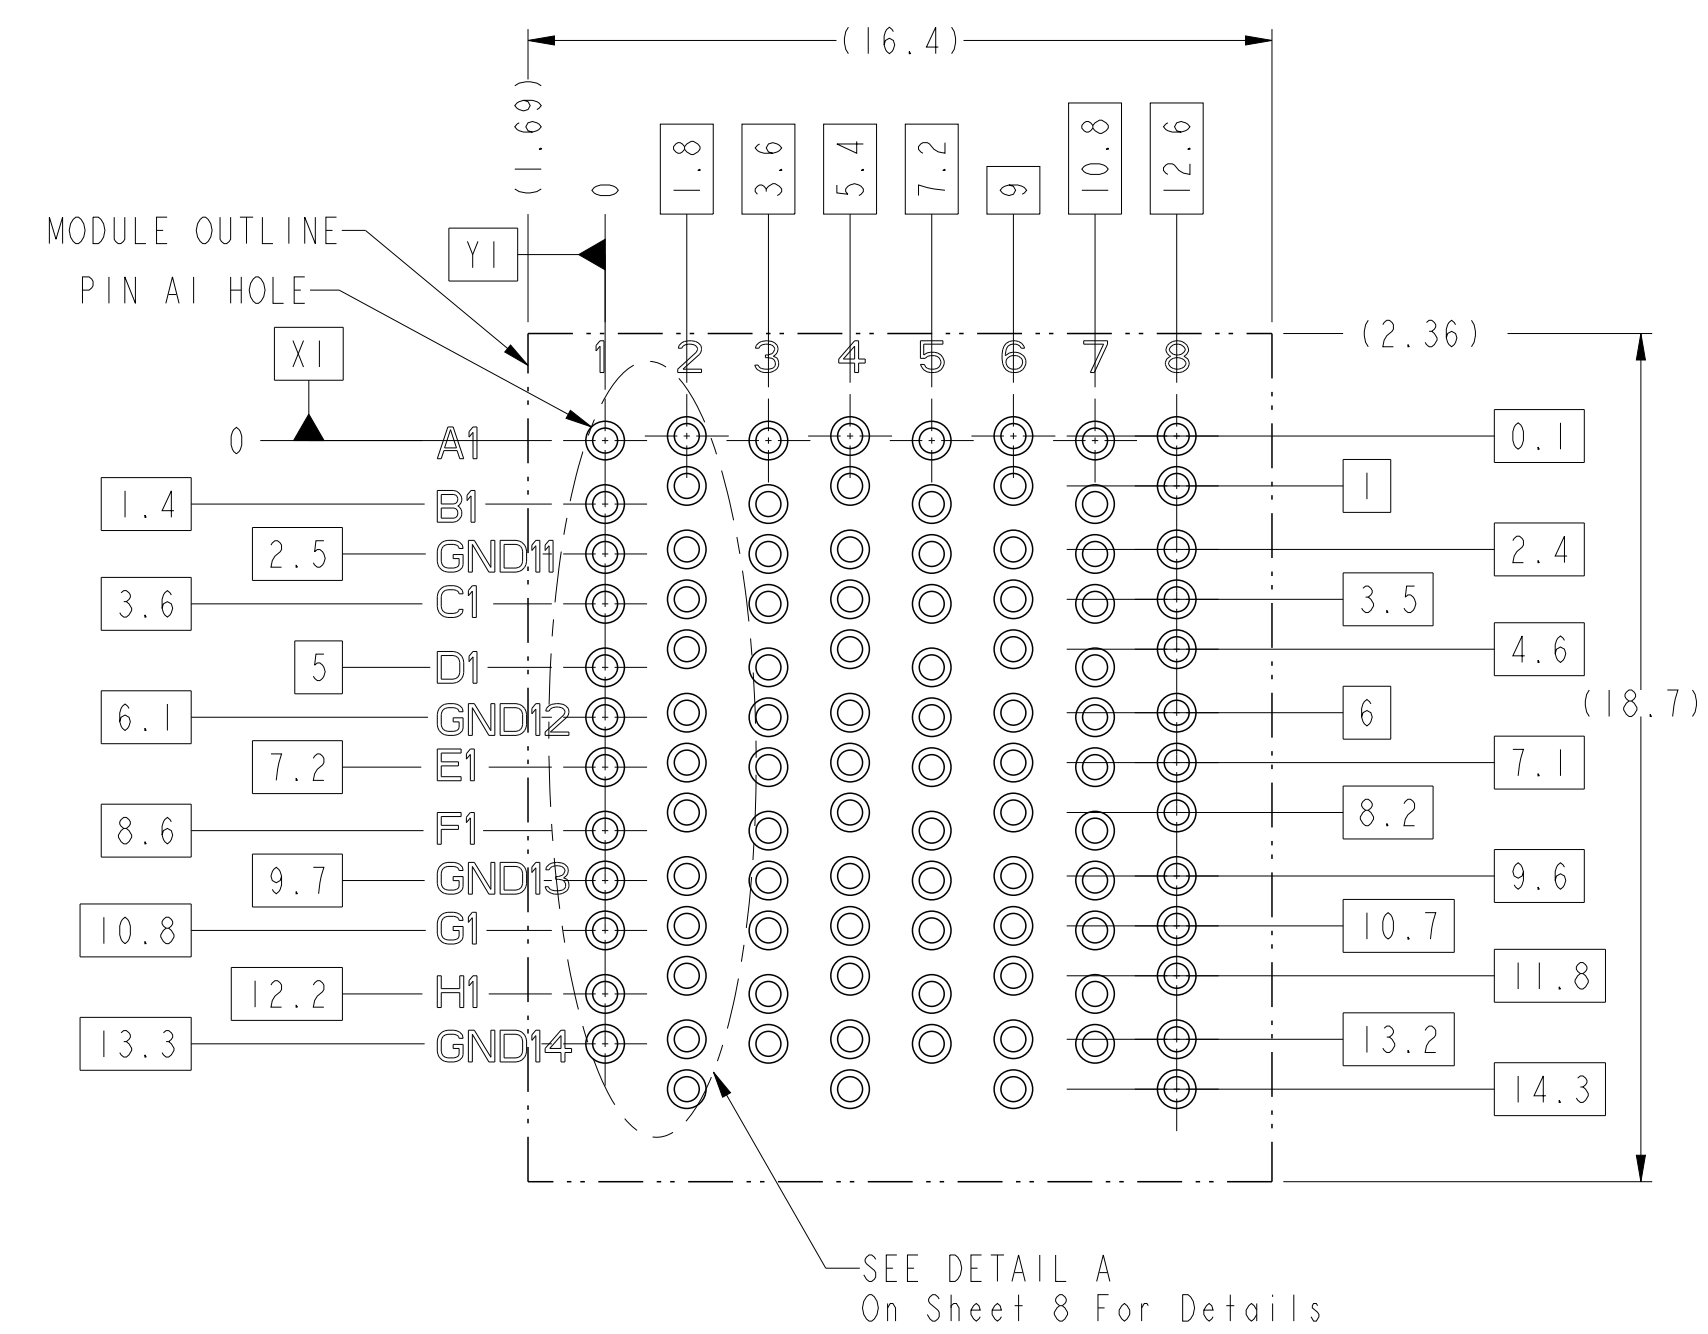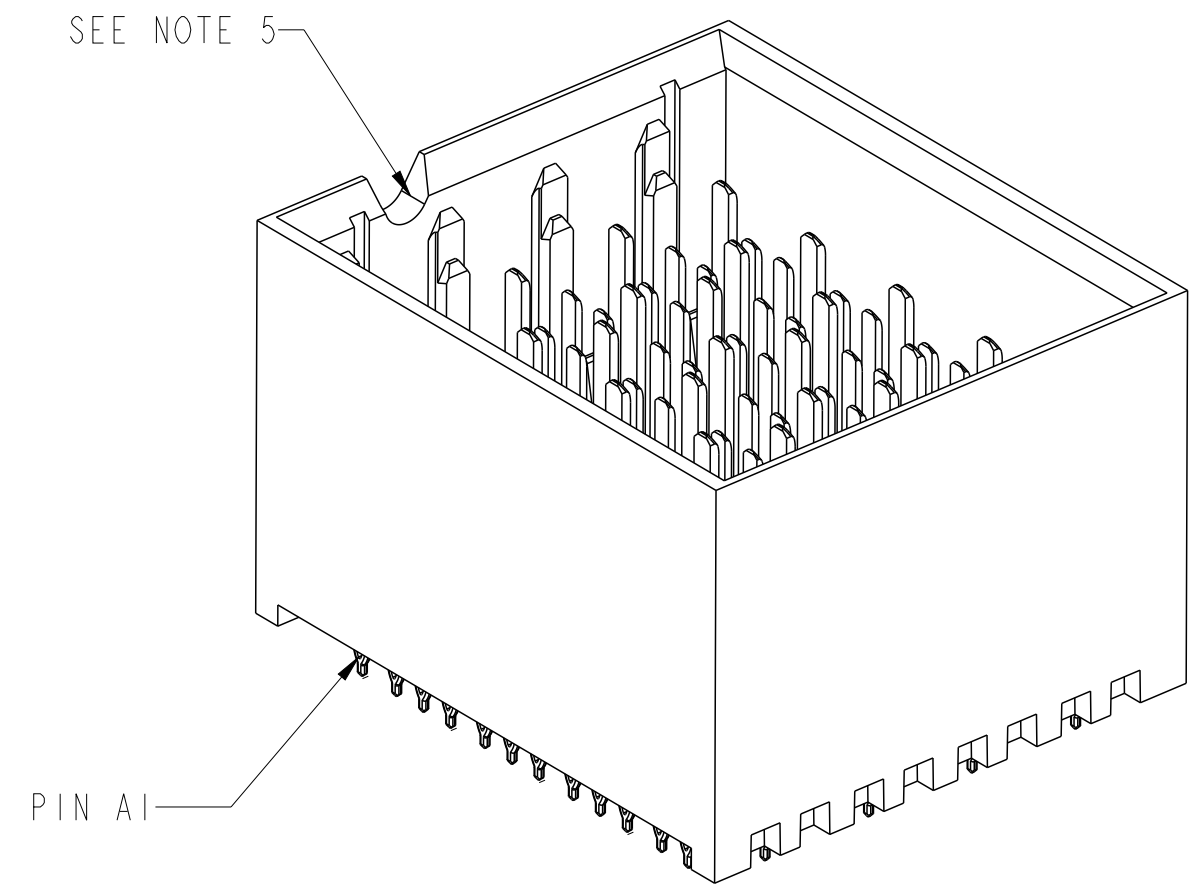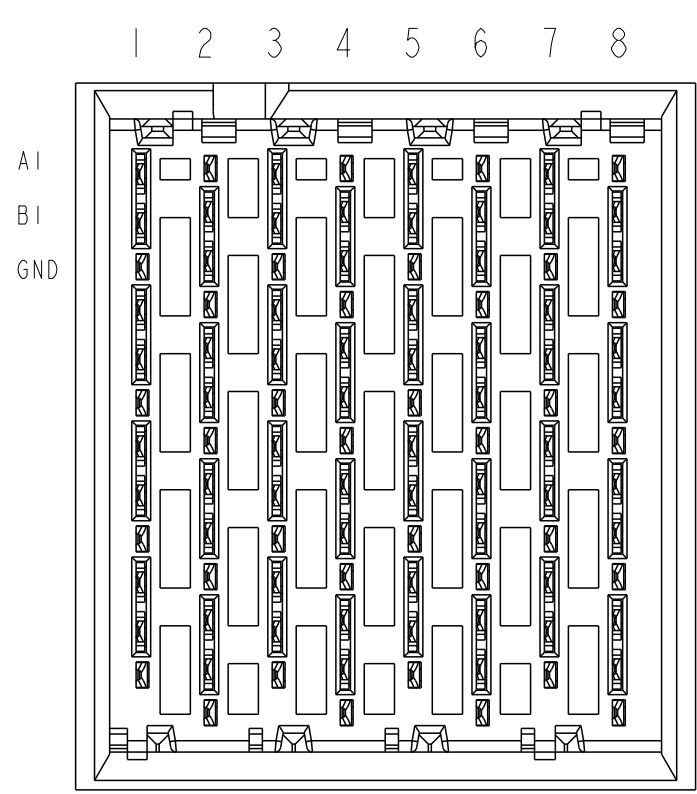

FOUR WALL MODULE

BP HOLE PATTERN COMPONENT SIDE

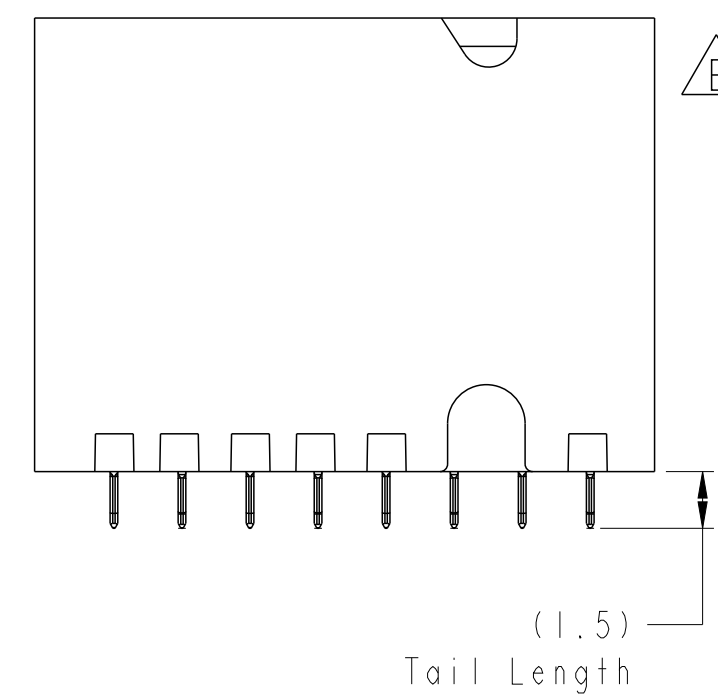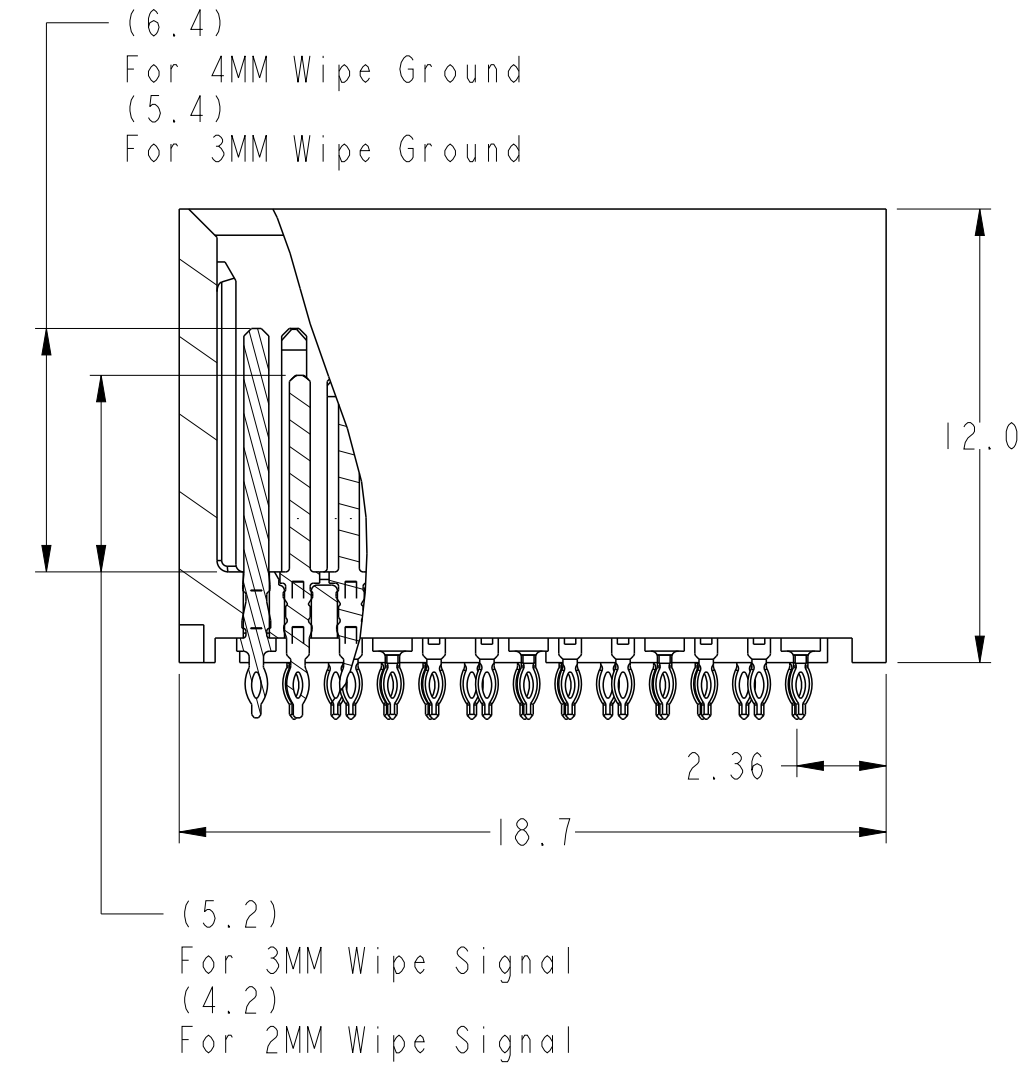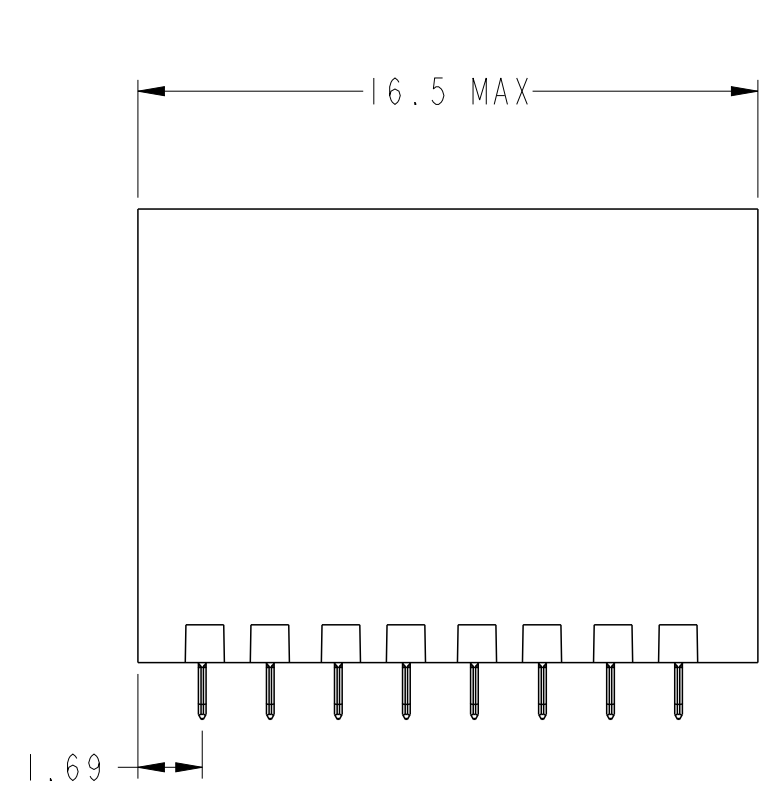

FOUR WALL MODULE BACKPLANE FOOTPRINT

spec ref	-	dr	Collins Lu	2011/07/27	projection	mm	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/07	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	-	cat. no.	-	Product - Customer Drw	sheet 5 of 8
TOLERANCES UNLESS OTHERWISE SPECIFIED		Amphenol FCI		title		MODULE ASSEMBLY, XCEDE HD		dwg no		10115091
linear		0.X		±0.3		Veritcal Header, 4 Pair 8 Column		rev		E
		0.XX		±0.10						
		0.XXX		±0.05						
angular		0°		±2°						

Amphenol FCI

© 2016 AFCI

LEFT POLARIZING/GUIDE MODULE

Optional Key See Sheet 1
Part Number Tree

SEE NOTE 5

SEE NOTE 11 & TABLE 1



PIN A1 HOLE

MODULE OUTLINE


SEE DETAIL A
OnSheet 8 For Details

BP HOLE PATTERN COMPONENT SIDE


LEFT POLARIZING GUIDE MODULE
BACKPLANE FOOTPRINT

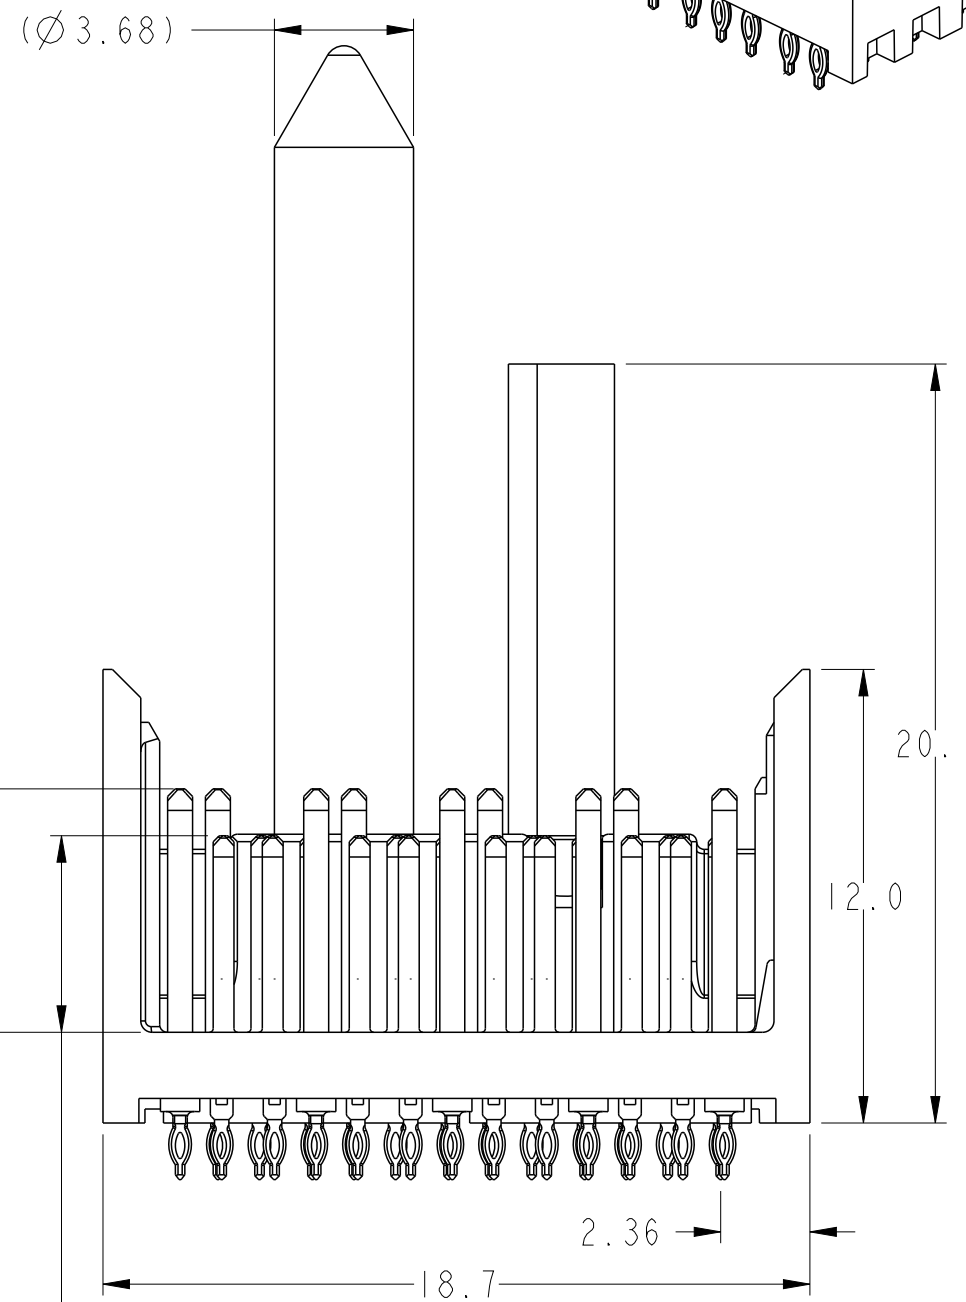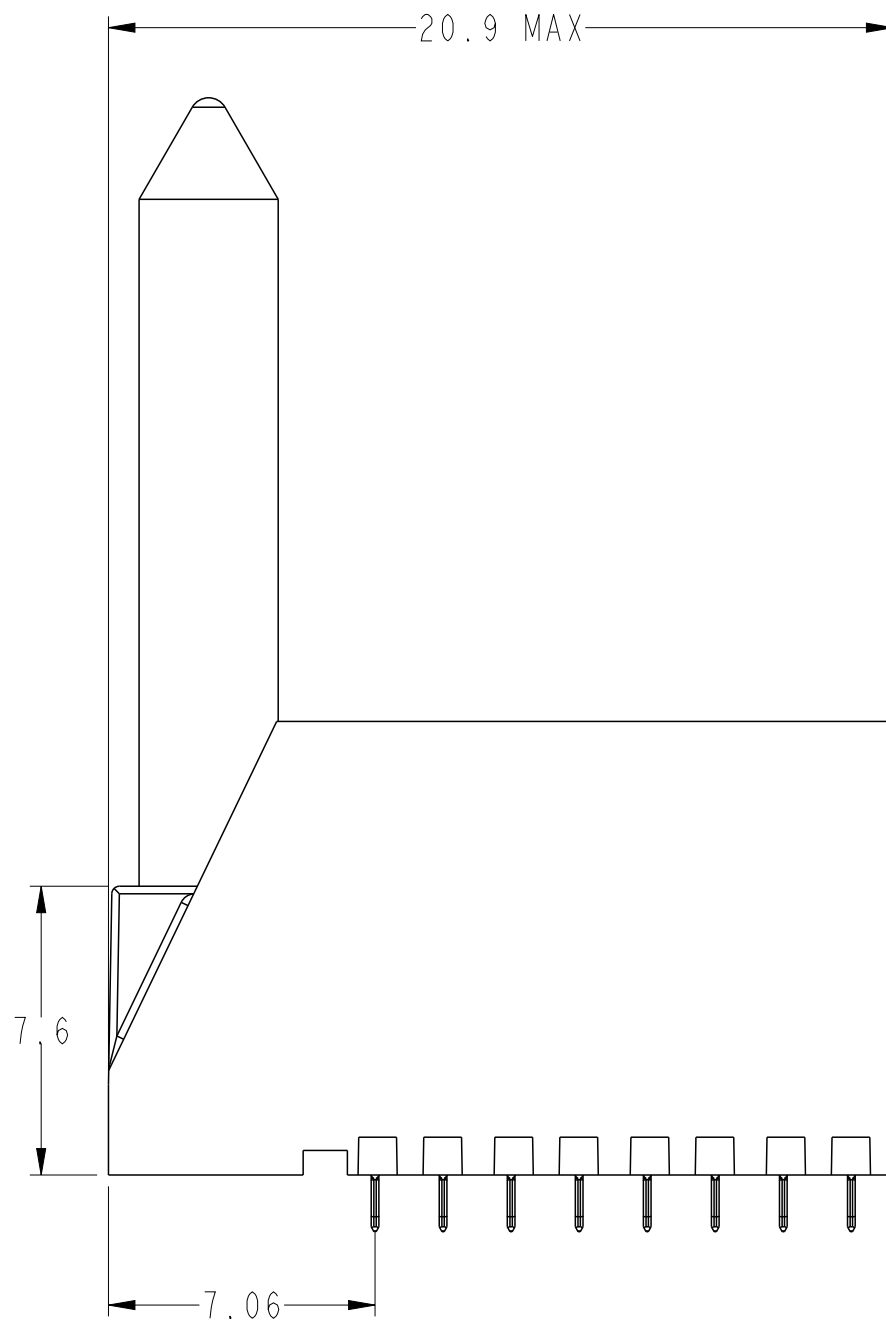

(5.2)
For 3MM Wipe Signal
(4.2)
For 2MM Wipe Signal
(6.4)
For 4MM Wipe Ground
(5.4)
For 3MM Wipe Ground

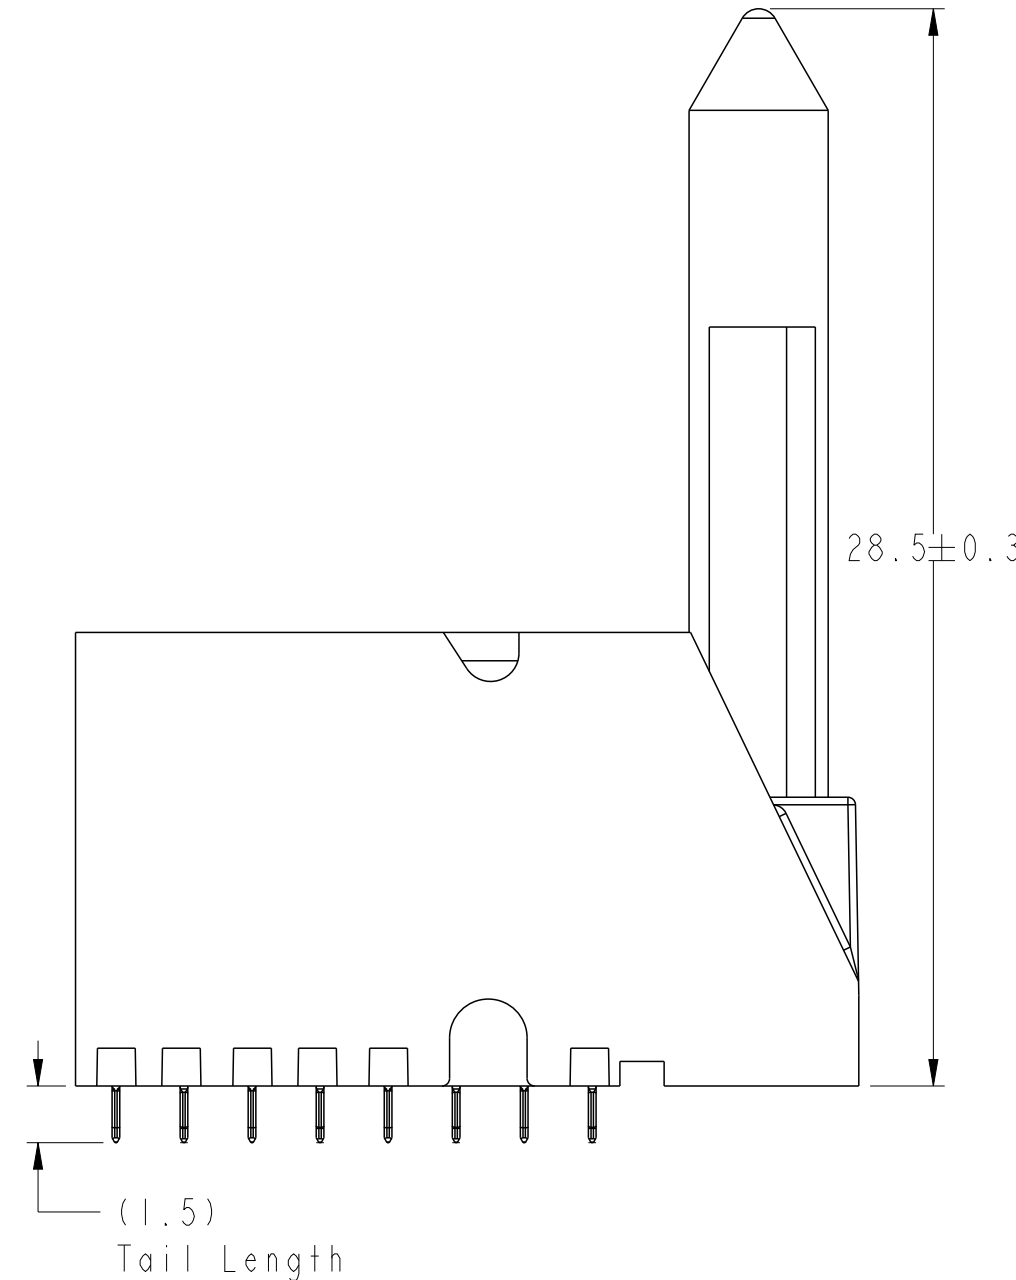

spec ref		-		dr	Collins Lu	2011/07/27	projection		mm		size	scale
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Sandar Soe	2016/03/07	ecn no	ELX-S-17624-1					1:1	
		chr	-	-	rel level	Released						
ISO 406		appr	Chen-Hong Tan	2016/03/17	product family		-					
ISO 1101												
surface		linear	0.X	±0.3	Amphenol FCi	title	MODULE ASSEMBLY, XCEDE HD	dwg no	10115091	rev	E	
			0.XX	±0.10								
			0.XXX	±0.05								
		angular	0°	±2°								
ISO 1302					www.fci.com	cat. no.	-	Product - Customer Drw		sheet 6 of 8		

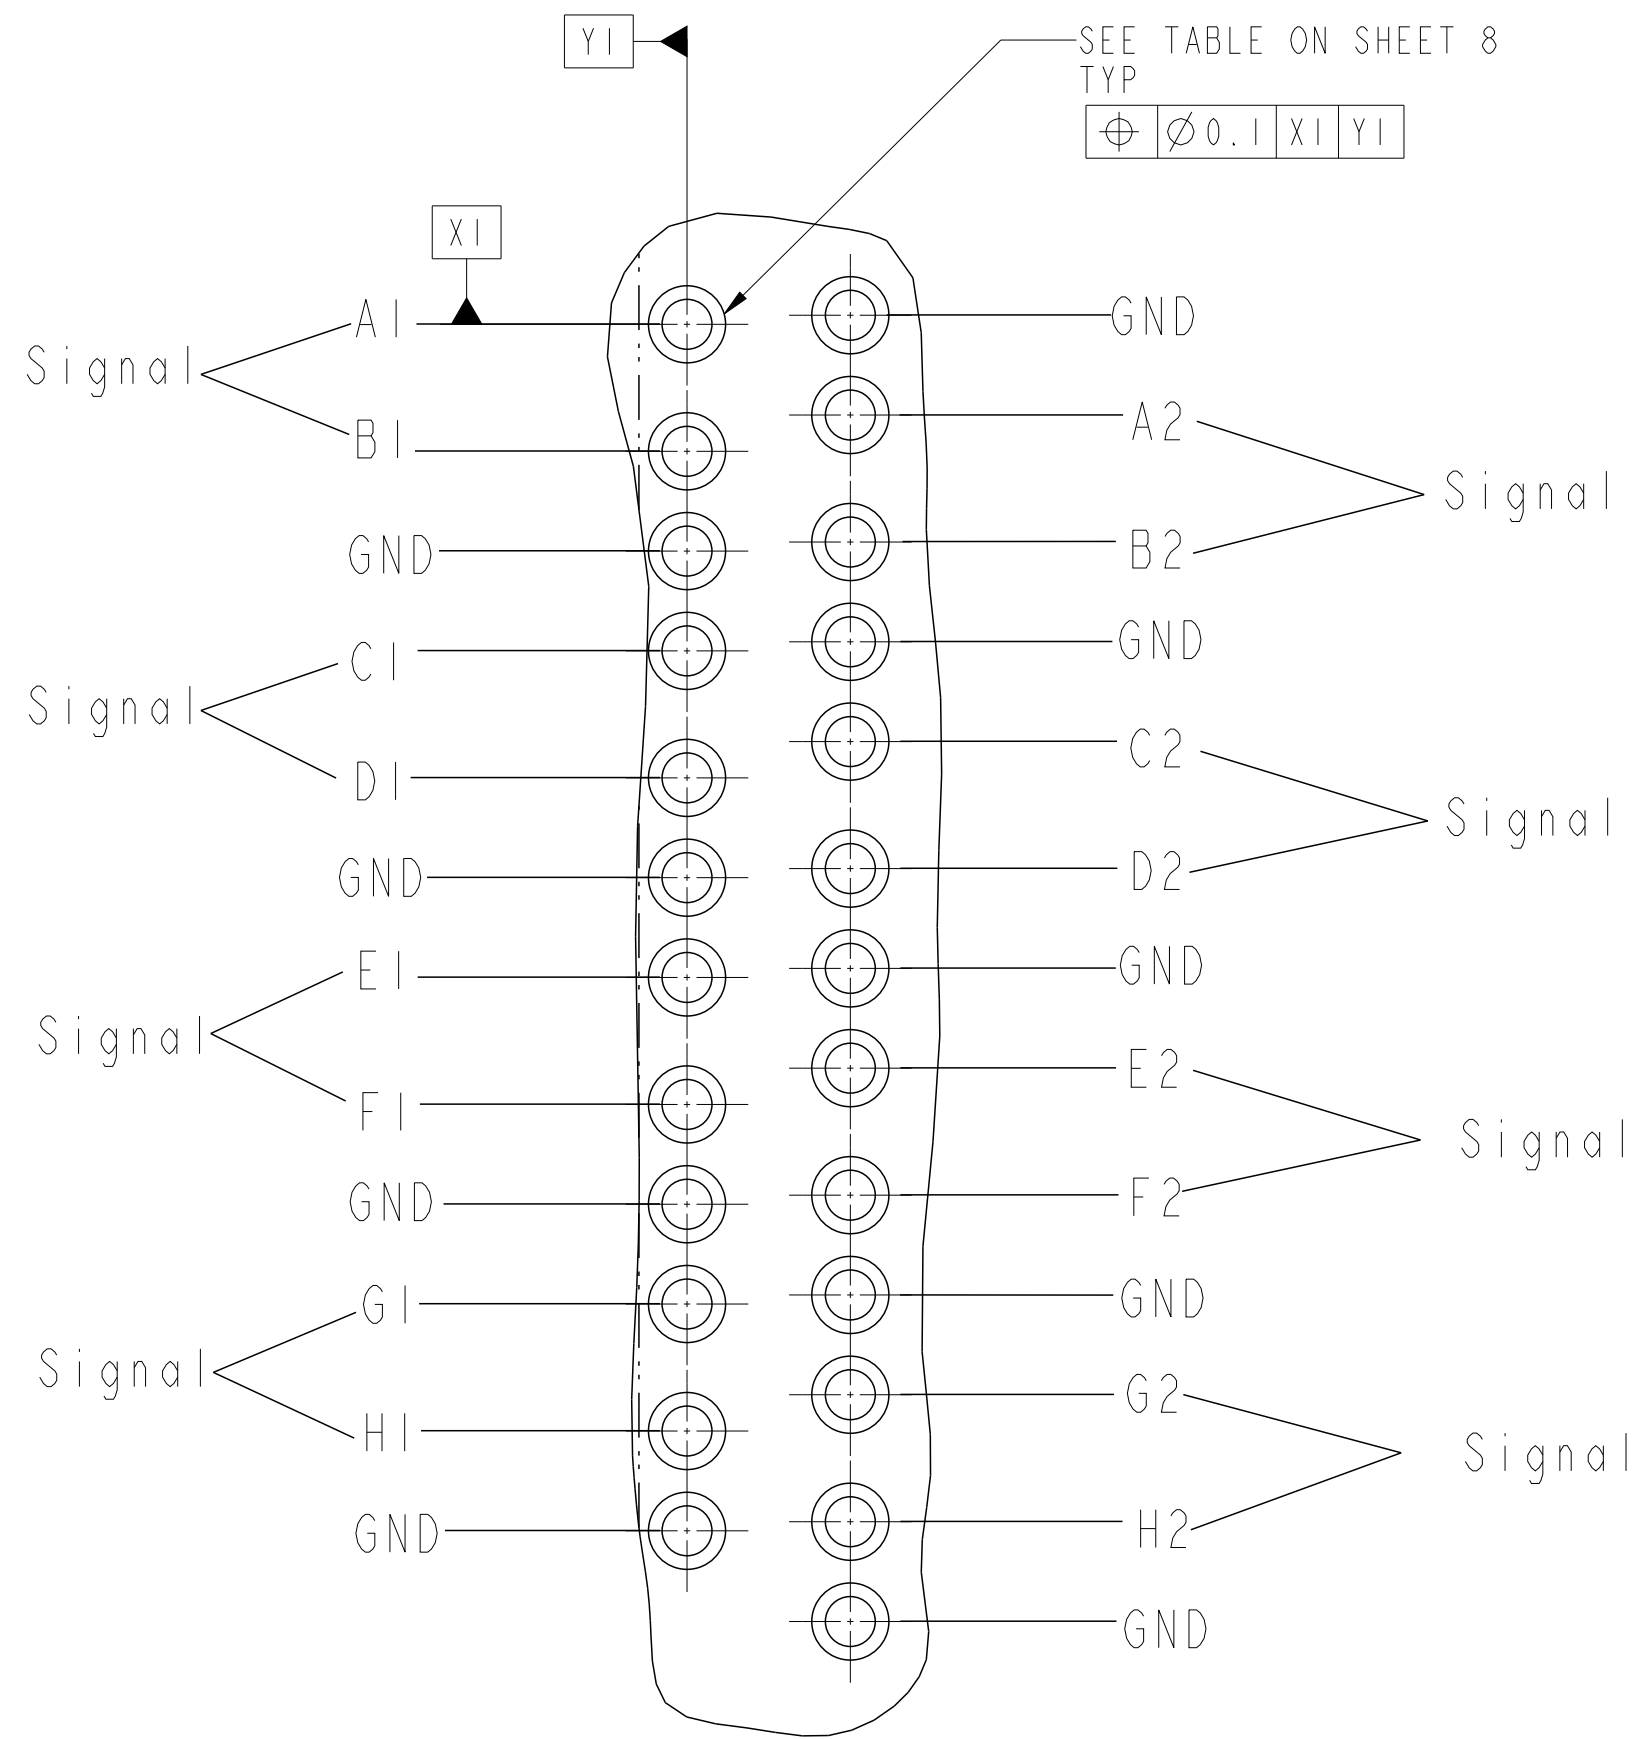

DETAIL A
SCALE 12:1

TABLE 3		
	COMPLIANT PIN DRILL $\Phi 0.55$ [0.0217"]	COMPLIANT PIN DRILL $\Phi 0.45$ [0.0177"]
PTH	$\Phi 0.45 \pm 0.05$	$\Phi 0.36 \pm 0.05$
DRILL	$\Phi 0.55$ [0.0217"]	$\Phi 0.45$ [0.0177"]
PAD	$\Phi 0.85$	$\Phi 0.75$

NOTES:

- CONNECTOR MATERIALS
SHROUD : HIGH-TEMP POLYMER, COLOR : BLACK, UL94V-0
CONTACTS : HIGH PREFORMANCE COPPER ALLOY
- PRODUCT SPECIFICATION : GS-12-0936
- APPLICATION SPECIFICATION : GS-20-0348
- PRODUCT MARKING :
PART NUMBER (10115091-XOE-XXXLF)
"FCI" AND DATE CODE (FCI P#####)
- NOTCH DESIGNATES "ROW A" SIDE OF CONNECTOR. NOTCH FEATURE ON OPPOSITE FOR PRODUCT MARKING.
- PLATING THICKNESS OF SIGNAL & GROUND CONTACT ARE DETERMINED BY PLATING CODE, REFER TO P/N TREE ON SHEET 1.
- PACKAGING MEETS GS-14-920 LEAD-FREE LABELING SPECIFICATION.
- GUIDE-PIN STYLE DESIGNATION ONLY APPLIES TO MODULE VERSIONS THAT REQUIRE GUIDE-PIN HARDWARE. FOR ALL NON-GUIDE-PIN VERSIONS, THE DEFAULT DASH-NUMBER DIGIT IN THAT LOCATION IS STILL '0'.
- SEE APPLICATION SPECIFICATION FOR ROUTING GUIDELINES, ADDITIONAL PTH GUIDELINES, MATED DIMENSIONS, GUIDE PIN SELECTION, ETC.
- A $\triangle$ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE THAT HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.
- OPTIONAL HOLE LOCATION FOR GROUNDED PIN OR ADDITIONAL GUIDE-PIN SUPPORT. SEE TABLE 1 SHEET 1 FOR ADDITIONAL DETAILS.
- SCREW IS OPTIONAL AND ENGAGES WITH BOTTOM OF GUIDE PIN FROM BENEATH THE PCB FOR ADDITIONAL GUIDE-PIN SUPPORT.

spec ref	-	dr	Collins Lu	2011/07/27	projection	mm	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/07	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	Module Assembly, XCEDE HD	cat. no.	10115091	rev	E
TOLERANCES UNLESS OTHERWISE SPECIFIED		Amphenol FCI		Veritcal Header, 4 Pair 8 Column		Product - Customer Drw		sheet 8 of 8		
linear	0.X ± 0.3 0.XX ± 0.10 0.XXX ± 0.05	angular	0° $\pm 2^\circ$	www.fci.com		PDS: Rev :E		STATUS:Released		Printed: Mar 17, 2016

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru