

| 0 | | 509 | - X O E - X X X L F

8-COLUMN
DIFFERENTIAL
SIGNAL

LEAD-FREE DESIGNATION
— ONLY WITH APPLICABLE
PLATING CODES

LETTER	PLATING (SEE NOTE 6)	
	APPLICATION	TYPE (REFERENCE)
B	TELCORDIA CO	0.76um GOLD or GXT
C	TELCORDIA UE	1.27um GOLD
D	TELCORDIA CO	0.76um GOLD or GXT, LEAD-FREE
E	TELCORDIA UE	1.27um GOLD, LEAD-FREE

NUMBER	GUIDE PIN STYLE (SEE NOTE 8)
0	STANDARD GUIDE PIN, MACHINED
1	STANDARD GUIDE PIN, ROLLED

MODULE DESCRIPTION	LETTER DESIGNATION REPRESENTED IN DASH NUMBER										BASE MODULE
LEFT POLARIZING GUIDANCE MODULE (SEE SHEET 6)	N	J	A	B	C	D	E	F	G	H	
	NO KEY NO GUIDE PIN										
RIGHT POLARIZING GUIDANCE MODULE (SEE SHEET 7)	Z	Y	P	Q	R	S	T	U	V	W	
	NO KEY NO GUIDE PIN										
OPEN MODULE (TWO WALL) (SEE SHEET 2)	0 (ZERO)										
LEFT WALL MODULE (SEE SHEET 3)	L										
RIGHT WALL MODULE (SEE SHEET 4)	M										
FOUR WALL MODULE (SEE SHEET 5)	1 (ONE)										



NUMBER	CONTACT MATING WIPE LENGTH		COMPLIANT TAIL TYPE (SEE NOTE 9)
	SIGNAL	GROUND	
1	2 MM	4 MM	0.55 (0.0217") DRILL
2	3 MM	4 MM	0.55 (0.0217") DRILL
3	2 MM	4 MM	0.45 MICRO (0.0177") DRILL
4	3 MM	4 MM	0.45 MICRO (0.0177") DRILL
5	2 MM	3 MM	0.55 (0.0217") DRILL
6	3 MM	3 MM	0.55 (0.0217") DRILL
7	2 MM	3 MM	0.45 MICRO (0.0177") DRILL
8	3 MM	3 MM	0.45 MICRO (0.0177") DRILL


FOR CUSTOM-LOADED MODULES, SEE INDIVIDUAL CUSTOM DRAWINGS
WITH THE DRAWING-NUMBER FORMAT OF 10115091-XXXX, WHERE:
"X" DENOTES MODULE TYPE PER CHART ON THIS SHEET "YYYY" IS
A SEQUENTIAL NUMBER BEGINNING WITH "0001".

TABLE 1 (SEE NOTE 11)		
	UNGROUNDED	GROUNDED
FHS	Ø 2.35-Ø 2.55	Ø 2.35-Ø 2.55
PAD	N/A	Ø 5.50
PLATED	NO	YES
DRILL (mm)	2.44mm	2.58mm
DRILL (in)	0.096"	0.1015"

TABLE 2 (SEE NOTE 12)		
SCREW P/N	DESCRIPTION	BOARD THICKNESS
10091790-002LF	#2-56 X 0.375" LG. PHILIPS PANHEAD W/SQ CONICAL WASHER	1.60-5.00mm
10091790-003LF	#2-56 X 0.375" LG. PHILIPS PANHEAD W/SQ CONICAL WASHER	5.00-10.00mm

spec ref		-	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED	
ISO 406			
ISO 1101			
surface 	ISO 1302	linear	0.X ±0.3
			0.XXX ±0.1
			0.XXX ±0.05
		angular	0° ±2°


dr	Collins Lu	2011/07/27	projection 	mm 	size	A2	scale	1:1	
eng	Sandar Soe	2016/03/07			ecn no	ELX-S-17624-1			
chr	-	-			rel level	Released			
appr	Chen-Hong Tan	2016/03/17	product family	-					
		title	MODULE ASSEMBLY, XCEDE HD			dwg no	10115091		
		Veritical Header, 4 Pair 8 Column							
www.fci.com	cat. no.	-	Product - Customer Drw				sheet 1 of 8		

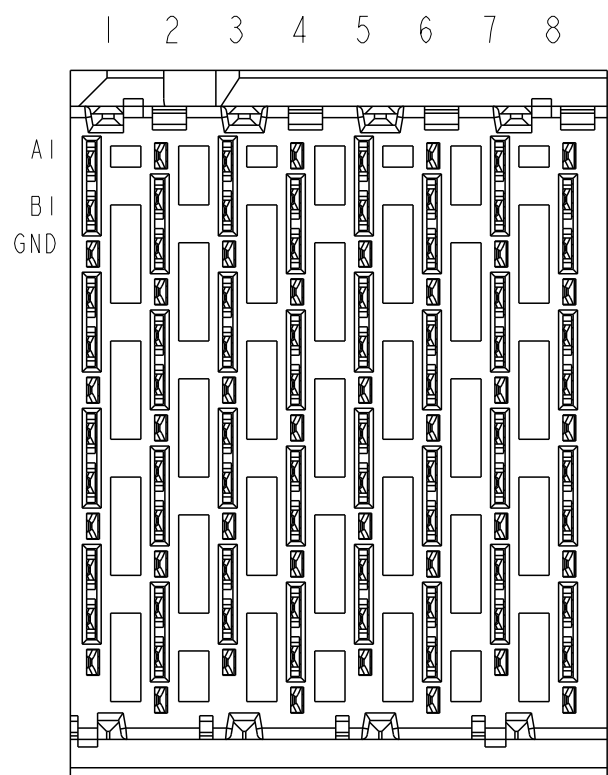




SEE NOTE 5

PIN A1

OPEN WALL MODULE

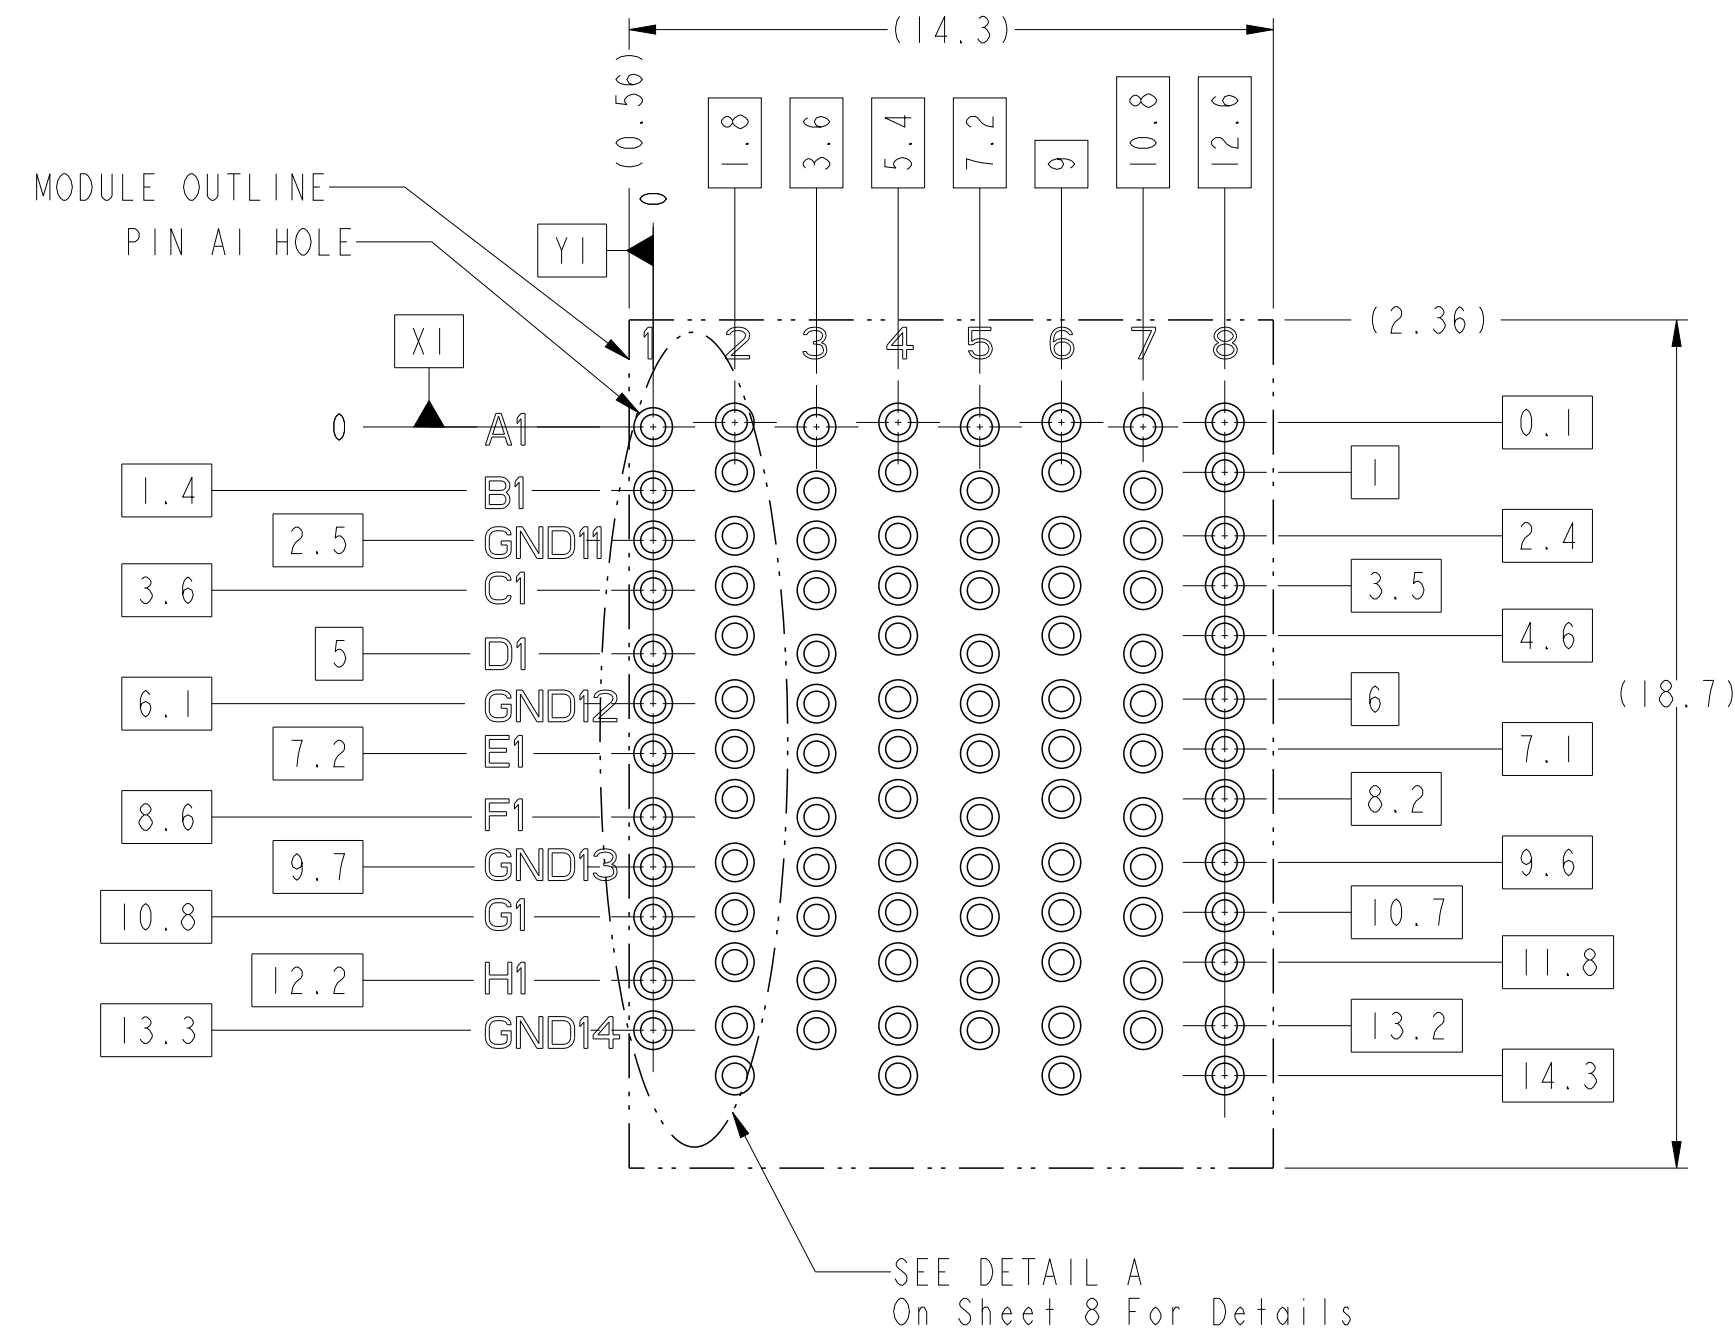

BP HOLE PATTERN COMPONENT SIDE
OPEN WALL MODULE BACKPLANE FOOTPRINT

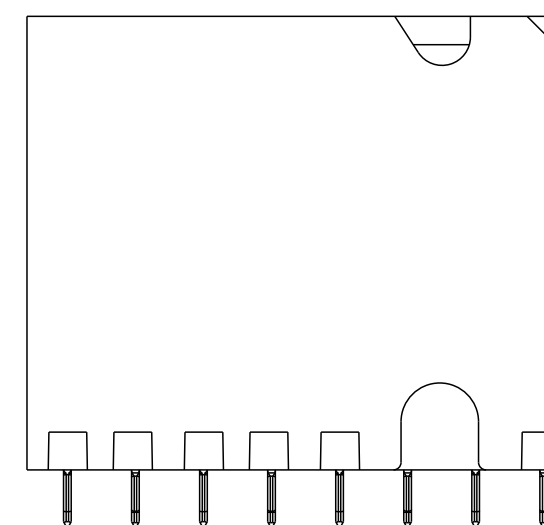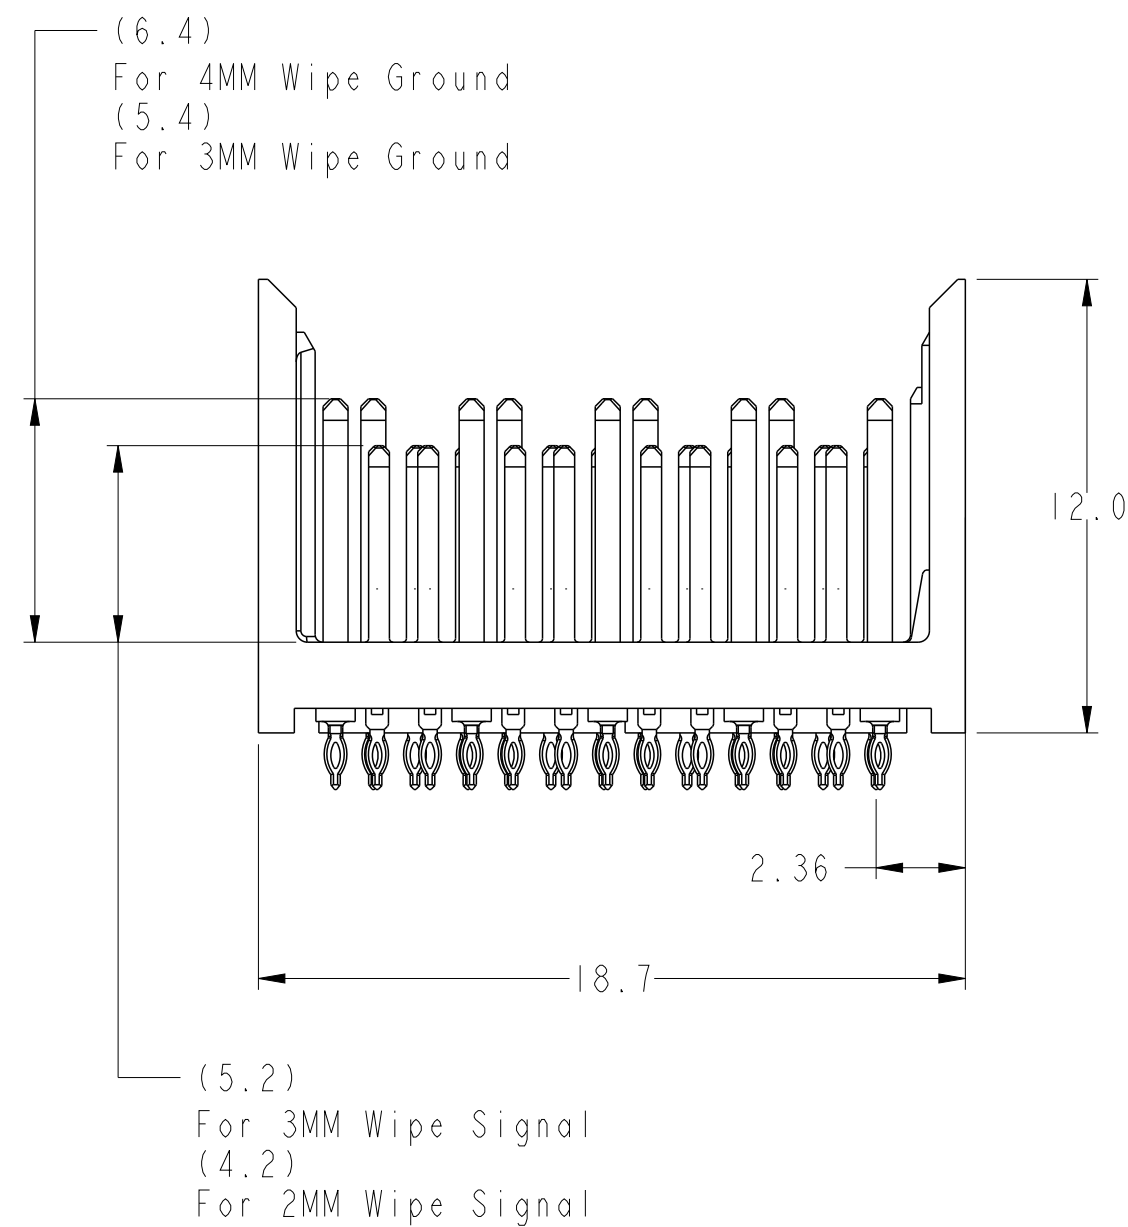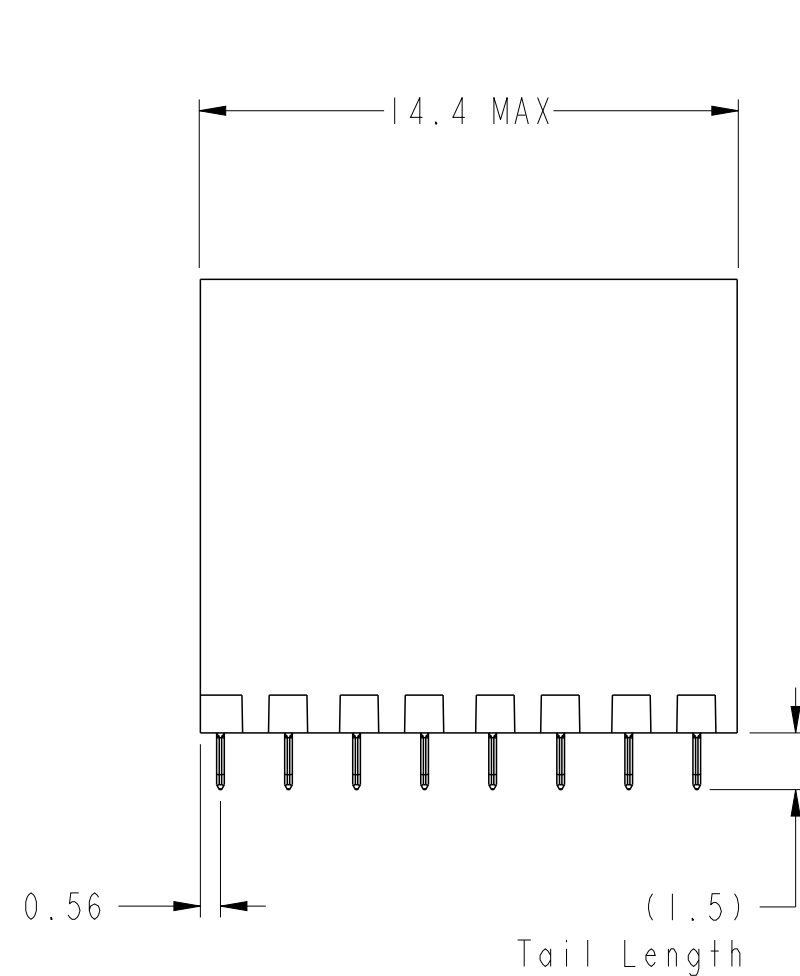


spec ref	-	dr	Collins Lu	2011/07/27	projection	mm	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/07	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	-	cat. no.	-	Product - Customer Drw	sheet 2 of 8
TOLERANCES UNLESS OTHERWISE SPECIFIED		linear		0.X	±0.3	angular		0°	±2°	
				0.XX	±0.10					
				0.XXX	±0.05					





PDS: Rev :E

STATUS:Released


Printed: Mar 17, 2016

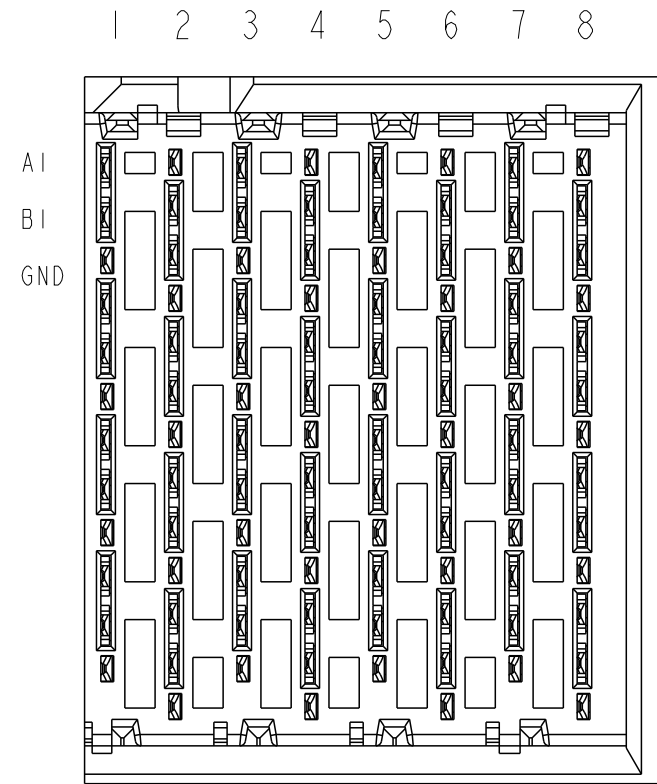

RIGHT WALL MODULE


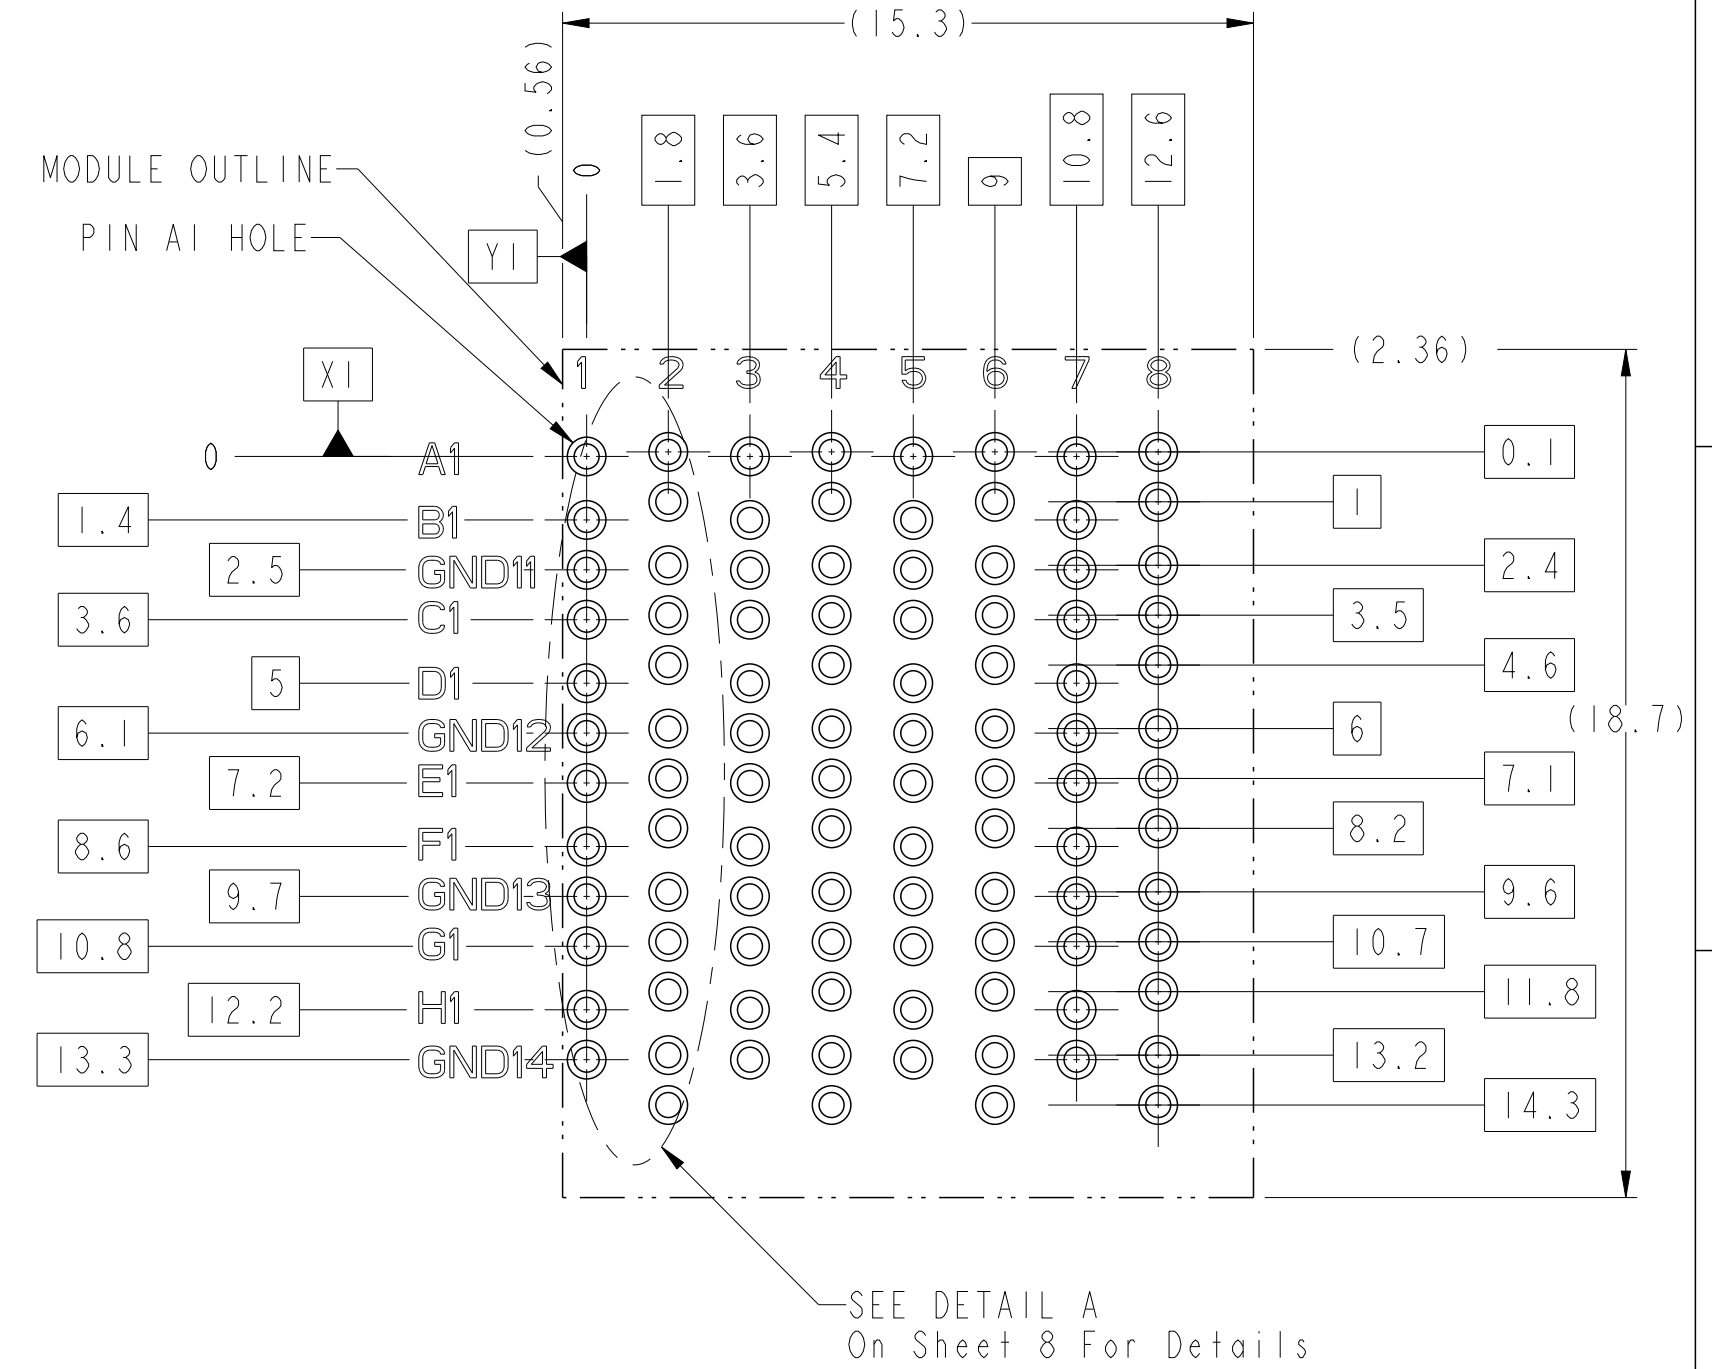
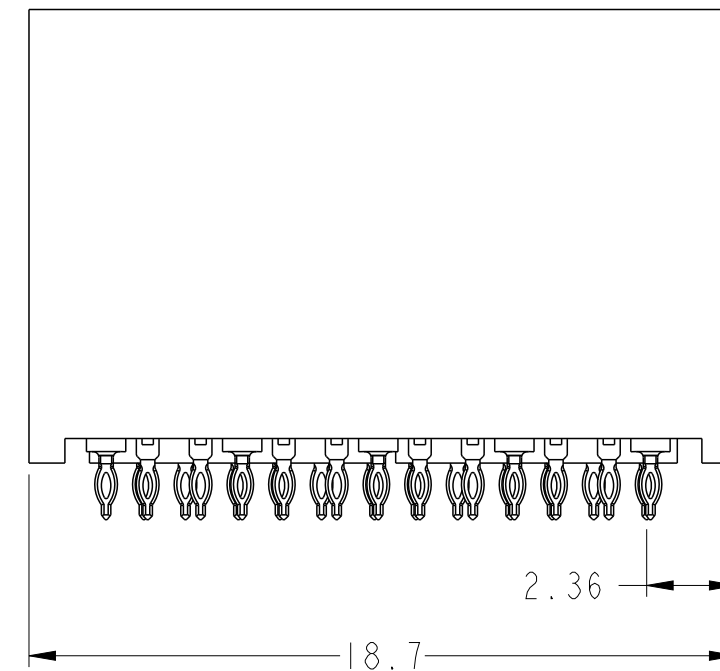
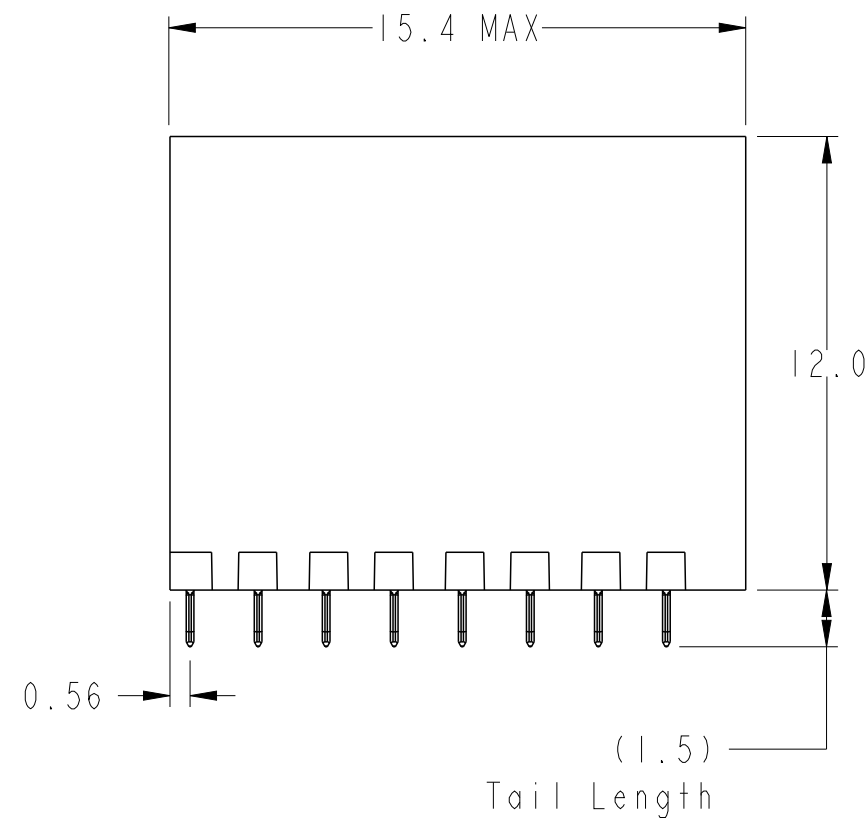
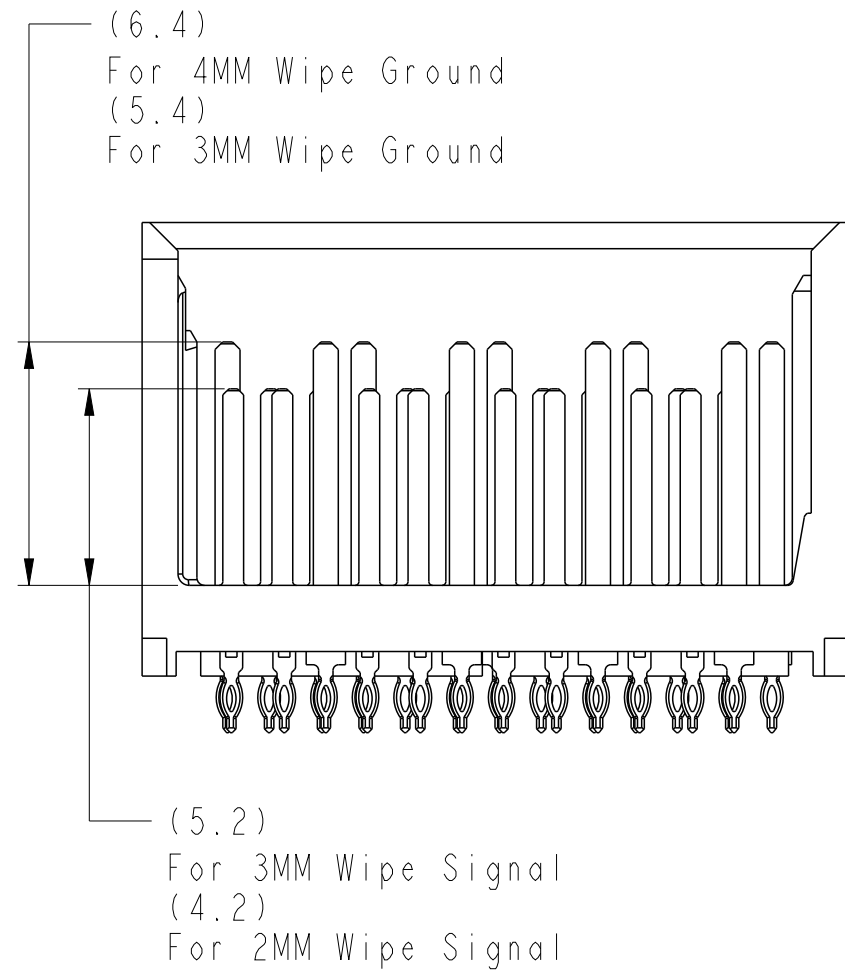


BP HOLE PATTERN COMPONENT SIDE
RIGHT WALL MODULE BACKPLANE FOOTPRINT

spec ref		-		dr		Collins Lu		2011/07/27		projection				mm		size		A2		scale		1:1			
tolerance std		ISO 406 ISO 1101		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Sandar Soe		2016/03/07		chr		-		-		ecn no		ELX-S-17624-1		rel level		Released	
surface		ISO 1302		linear		angular		0°		±2°		Amphenol FCi		title		MODULE ASSEMBLY, XCEDE HD Veritcal Header, 4 Pair 8 Column		dwg no		10115091		rev		E	
appr		Chen-Hong Tan		2016/03/17		product family		-		cat. no.		-		Product - Customer Drw		sheet 4 of 8									



FOUR WALL MODULE

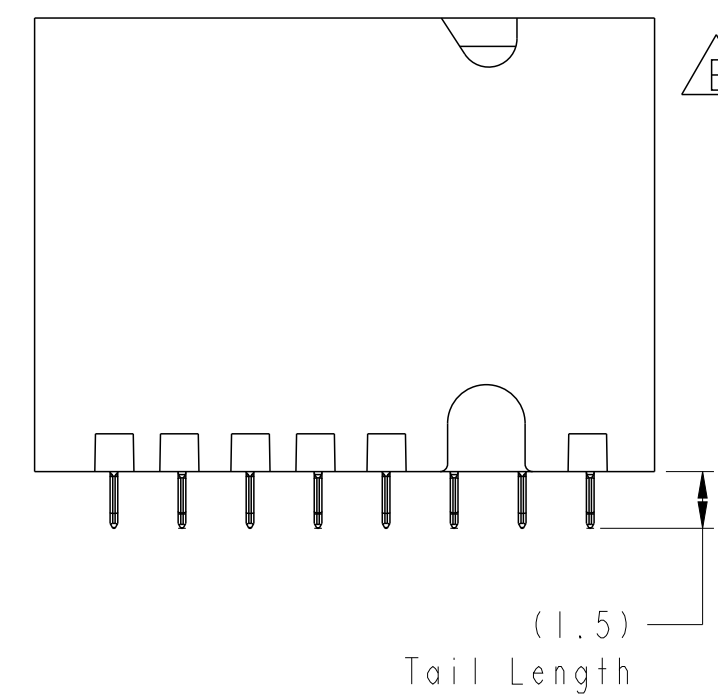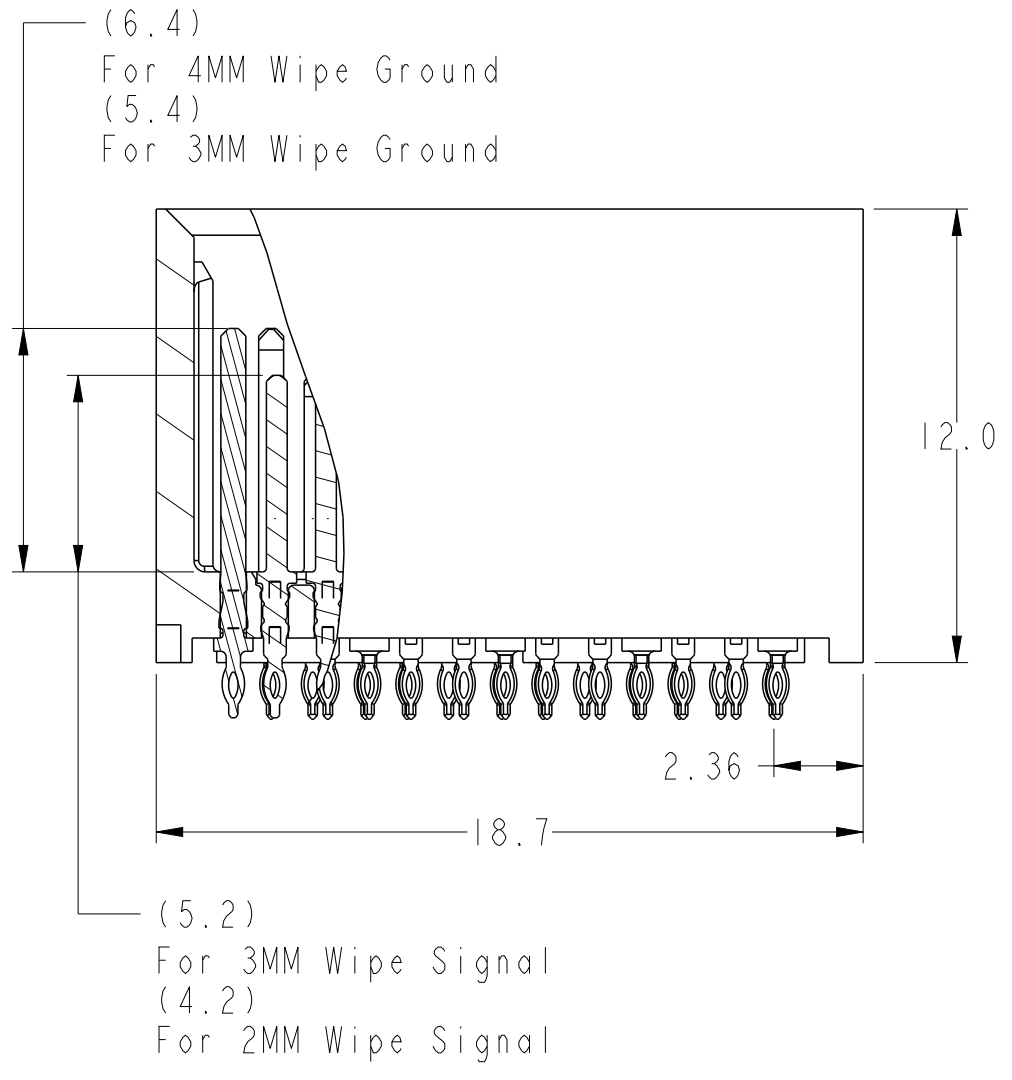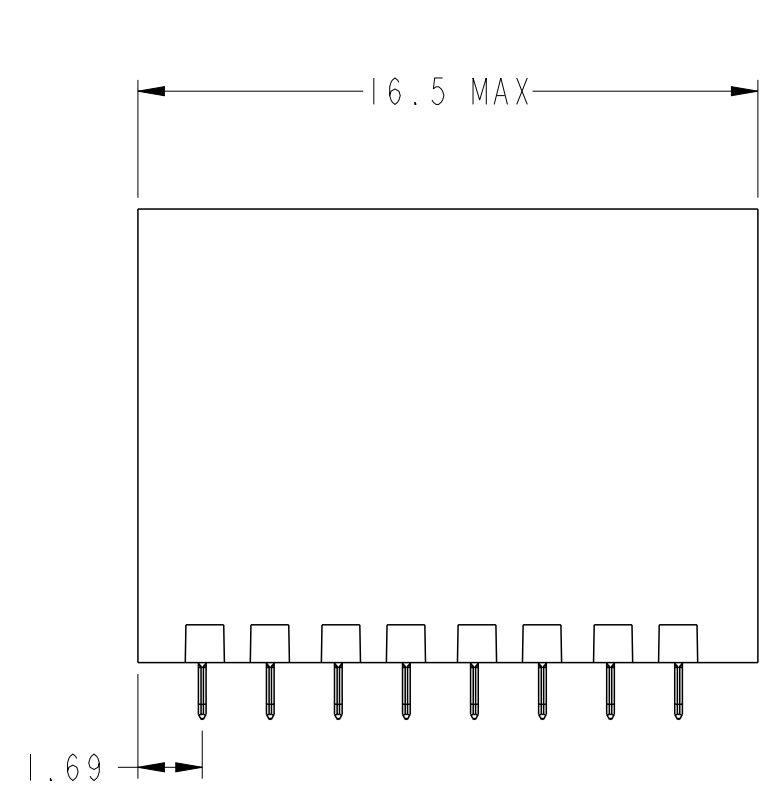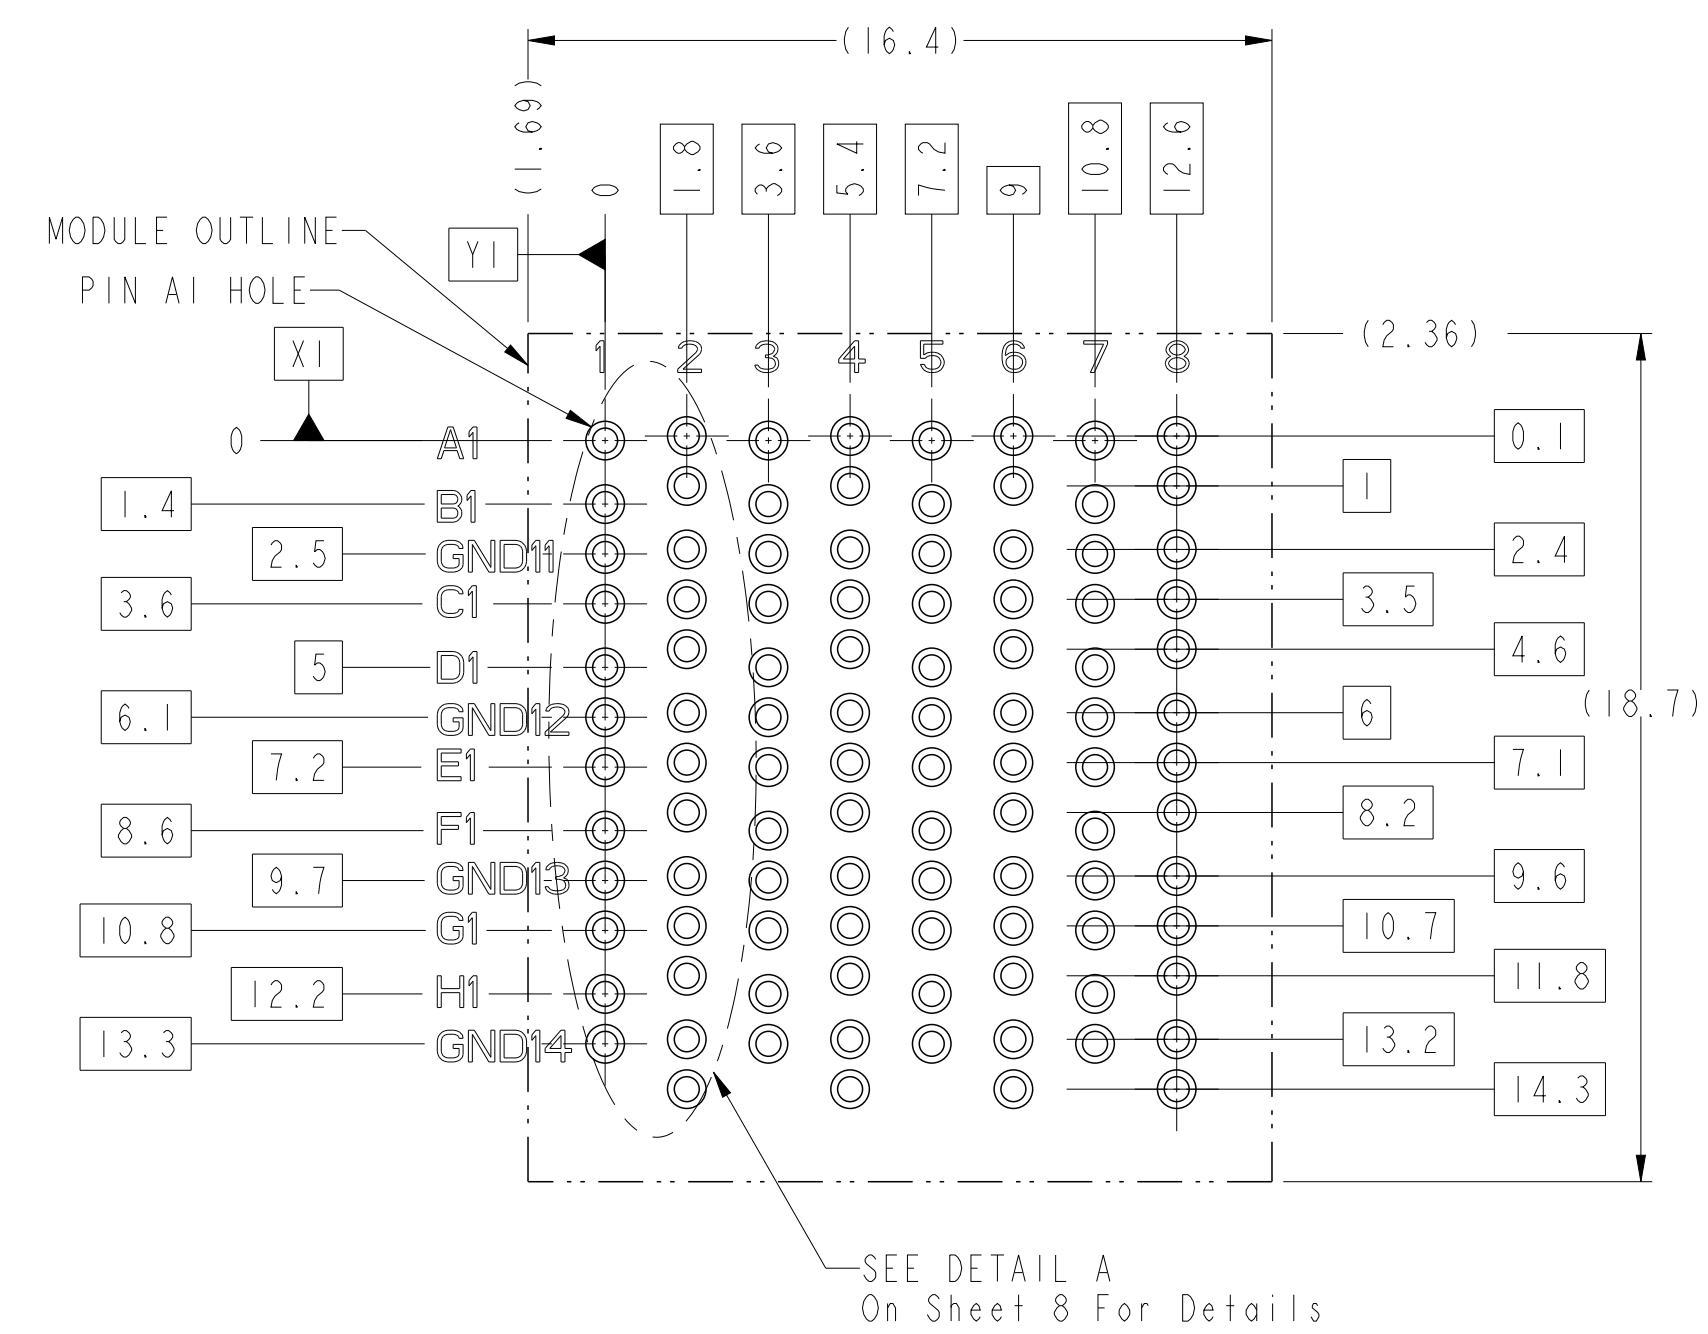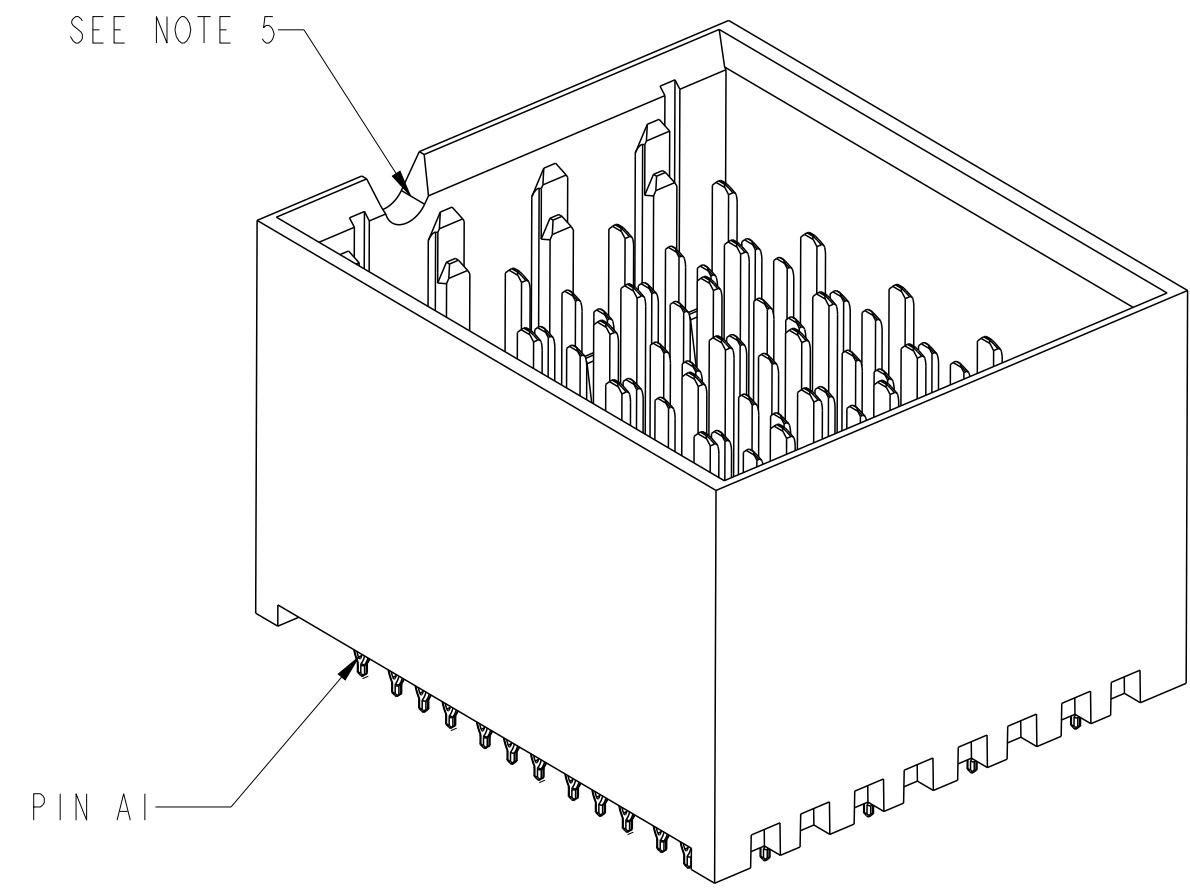

FOUR WALL MODULE BACKPLANE FOOTPRINT

spec ref	-	dr	Collins Lu	2011/07/27	projection	mm	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/07	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	-	cat. no.	Product - Customer Drw	sheet 5 of 8	rev
linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.05	Amphenol FCI	title	MODULE ASSEMBLY, XCEDE HD	dwg no	10115091	rev	E		
angular	0° ±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 5 of 8				

LEFT POLARIZING/GUIDE MODULE

Optional Key See Sheet 1
Part Number Tree

SEE NOTE 5

SEE NOTE 11 & TABLE 1

PIN A1 HOLE

MODULE OUTLINE

Y1

A1

B1

GND11

C1

D1

GND12

E1

F1

GND13

G1

H1

GND14

SEE DETAIL A
OnSheet 8 For Details

BP HOLE PATTERN COMPONENT SIDE

LEFT POLARIZING GUIDE MODULE
BACKPLANE FOOTPRINT

28.5±0.3

(1.5)
Tail Length


(5.2)
For 3MM Wipe Signal
(4.2)
For 2MM Wipe Signal
(6.4)
For 4MM Wipe Ground
(5.4)
For 3MM Wipe Ground

spec ref		-		dr	Collins Lu	2011/07/27	projection		mm		size	scale
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Sandar Soe	2016/03/07	ecn no	ELX-S-17624-1					1:1	
		chr	-	-	rel level	Released						
ISO 406		appr	Chen-Hong Tan	2016/03/17	product family		-					
ISO 1101												
surface		linear	0.X	±0.3	Amphenol FCi	title	MODULE ASSEMBLY, XCEDE HD	dwg no	10115091	rev	E	
			0.XX	±0.10								
			0.XXX	±0.05								
		angular	0°	±2°								
ISO 1302					www.fci.com	cat. no.	-	Product - Customer Drw		sheet 6 of 8		


PDS: Rev :E

STATUS:Released

Printed: Mar 17, 2016

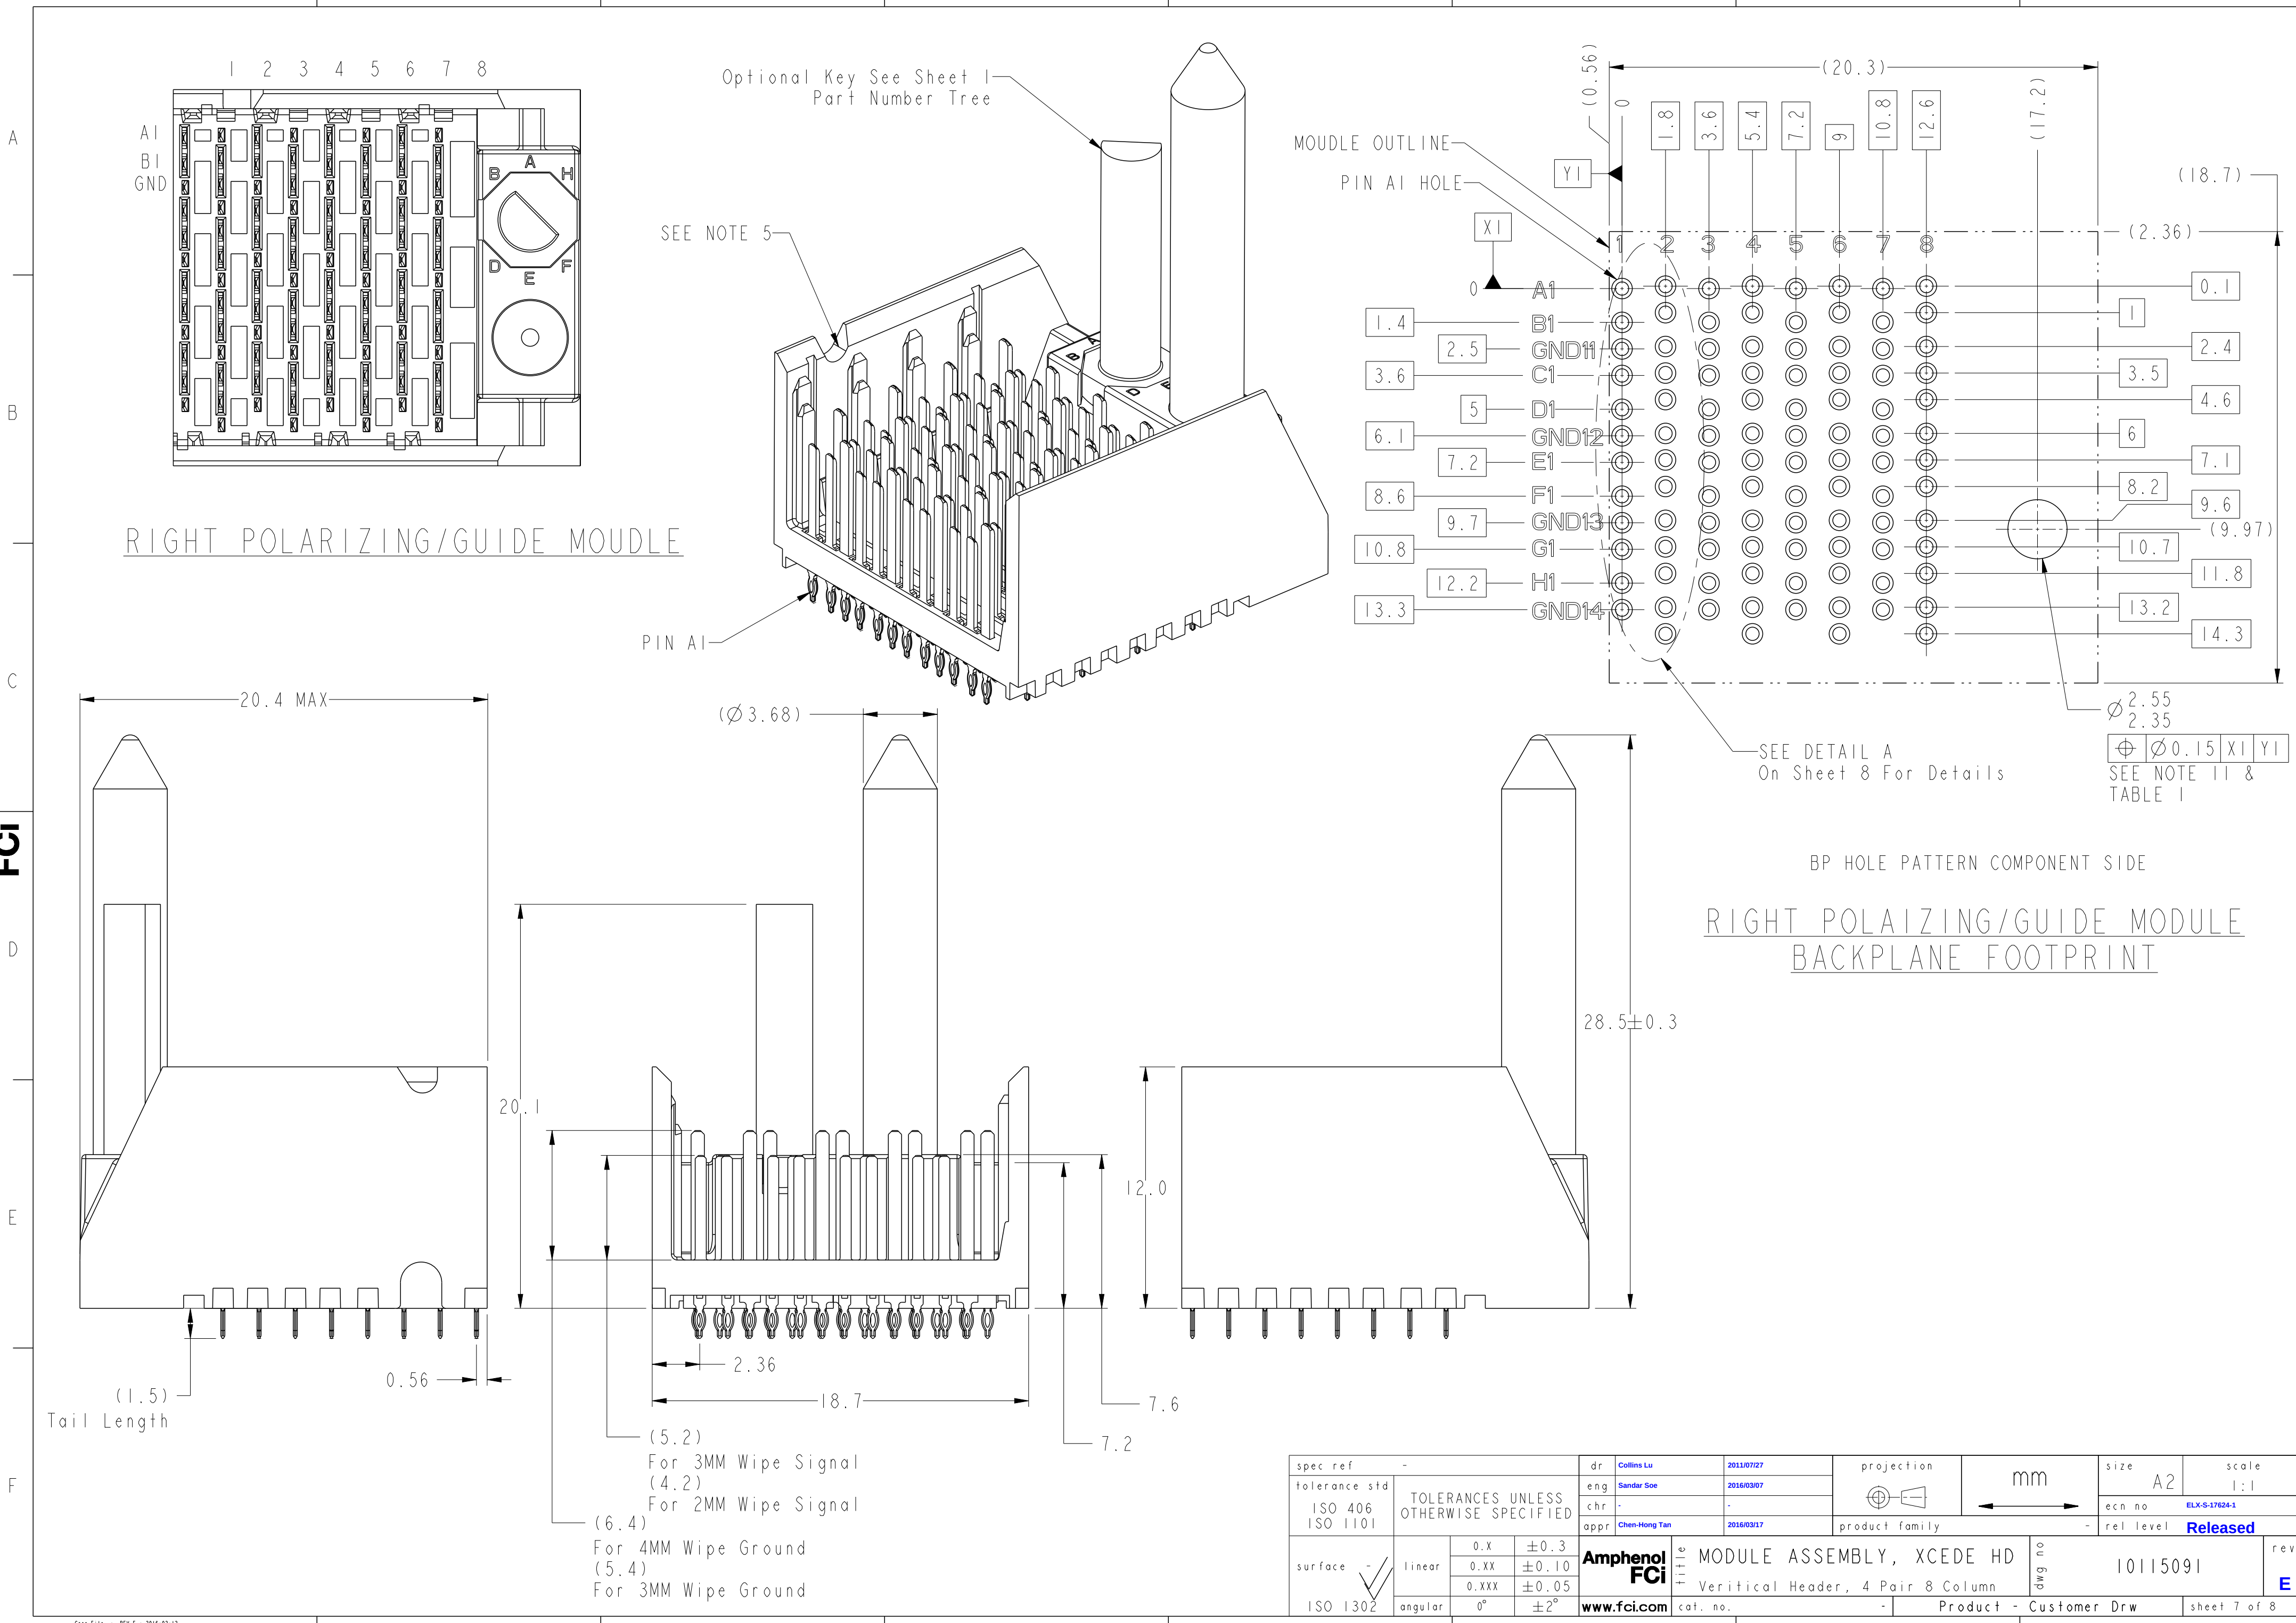

spec ref	-	dr	Collins Lu	2011/07/27	projection	mm	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/07	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.05	angular	0° ±2°	Amphenol FCi	title	MODULE ASSEMBLY, XCEDE HD Veritcal Header, 4 Pair 8 Column	cat. no.	Product - Customer Drw
							dwg no	10115091	rev	E

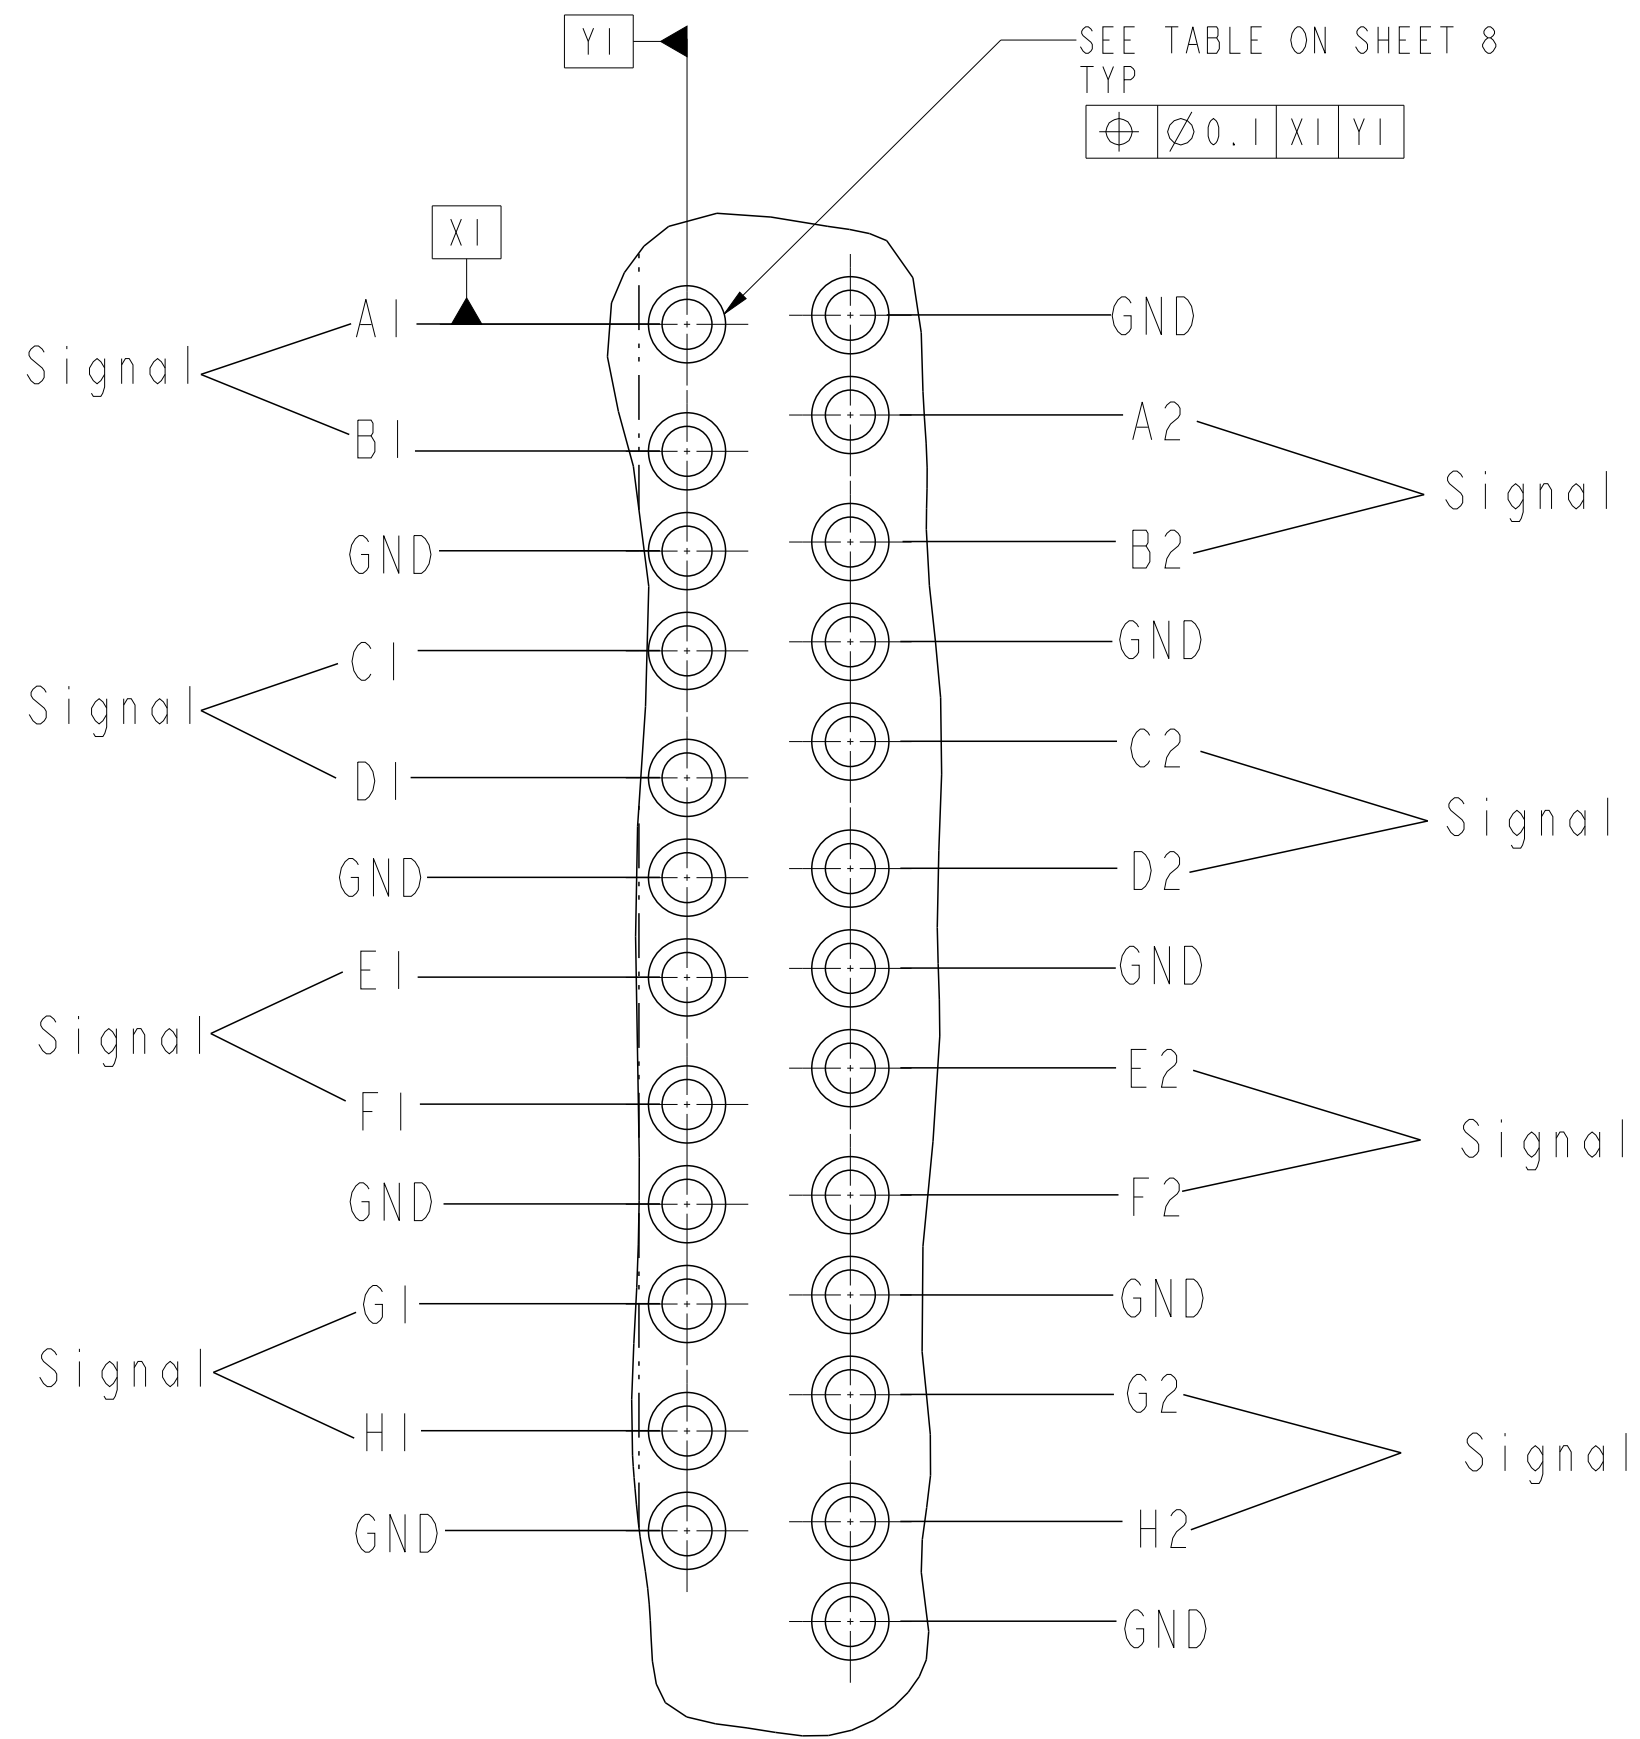

DETAIL A
SCALE 12:1

TABLE 3		
	COMPLIANT PIN DRILL $\varnothing 0.55[0.0217"]$	COMPLIANT PIN DRILL $\varnothing 0.45[0.0177"]$
PTH	$\varnothing 0.45 \pm 0.05$	$\varnothing 0.36 \pm 0.05$
DRILL	$\varnothing 0.55 [0.0217"]$	$\varnothing 0.45 [0.0177"]$
PAD	$\varnothing 0.85$	$\varnothing 0.75$

NOTES:

- CONNECTOR MATERIALS
SHROUD : HIGH-TEMP POLYMER, COLOR : BLACK, UL94V-0
CONTACTS : HIGH PREFORMANCE COPPER ALLOY
- PRODUCT SPECIFICATION : GS-12-0936
- APPLICATION SPECIFICATION : GS-20-0348
- PRODUCT MARKING :
PART NUMBER (10115091-XOE-XXXLF)
"FCI" AND DATE CODE (FCI P#####)
- NOTCH DESIGNATES "ROW A" SIDE OF CONNECTOR. NOTCH FEATURE ON OPPOSITE FOR PRODUCT MARKING.
- PLATING THICKNESS OF SIGNAL & GROUND CONTACT ARE DETERMINED BY PLATING CODE, REFER TO P/N TREE ON SHEET 1.
- PACKAGING MEETS GS-14-920 LEAD-FREE LABELING SPECIFICATION.
- GUIDE-PIN STYLE DESIGNATION ONLY APPLIES TO MODULE VERSIONS THAT REQUIRE GUIDE-PIN HARDWARE. FOR ALL NON-GUIDE-PIN VERSIONS, THE DEFAULT DASH-NUMBER DIGIT IN THAT LOCATION IS STILL '0'.
- SEE APPLICATION SPECIFICATION FOR ROUTING GUIDELINES, ADDITIONAL PTH GUIDELINES, MATED DIMENSIONS, GUIDE PIN SELECTION, ETC.
- A $\triangle$ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE THAT HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.
- OPTIONAL HOLE LOCATION FOR GROUNDED PIN OR ADDITIONAL GUIDE-PIN SUPPORT. SEE TABLE 1 SHEET 1 FOR ADDITIONAL DETAILS.
- SCREW IS OPTIONAL AND ENGAGES WITH BOTTOM OF GUIDE PIN FROM BENEATH THE PCB FOR ADDITIONAL GUIDE-PIN SUPPORT.

spec ref		-		dr		Collins Lu		2011/07/27		projection		mm		size		A2		scale		1:1							
tolerance std		ISO 406 ISO 1101		eng		Sandar Soe		2016/03/07		chr		-		-		ecn no		ELX-S-17624-1									
		TOLERANCES UNLESS OTHERWISE SPECIFIED		appr		Chen-Hong Tan		2016/03/17		product family						rel level		Released									
surface		ISO 1302		linear		0.X ±0.3 0.XX ±0.10 0.XXX ±0.05		angular		0° ±2°		Amphenol FCI		www.fci.com		title		MODULE ASSEMBLY, XCEDE HD Veriticle Header, 4 Pair 8 Column		dwg no		10115091		rev		E	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru