



## ANGLESTAR® PROTRACTOR SYSTEM (APS)

### SPECIFICATIONS

- ◆ Complete angle measurement system
- ◆ Battery or external powered
- ◆ Ranges:  $\pm 19.99^\circ$ ,  $\pm 45.0^\circ$  and 0 to  $+90^\circ$
- ◆ Remote sensing up to 200 feet

The AngleStar® Protractor System (APS) is a ready to use, stand-alone system for angle measurements. The system incorporates an AngleStar® ratiometric electronic clinometer, a digital LCD display, and a four foot interconnecting cable (*cable lengths up to 200 feet are available, consult factory for details*).

This system will operate for 500 hours on one 9 volt battery (not included), or may be powered from an external power source between +9 and +15 VDC, drawing minimal current. The display may be mounted up to 200 feet from the sensor for remote sensing applications such as drilling equipment or tower crane overload protection.

There are three systems to choose from;  $\pm 19.99$  degrees with 0.01 degree resolution,  $\pm 45^\circ$  or 0-90°, both having 0.1 degree resolution.

### FEATURES

- ◆ Separate sensor and display
- ◆ Remote sensing up to 200 feet
- ◆ External power jack
- ◆ 500 hour battery life
- ◆ Integral easel stand for readout

### APPLICATIONS


- ◆ Crane safety systems
- ◆ Crawler drill mast angle
- ◆ Antenna positioning
- ◆ Machine tool angle
- ◆ Platform leveling/monitoring
- ◆ Audio speaker array alignment

**PERFORMANCE SPECIFICATIONS**

ELECTRICAL	
Battery life	500 hours (approx.)
External power	+9 to +15VDC
Linearity	
P/N's 02160023-000 and 02160021-000 (±19.99° & ±45° models)	
Null to 10°	±0.1°
10° to 45°	±1% of reading
P/N 02160025-000 (0 to +90° model)	
0° to +90°	±2% of reading
Null repeatability	±0.1°
Cross axis error	<1%
Sensor time constant	0.3 seconds
Sensor frequency response	0.5Hz
ENVIRONMENTAL/MECHANICAL	
Temperature range	-18° to +55°C (0 to +131°F)
Cable	Four conductors, 26 AWG, PVC jacket, 4 foot length standard

\* All values are nominal unless otherwise noted!

**DIMENSIONS**

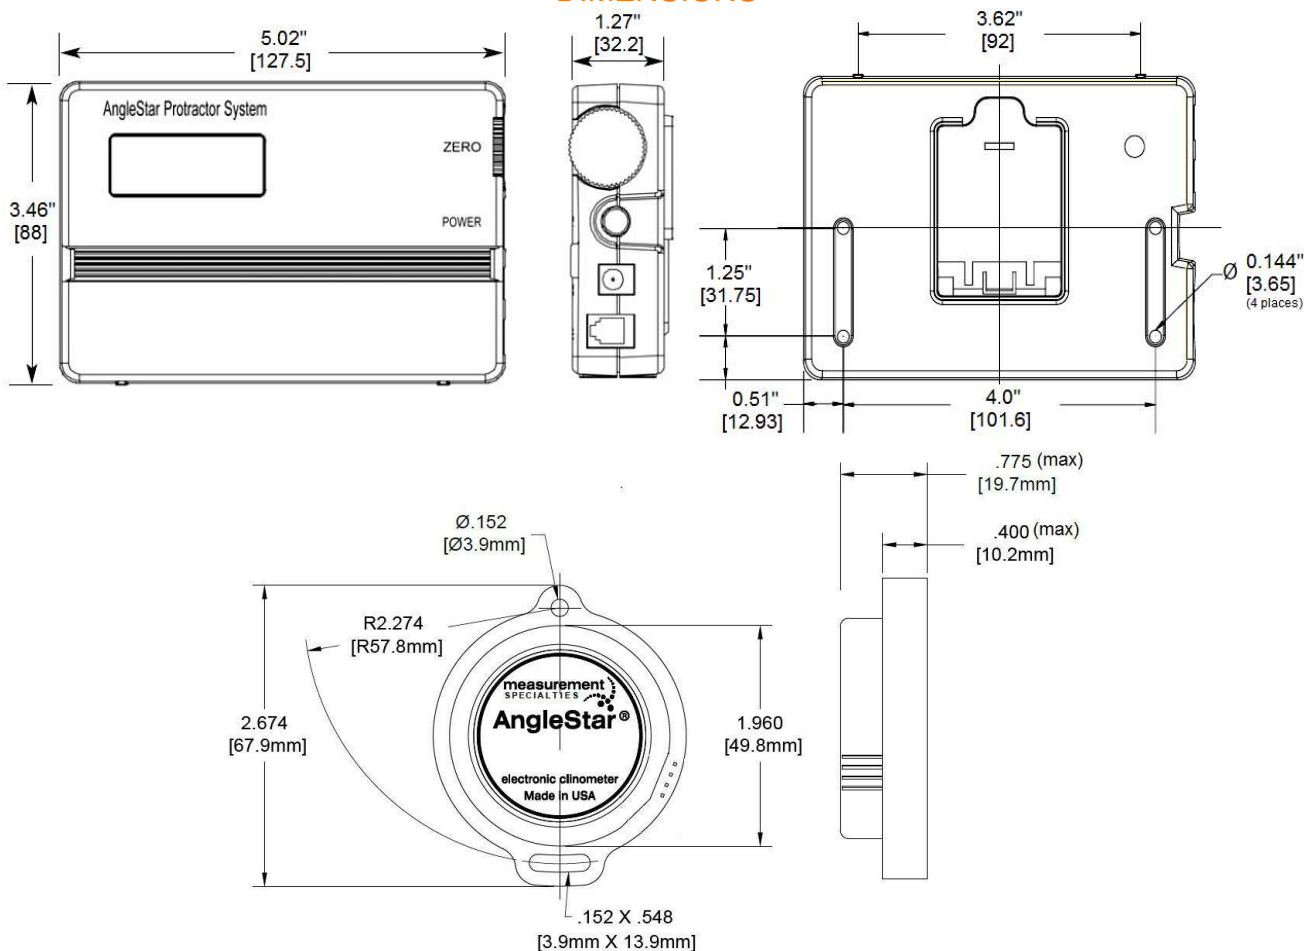

Dimensions are in inches [mm], and are nominal unless otherwise specified

**ORDERING INFORMATION**

MODEL	MEASUREMENT RANGE	PART NUMBER
Standard	±45°	02160021-000
High Resolution	±19.99°	02160023-000
90 Degree	0 to +90°	02160025-000

OPTIONS	
NIST calibration	0216002X-400

ACCESSORIES	
10 foot cable assembly	04160001-010
20 foot cable assembly	04160001-020
30 foot cable assembly	04160001-030
40 foot cable assembly	04160001-040
50 foot cable assembly	04160001-050
100 foot cable assembly	04160001-100
150 foot cable assembly	04160001-150
200 foot cable assembly	04160001-200

**NORTH AMERICA**

Measurement Specialties, Inc.,  
 a TE Connectivity Company  
 Phone: 800-522-6752  
 Email: [customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

**EUROPE**

MEAS Deutschland GmbH (Europe)  
 a TE Connectivity Company  
 Phone: 800-440-5100  
 Email: [customercare.tlse@te.com](mailto:customercare.tlse@te.com)

**ASIA**

Measurement Specialties (China), Ltd.,  
 a TE Connectivity Company  
 Phone: 0400-820-6015  
 Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)