

24CE/924CE

Miniature Safety Electromechanical Switch

FEATURES

- Positive opening operation of Normally Closed contacts conforming to IEC/EN 60947-5-1-3
- Compact construction
- Pre-wired
- Die-cast Zinc housing
- Wide selection of actuators
- Cable length variations
- Side and bottom exit cable
- Simple two-screw mounting
- IP 65/66/67
- UL recognised; CSA certified (924CE), CE compliant, BG approved (24CE)

BENEFITS

- Suitable for applications where space is at a premium
- Fast and easy to install
- Suitable for difficult operating environments
- Application flexibility
- Enhanced choice for application
- Multiple plunger capability



(924CE Series Only)



(24CE Series Only)



The ranges 24CE and 924CE have been tested and approved to meet the requirements of the Low Voltage directive and positive opening safety contacts per IEC/EN 60947-5-1-3. The devices are CE marked. The red colour clearly differentiates this safety component in the application. The 924CE range also has UL and CSA approval.

It is possible for the end user to enhance the safety level of these switches from Category 1 per EN 954-1 on their own to Categories 2, 3 or 4 per EN 954-1 when the switches are used in conjunction with our wide range of FF-SR safety control modules to form a safety system.

Typical applications for these switches would use the roller plunger 24CE18 style in conjunction with cams on doors with hinges. Also available are a range of panel mounting or top mounting versions to ensure that small space or difficult mounting can be simply achieved.

Several contact arrangements are available.

WARNING


MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalogue) is for reference only. DO NOT USE this document as system installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

24CE Series

Miniature Safety Electromechanical Switch




Technical Data

Mechanical life	10 million operations.
Degree of protection	24CE Standard type: IP 66 With boot seal type: IP 67
Temperature range	<i>Operating:</i> 0 °C to +70 °C / 32 °F to +160 °F
Approvals*	IEC 60947-5-1 EN 60947-5-1 ac15 B300 dc13 R300
Electrical	According to IEC/EN 60947-5-1. Rated insulation voltage $U_i = 500$ V. Rated impulse withstand voltage $U_{imp} = 2,5$ kV. Not suitable for isolation. SCPD, Quick blow fuse to IEC 127 suitable for rated current.

* See Standards (page 179)

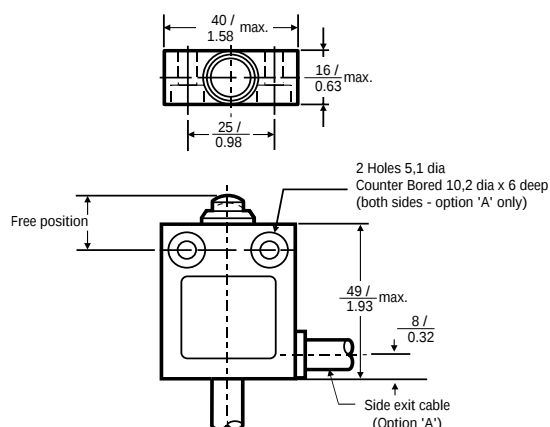Dimensions in mm / in



Cable Type
3 or 5 x 0,75 mm² harmonised CENELEC cable.


Ordering:

24CE


Example: 24CE18-Y1A

Actuator Types

Slow Action Contacts 1 Normally Closed




■ Circuit closed
* Positive opening to IEC/EN 60947-5-1-3




Pin Plunger (Boot Sealed)

18










Roller Plunger Parallel (Boot Sealed)

31



















Roller Plunger Perpendicular (Boot Sealed)


55



Y

X OR XX

Slow Action Contacts 1 Normally Closed/ 1 Normally Open Break before make 	Slow Action Contacts 1 Normally Closed/ 1 Normally Open Make before break 	Cable Length (in metres)	Option Codes Available
		Specify cable length in 1 metre increments e.g. 1 = 1 metre 2 = 2 metre etc.	A: Side Exit Cable.
			
			
			
			
			
			

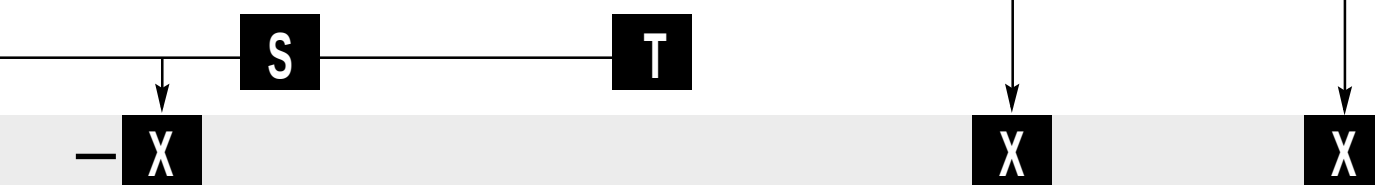


24CE/924CE

924CE Series

Miniature Safety

Electromechanical

Switch



Technical Data

Mechanical life 10 million operations.

Degree of protection 924CE
Standard type: IP 66
With boot seal type: IP 67

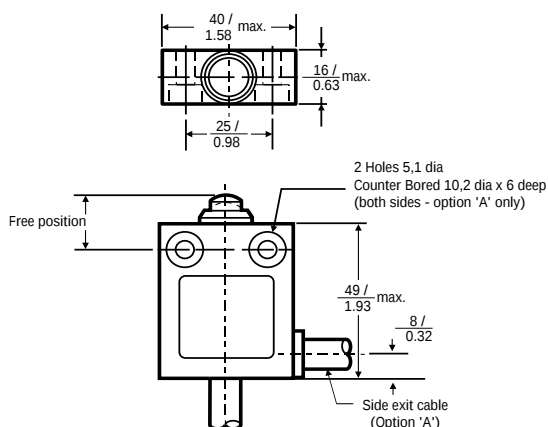
Temperature range *Operating:* 0 °C to +105 °C /
32 °F to +221 °F

Approvals* IEC 60947-5-1
EN 60947-5-1
ac15 B300
dc13 R300
UL, CSA

Electrical According to IEC/EN 60947-5-1.
Rated insulation voltage
 $U_i = 500$ V.
Rated impulse withstand voltage
 $U_{imp} = 2,5$ kV.
Not suitable for isolation.
SCPD, Quick blow fuse to IEC
127 suitable for rated current.

* See Standards (page 179)

Dimensions in mm / in



Cable Type
3 or 5 x 18 AWG SJTO CABLE

Ordering:

















924CE


Example: 924CE18-Y3A

Actuator Types	Slow Action Contacts 1 Normally Closed
	black red green ■ Circuit closed *Positive opening to IEC/EN 60947-5-1-3
	17,1 +/- 0,4 O.P. 13,1 * P.T = 2,2 max. O.F (max.) = 22,5 Newtons / 2300 GMF
	29,9 +/- 0,4 O.P. 25,9 * P.T = 2,2 max. O.F (max.) = 22,5 Newtons / 2300 GMF
	29,9 +/- 0,4 O.P. 25,9 * P.T = 2,2 max. O.F (max.) = 22,5 Newtons / 2300 GMF
	0 Degrees 50 Deg. * P.T = 30 Degrees max. O.F (max.) = 7,85 Newtons / 800 GMF
ø7,1 24,3 max. 18 Pin Plunger (Boot Sealed)	23,9 +/- 0,4 O.P. 19,9 * P.T = 2,2 max. O.F (max.) = 22,5 Newtons / 2300 GMF
ø12,4 36,1 max. 31 Roller Plunger Parallel (Boot Sealed)	35,7 +/- 0,4 O.P. 31,7 * P.T = 2,2 max. O.F (max.) = 22,5 Newtons / 2300 GMF
ø12,4 36,1 max. 55 Roller Plunger Perpendicular (Boot Sealed)	35,7 +/- 0,4 O.P. 31,7 * P.T = 2,2 max. O.F (max.) = 22,5 Newtons / 2300 GMF

Y

X OR XX

Slow Action Contacts 1 Normally Closed/ Break before make	Slow Action Contacts 1 Normally Closed/ Make before break	Cable Length (in feet)	Option Codes
		Specify cable length in 3 feet increments e.g. 3 = 3 feet 6 = 6 feet etc.	A: Side Exit Cable
			
			
			
			
			
			
			

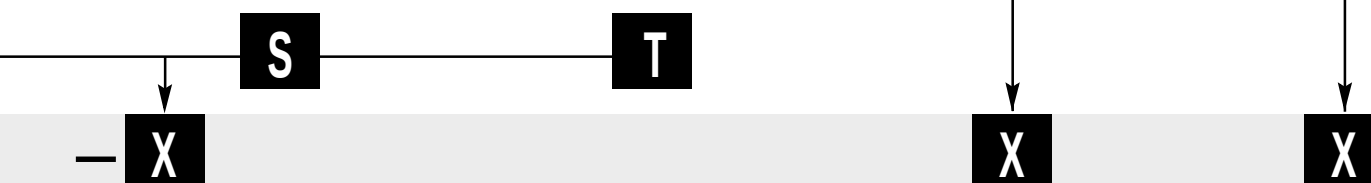

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru