

STANDARD RECOVERY DIODES

Stud Version

Features

- High surge current capability
- Designed for a wide range of applications
- Stud cathode and stud anode version
- Leaded version available
- Types up to 1600V V_{RRM}

40 A

Typical Applications

- Battery charges
- Converters
- Power supplies
- Machine tool controls

Major Ratings and Characteristics

Parameters	40HF(R)		Units
	10 to 120	140 to 160	
$I_{F(AV)}$	40	40	A
@ T_C	140	110	°C
$I_{F(RMS)}$	62		A
I_{FSM} @ 50Hz	570		A
@ 60Hz	595		A
I^2t @ 50Hz	1600		A ² s
@ 60Hz	1450		A ² s
V_{RRM} range	100 to 1200	1400 to 1600	V
T_J range	- 65 to 190	- 65 to 160	°C



case style
DO-203AB (DO-5)

40HF(R) Series

Bulletin I20201 rev. A 09/98

International
IOR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak reverse voltage V	$V_{R(BR)}$, minimum avalanche voltage V (1)	I_{RRM} max. @ $T_J = T_J$ max. mA
40HF(R)	10	100	200	--	15
	20	200	300	--	
	40	400	500	500	
	60	600	720	725	9
	80	800	960	950	
	100	1000	1200	1150	
	120	1200	1440	1350	
	140	1400	1650	1550	4.5
	160	1600	1900	1750	

(1) Avalanche version only available from V_{RRM} 400V to 1600V.

Forward Conduction

Parameter		40HF(R)		Units	Conditions			
		10 to 120	140 to 160					
I _{F(AV)}	Max. average forward current @ Case temperature	40	40	A	180° conduction, half sine wave			
		140	110	°C				
I _{F(RMS)}	Max. RMS forward current	62		A				
P _R	Maximum non-repetitive peak reverse power	11		K · W	10μs square pulse, T _J = T _J max. see note (2)			
I _{FSM}	Max. peak, one-cycle forward, non-repetitive surge current	570		A	t = 10ms	No voltage	Sinusoidal half wave, Initial T _J = T _J max.	
		595			t = 8.3ms	reapplied		
		480			t = 10ms	100% V _{RRM}		
		500			t = 8.3ms	reapplied		
I ² t	Maximum I ² t for fusing	1600		A ² s	t = 10ms	No voltage		
		1450			t = 8.3ms	reapplied		
		1150			t = 10ms	100% V _{RRM}		
		1050			t = 8.3ms	reapplied		
I ² √t	Maximum I ² √t for fusing	16000		A ² √s	t = 0.1 to 10ms, no voltage reapplied			
V _{F(TO)1}	Low level value of threshold voltage	0.65		V	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , T _J = T _J max.			
V _{F(TO)2}	High level value of threshold voltage	0.70			(I > π × I _{F(AV)}), T _J = T _J max.			
r _{f1}	Low level value of forward slope resistance	4.29		mΩ	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , T _J = T _J max.			
r _{f2}	High level value of forward slope resistance	3.98			(I > π × I _{F(AV)}), T _J = T _J max.			
V _{FM}	Max. forward voltage drop	1.30		V	I _{pk} = 125A, T _J = 25°C, t _p = 400μs rectangular wave			

(2) Available only for Avalanche version, all other parameters the same as 40HF.

Thermal and Mechanical Specifications

Parameter		40HF(R)		Units	Conditions
		10 to 120	140 to 160		
T _J	Max. junction operating temperature range	-65 to 190	-65 to 160	°C	
T _{stg}	Max. storage temperature range	-65 to 190	-65 to 160		
R _{thJC}	Max. thermal resistance, junction to case	1.0		K/W	DC operation
R _{thCS}	Max. thermal resistance, case to heatsink	0.25			Mounting surface, smooth, flat and greased
T	Max. allowed mounting torque ±10%	2.3 - 3.4		Nm	Not lubricated threads
		20 - 30		lbf·in	
wt	Approximate weight	17 (0.6)		g (oz)	
Case style		DO-203AB (DO5)			See Outline Table

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.14	0.10	K/W	$T_J = T_{J \text{ max.}}$
120°	0.16	0.17		
90°	0.21	0.22		
60°	0.30	0.31		
30°	0.50	0.50		

Ordering Information Table

Device Code				
	40	HF	R	160 M
	①	②	③	④ ⑤
1	- 40 = Standard device 41 = Not isolated lead 42 = Isolated lead with silicone sleeve (Red = Reverse polarity) (Blue = Normal polarity)			
2	- HF = Standard diode HA = Avalanche diode			
3	- None = Stud Normal Polarity (Cathode to Stud) R = Stud Reverse Polarity (Anode to Stud)			
4	- Voltage code: Code x 10 = V_{RRM} (See Voltage Ratings table)			
5	- None = Stud base DO-203AB (DO-5) 1/4" 28UNF-2A M = Stud base DO-203AB (DO-5) M6 X 1 - (Not available for Avalanche diodes)			

Bulletin I20201 rev. A 09/98

40HF(R)
Case Style DO-203AB (DO-5)
All dimensions in millimeters (inches)

11 ± 0.4 (0.44) ± (0.02) 25.4 (1) MAX.
10.8 (0.42) 11.4 (0.45) 4 (0.16) MIN.
6.1 / 7 (0.24) / (0.27)
14.5 (0.57)
1/4" 28 UNF-2A
For metric devices: M6 x 1

41HF(R)
Case Style DO-203AB (DO-5)
All dimensions in millimeters (inches)

11 (0.43) MAX.
6.3 (0.25) MAX.
118.4 (4.66) MAX.
107 (4.21) MAX.

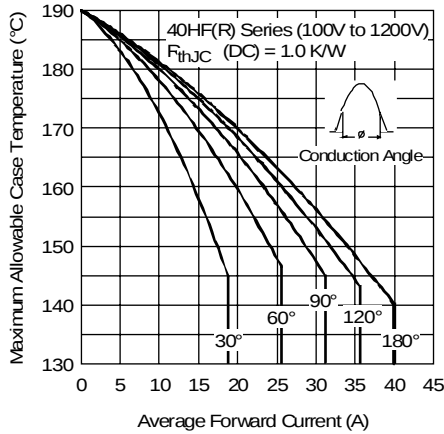


Fig. 1 - Current Ratings Characteristics

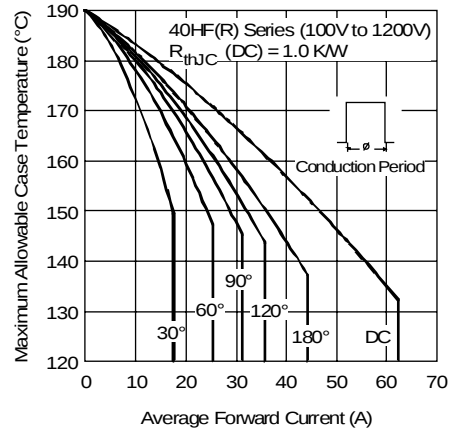


Fig. 2 - Current Ratings Characteristics

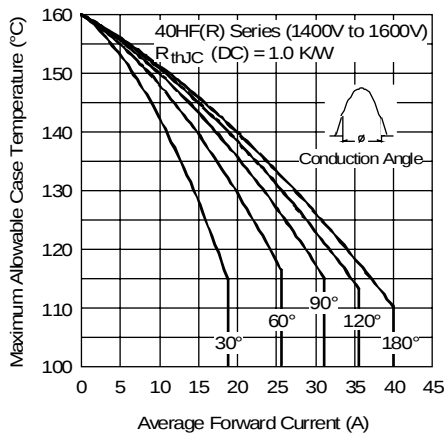


Fig. 3 - Current Ratings Characteristics

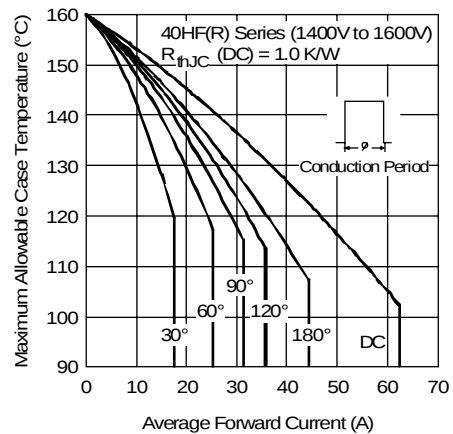


Fig. 4 - Current Ratings Characteristics

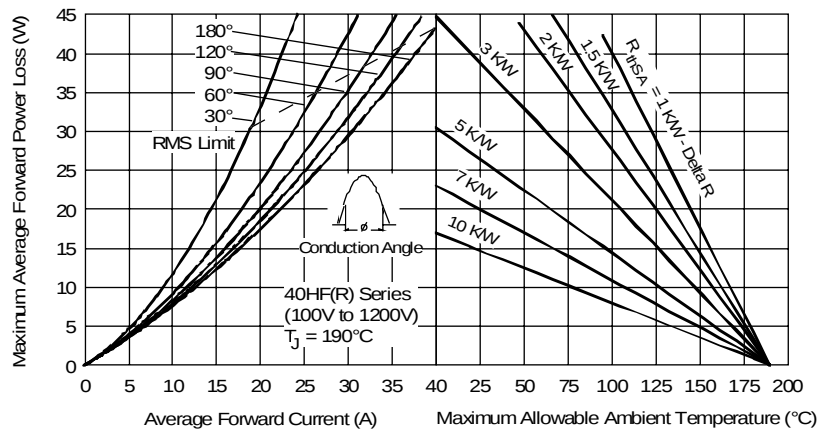


Fig. 5 - Forward Power Loss Characteristics

40HF(R) Series

Bulletin I20201 rev. A 09/98

International
IOR Rectifier

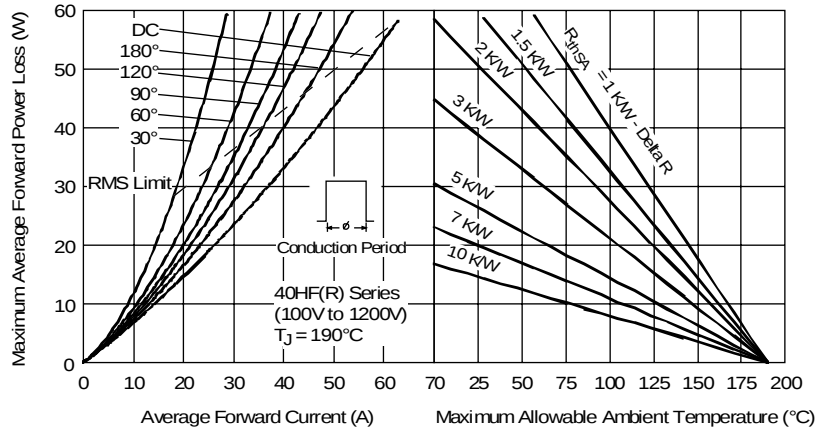


Fig. 6 - Forward Power Loss Characteristics

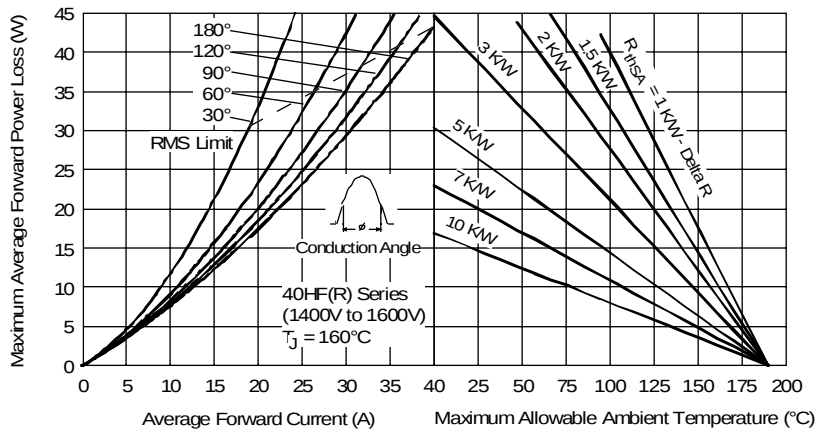


Fig. 7 - Forward Power Loss Characteristics

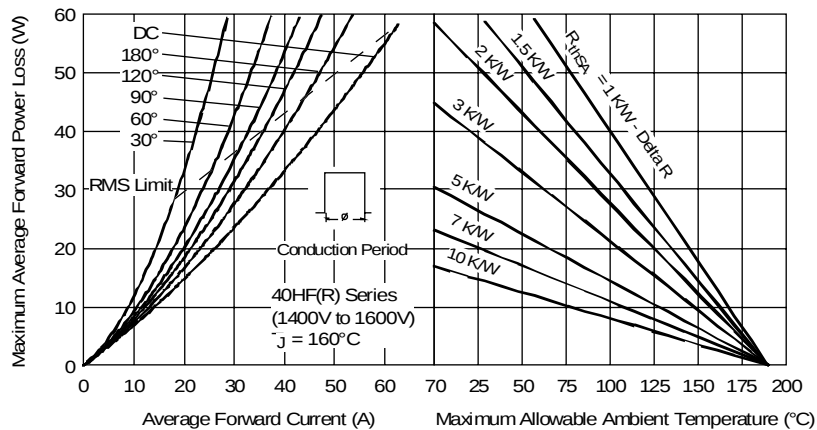


Fig. 8 - Forward Power Loss Characteristics

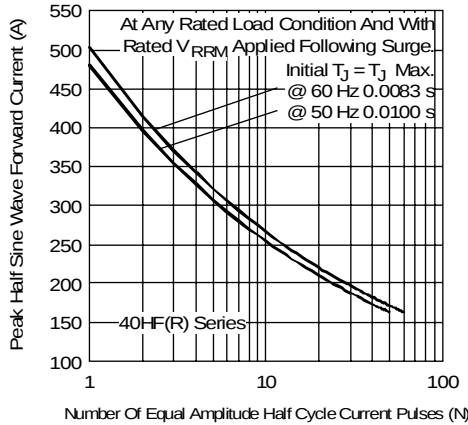


Fig. 9 - Maximum Non-Repetitive Surge Current

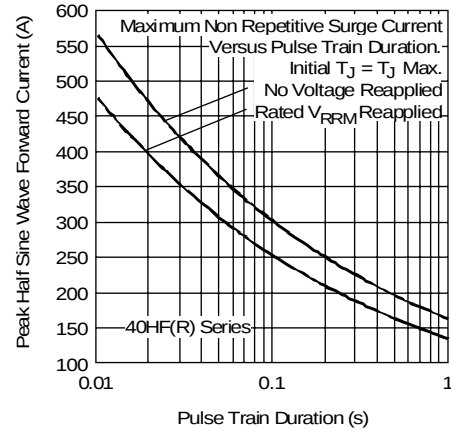


Fig. 10 - Maximum Non-Repetitive Surge Current

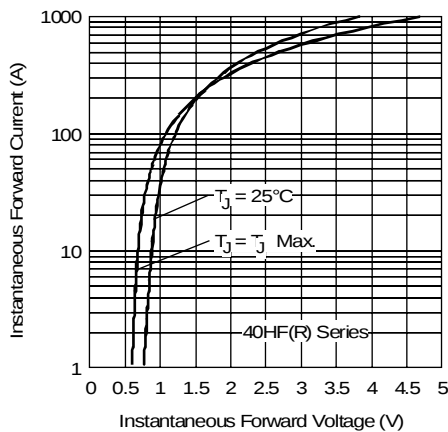


Fig. 11 - Forward Voltage Drop Characteristics

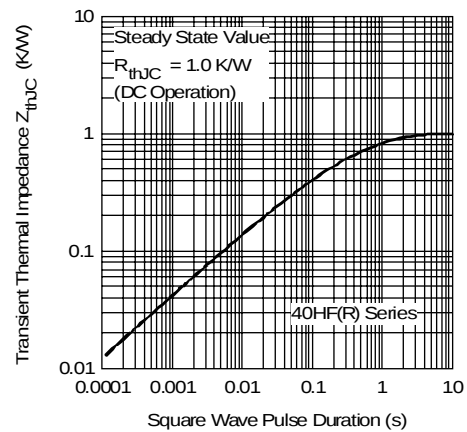


Fig. 12 - Thermal Impedance Z_{thJC} Characteristics

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru