

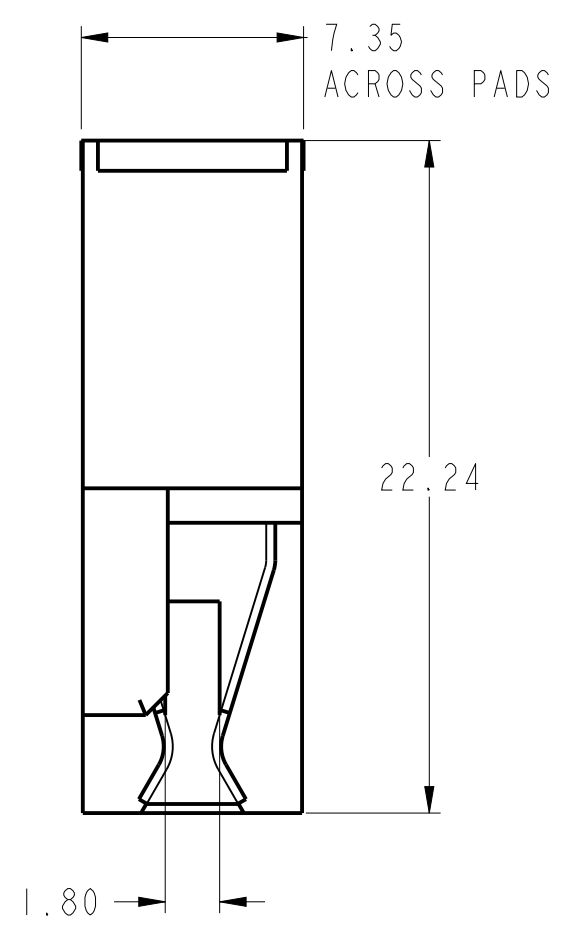
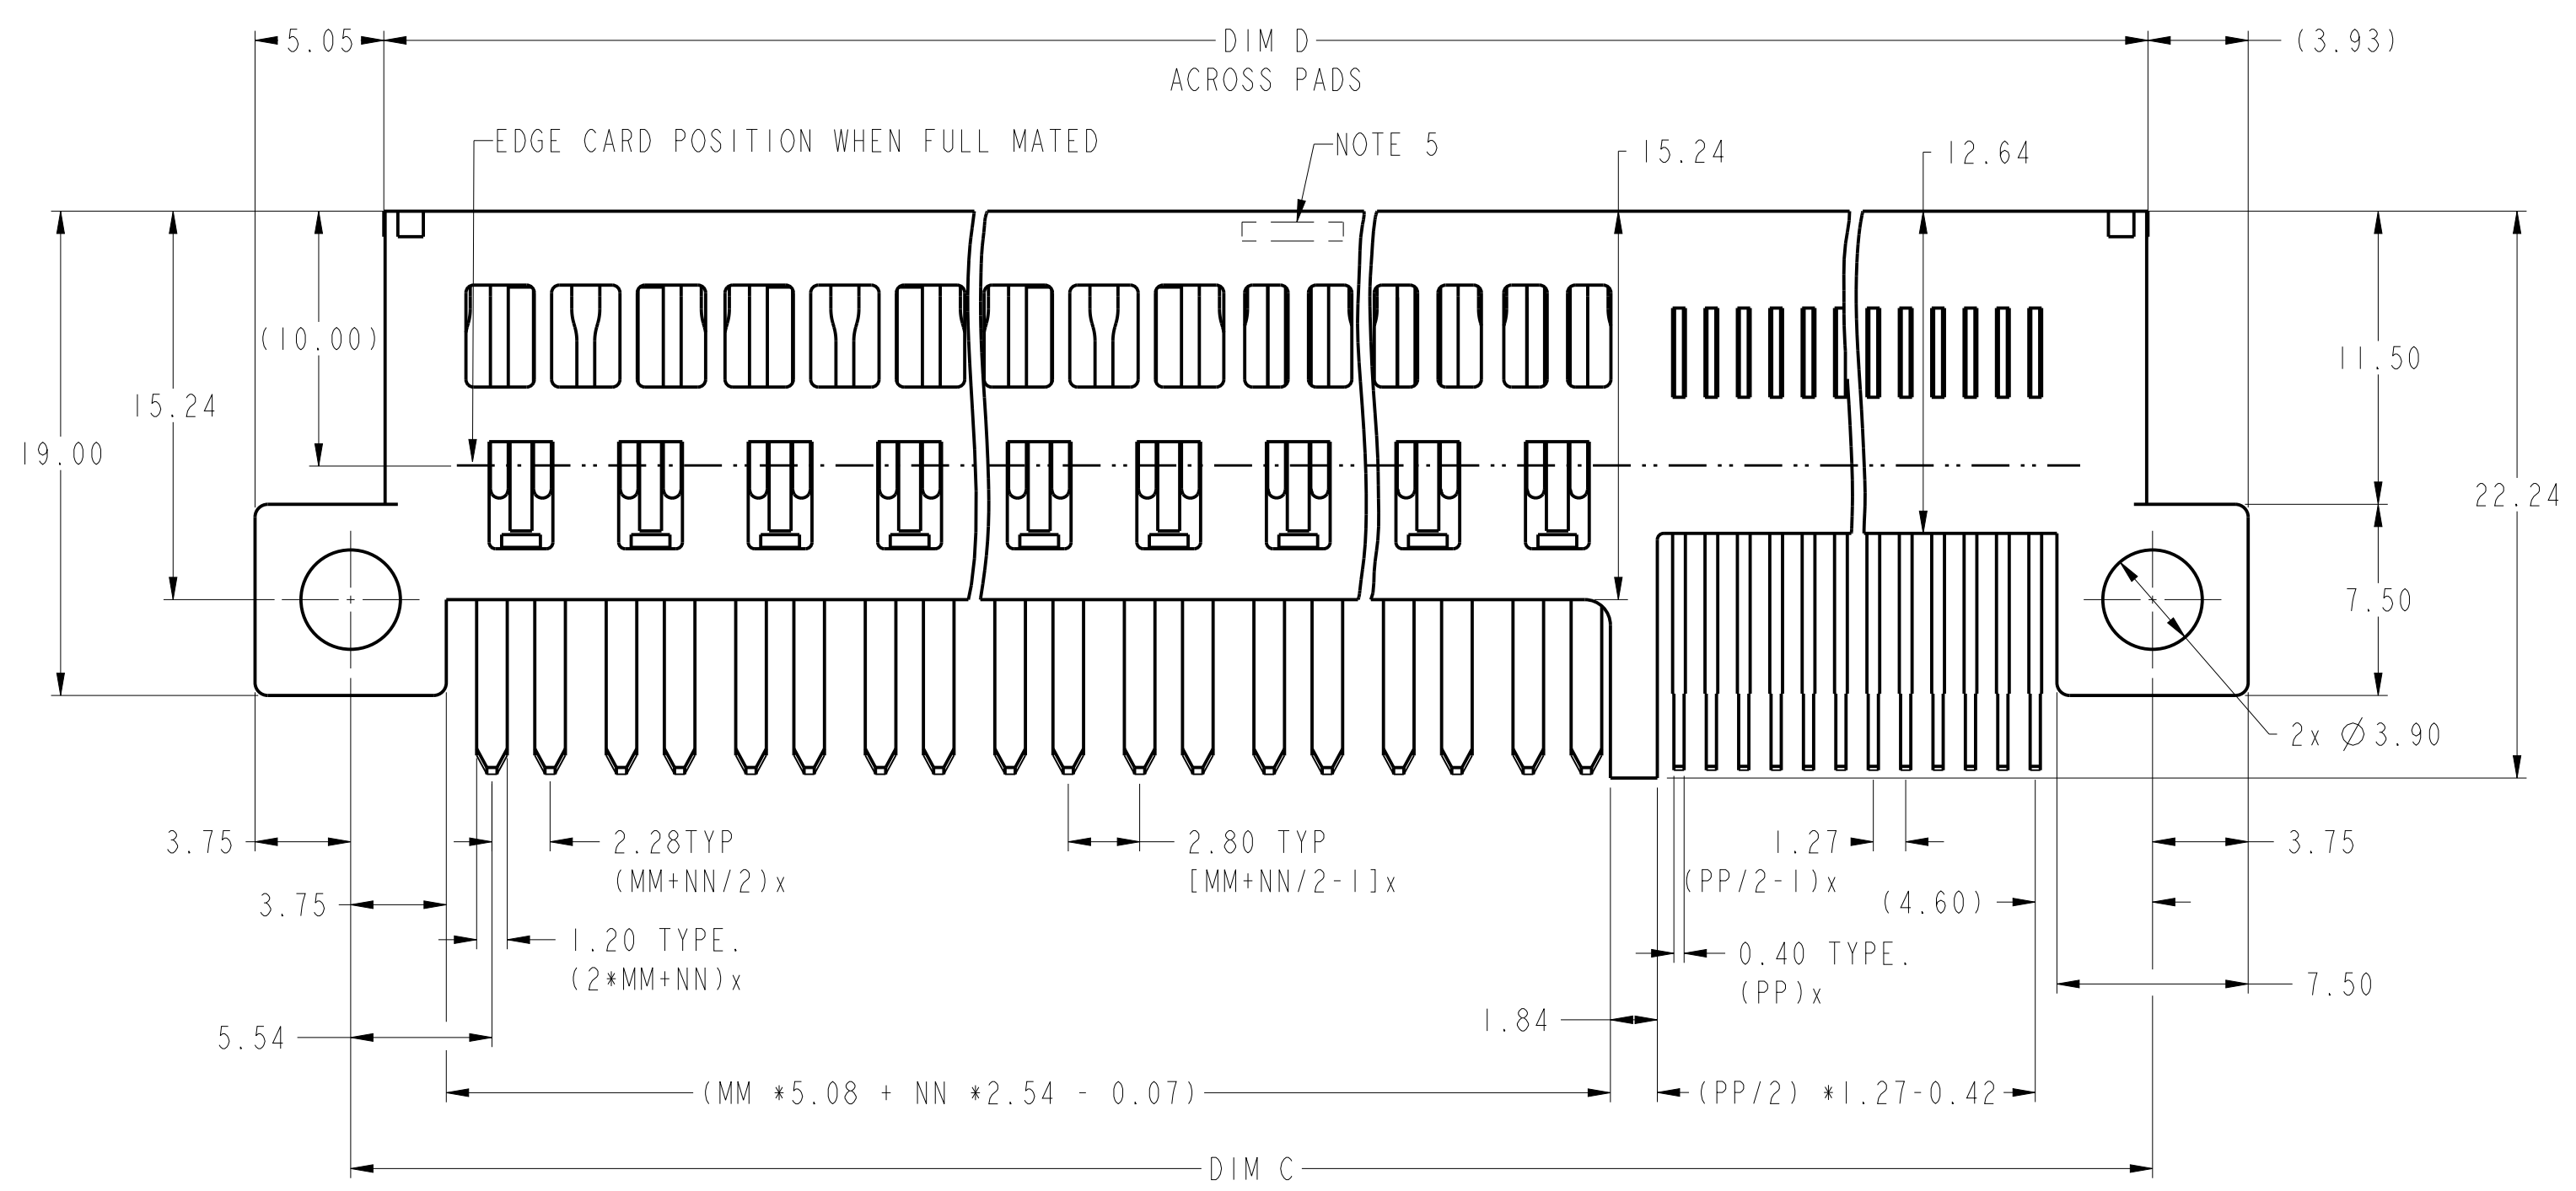


Amphenol
FCi


© 2016 AFCI

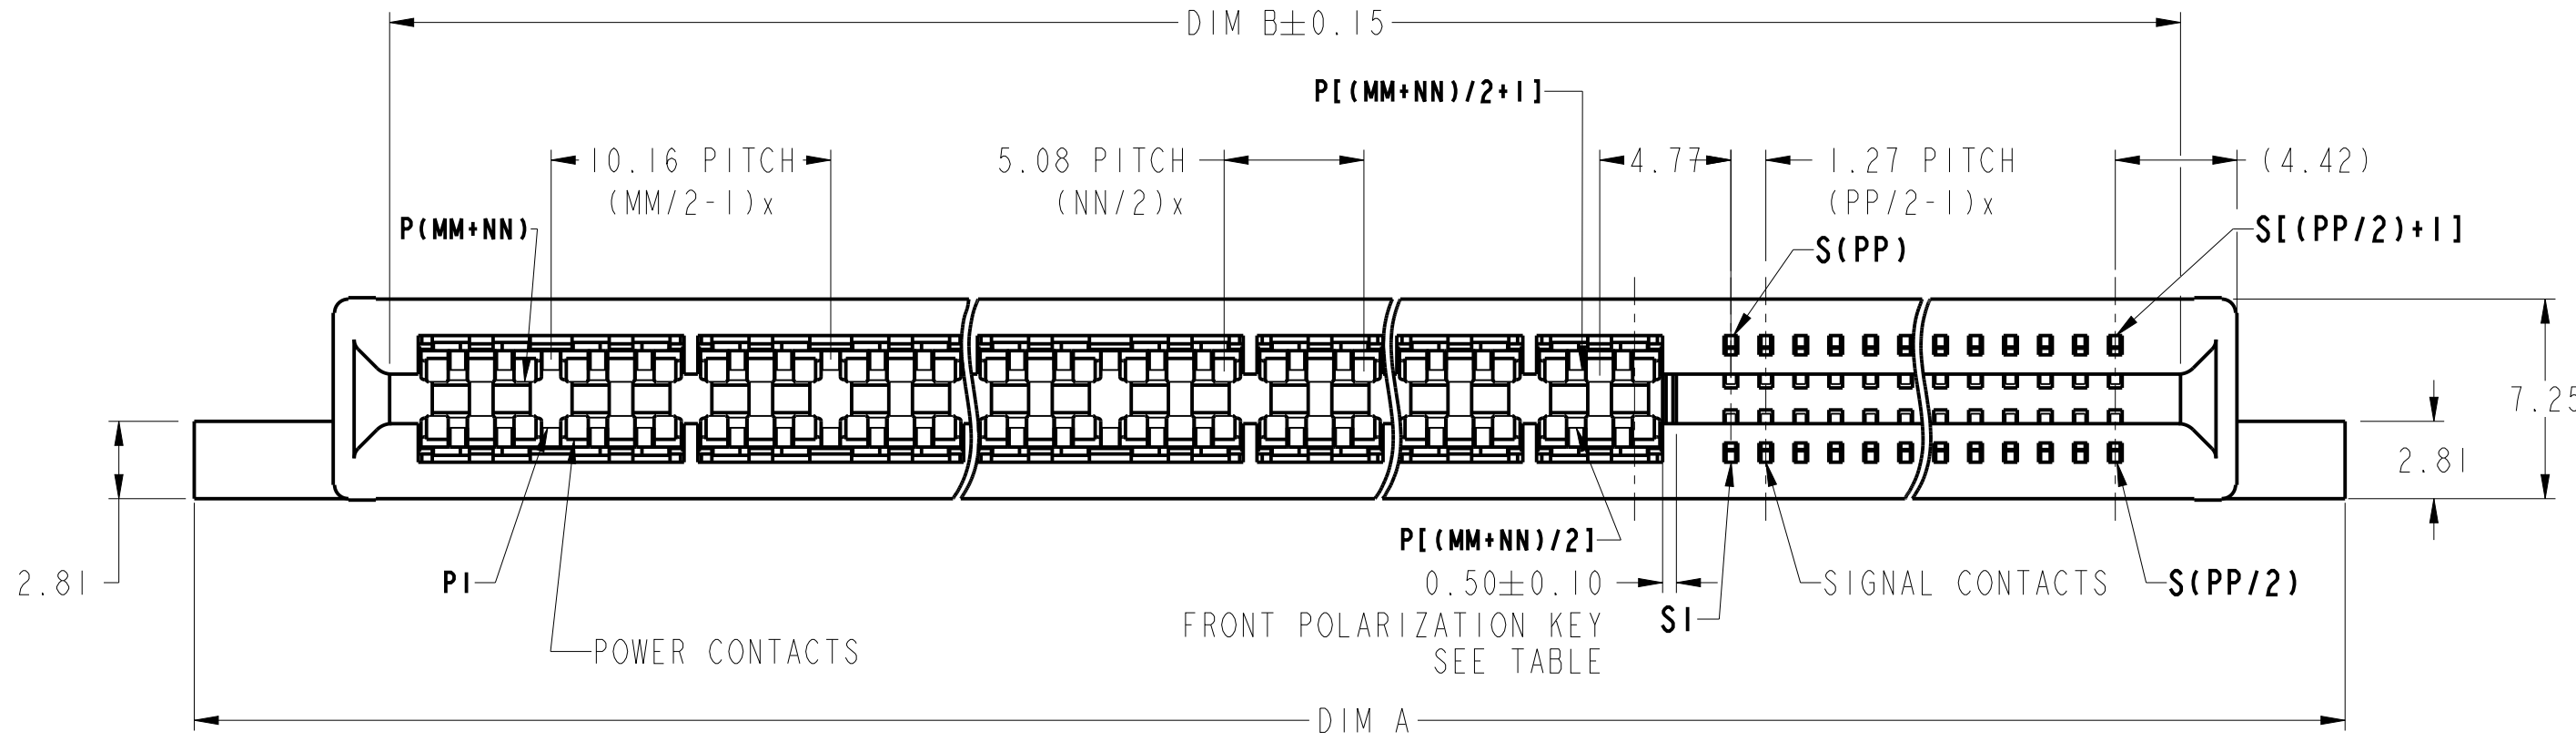


spec ref	-	dr	Andy Lu	2015-12-24	projection	MM	size	A2	scale	4:1
tolerance std	ISO 406 ISO 1101	eng	Andy Lu	2018-03-07	chr	Fancy Zhang	2018-03-07	ecn no	-	
surface	ISO 1302	appr	PM Zheng	2018-03-07	product family	CARD EDGE	rel level	In Work		
linear	0.X ±0.5 0.XX ±0.25 0.XXX ±0.13	Amphenol FCi	eHPCE STRADDLE MOUNT (UP+MP+S) - UNIVERSAL DRAWING				dwg no	10137755	rev	5
angular	0° ±2°	cat. no.	-	Product - Customer Drw	sheet 1 of 5					

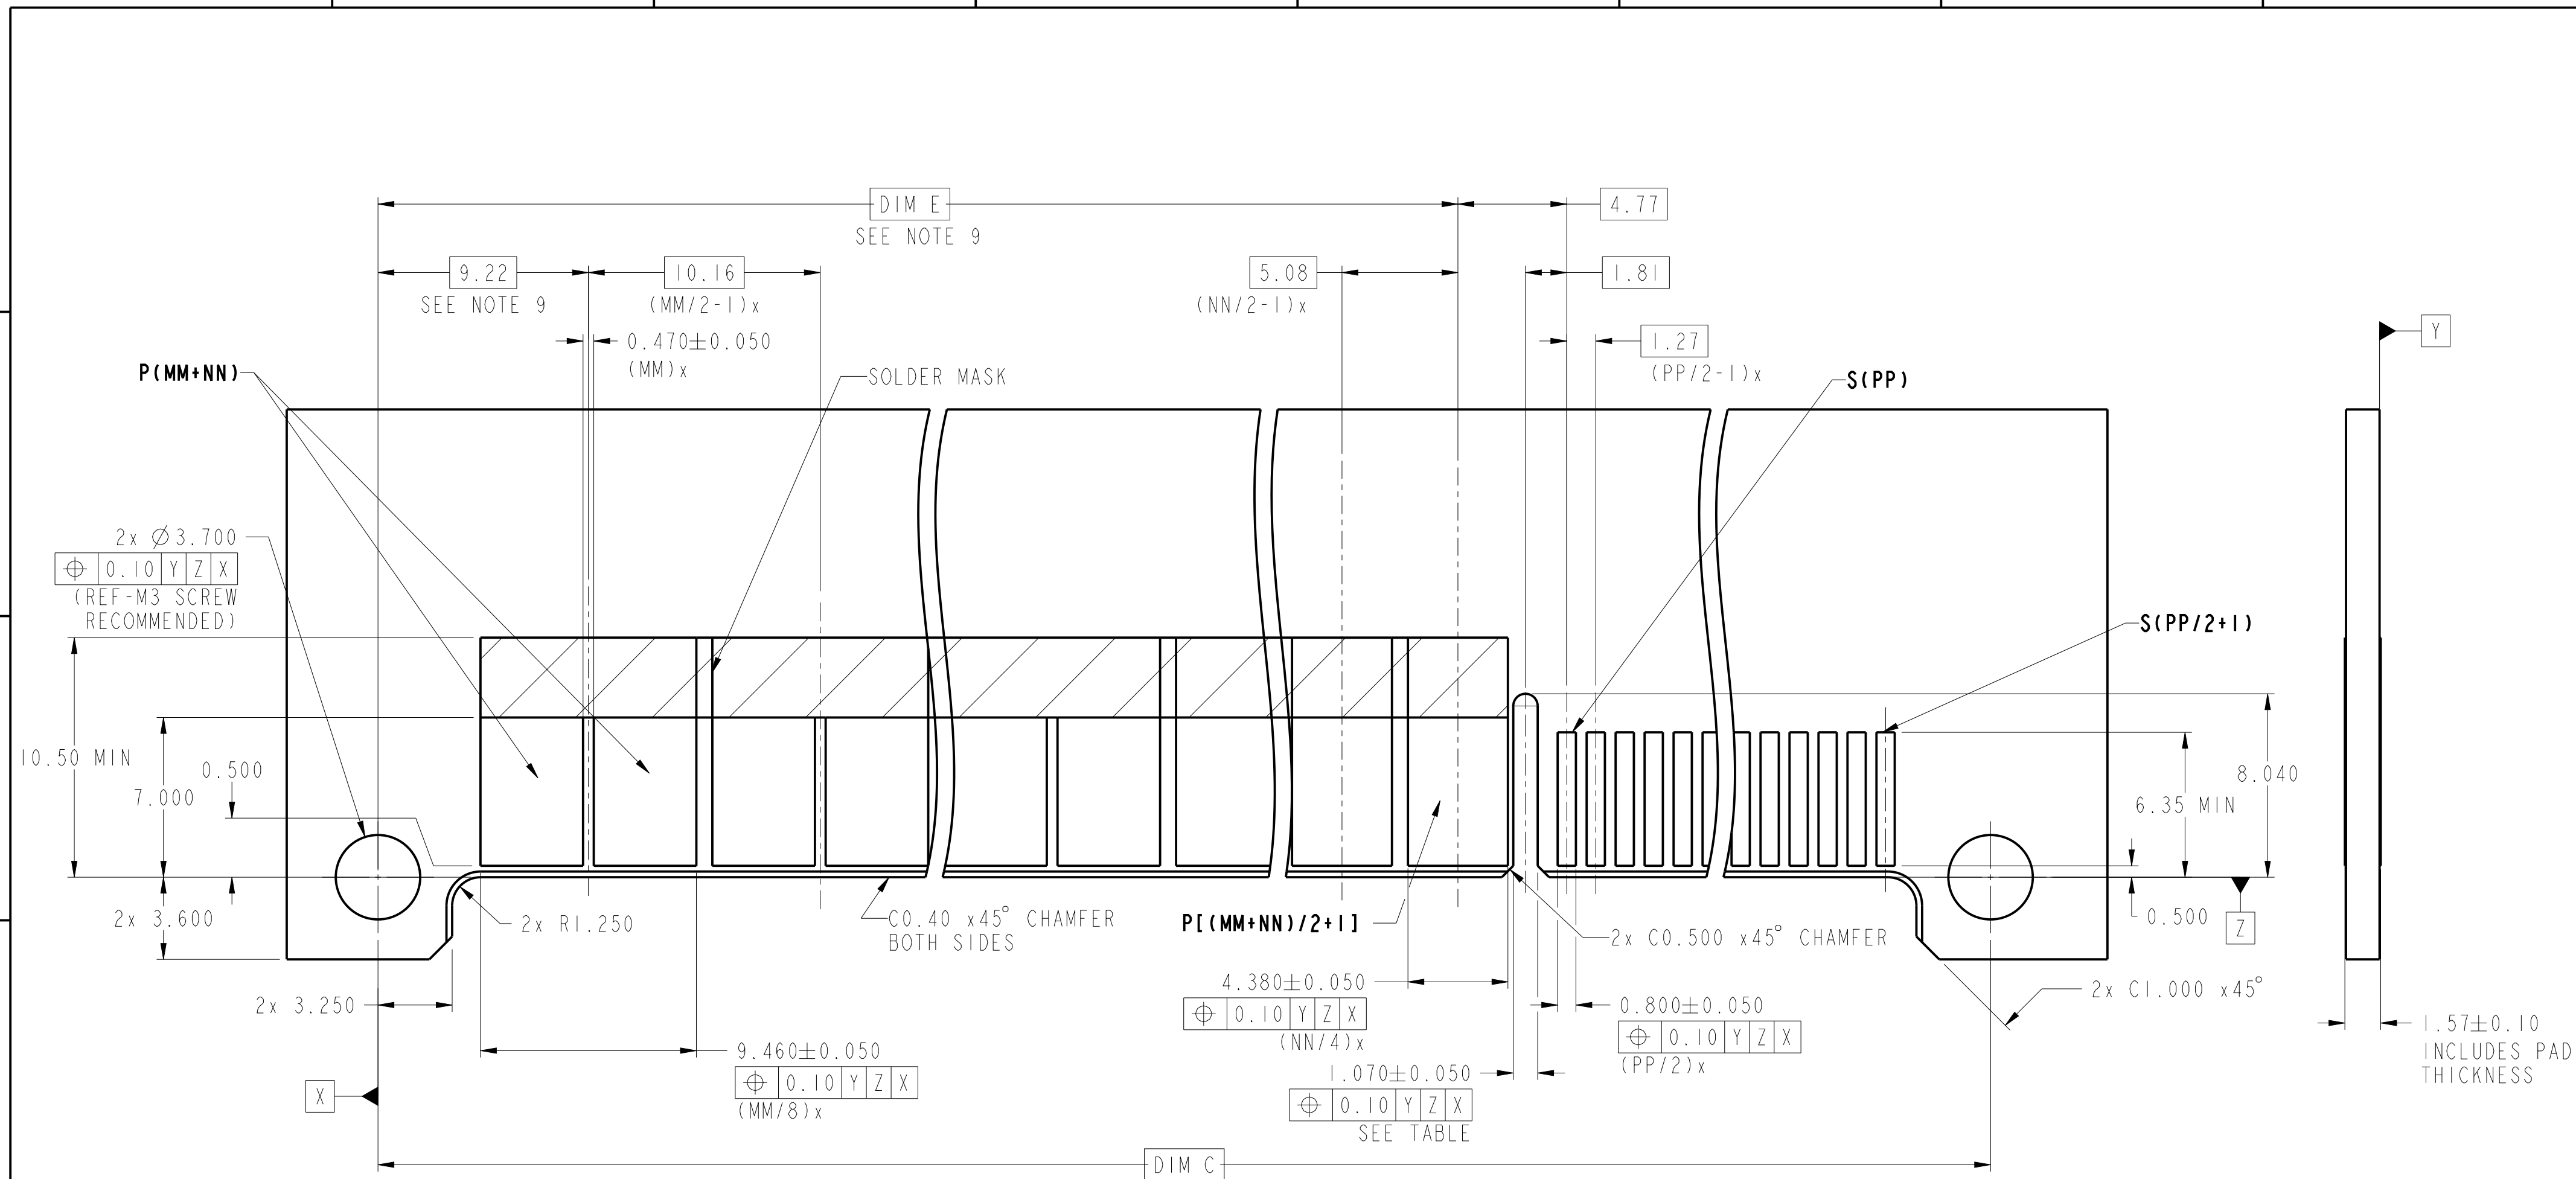

RECOMMENDED HOST BOARD LAYOUT
TOLERANCE ± 0.05

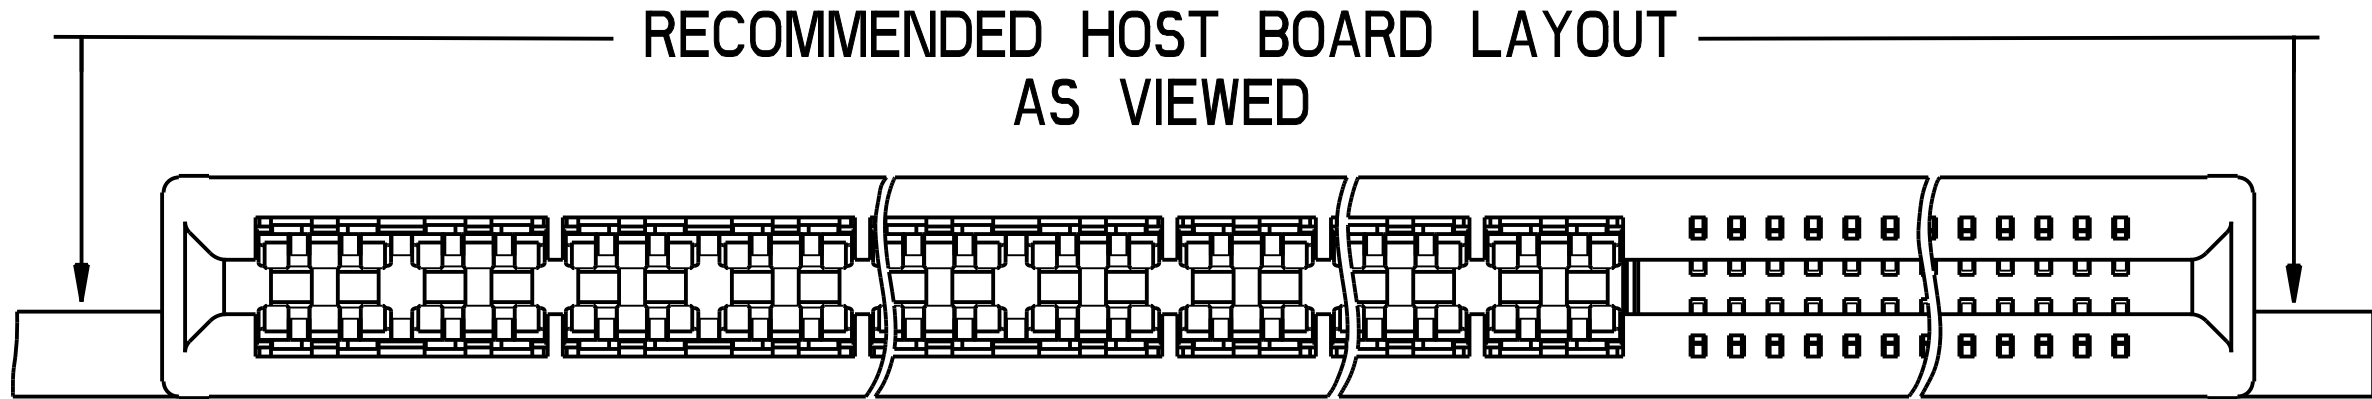


spec ref	-	dr	Andy Lu	2015-12-24	projection	MM	size	A2	scale	2:1
tolerance std	ISO 406 ISO 1101	eng	Andy Lu	2018-03-07	chr	Fancy Zhang	2018-03-07	ecn no	-	-
surface	ISO 1302	appr	PM Zheng	2018-03-07	product family	-	rel level	In Work	-	-
linear	0.X ± 0.5 0.XX ± 0.25 0.XXX ± 0.13	Amphenol FCi	eHPCE STRADDLE MOUNT (UP+MP+S) - UNIVERSAL DRAWING	cat. no.	-	Product - Customer Drw	sheet 2 of 5	rev	5	-

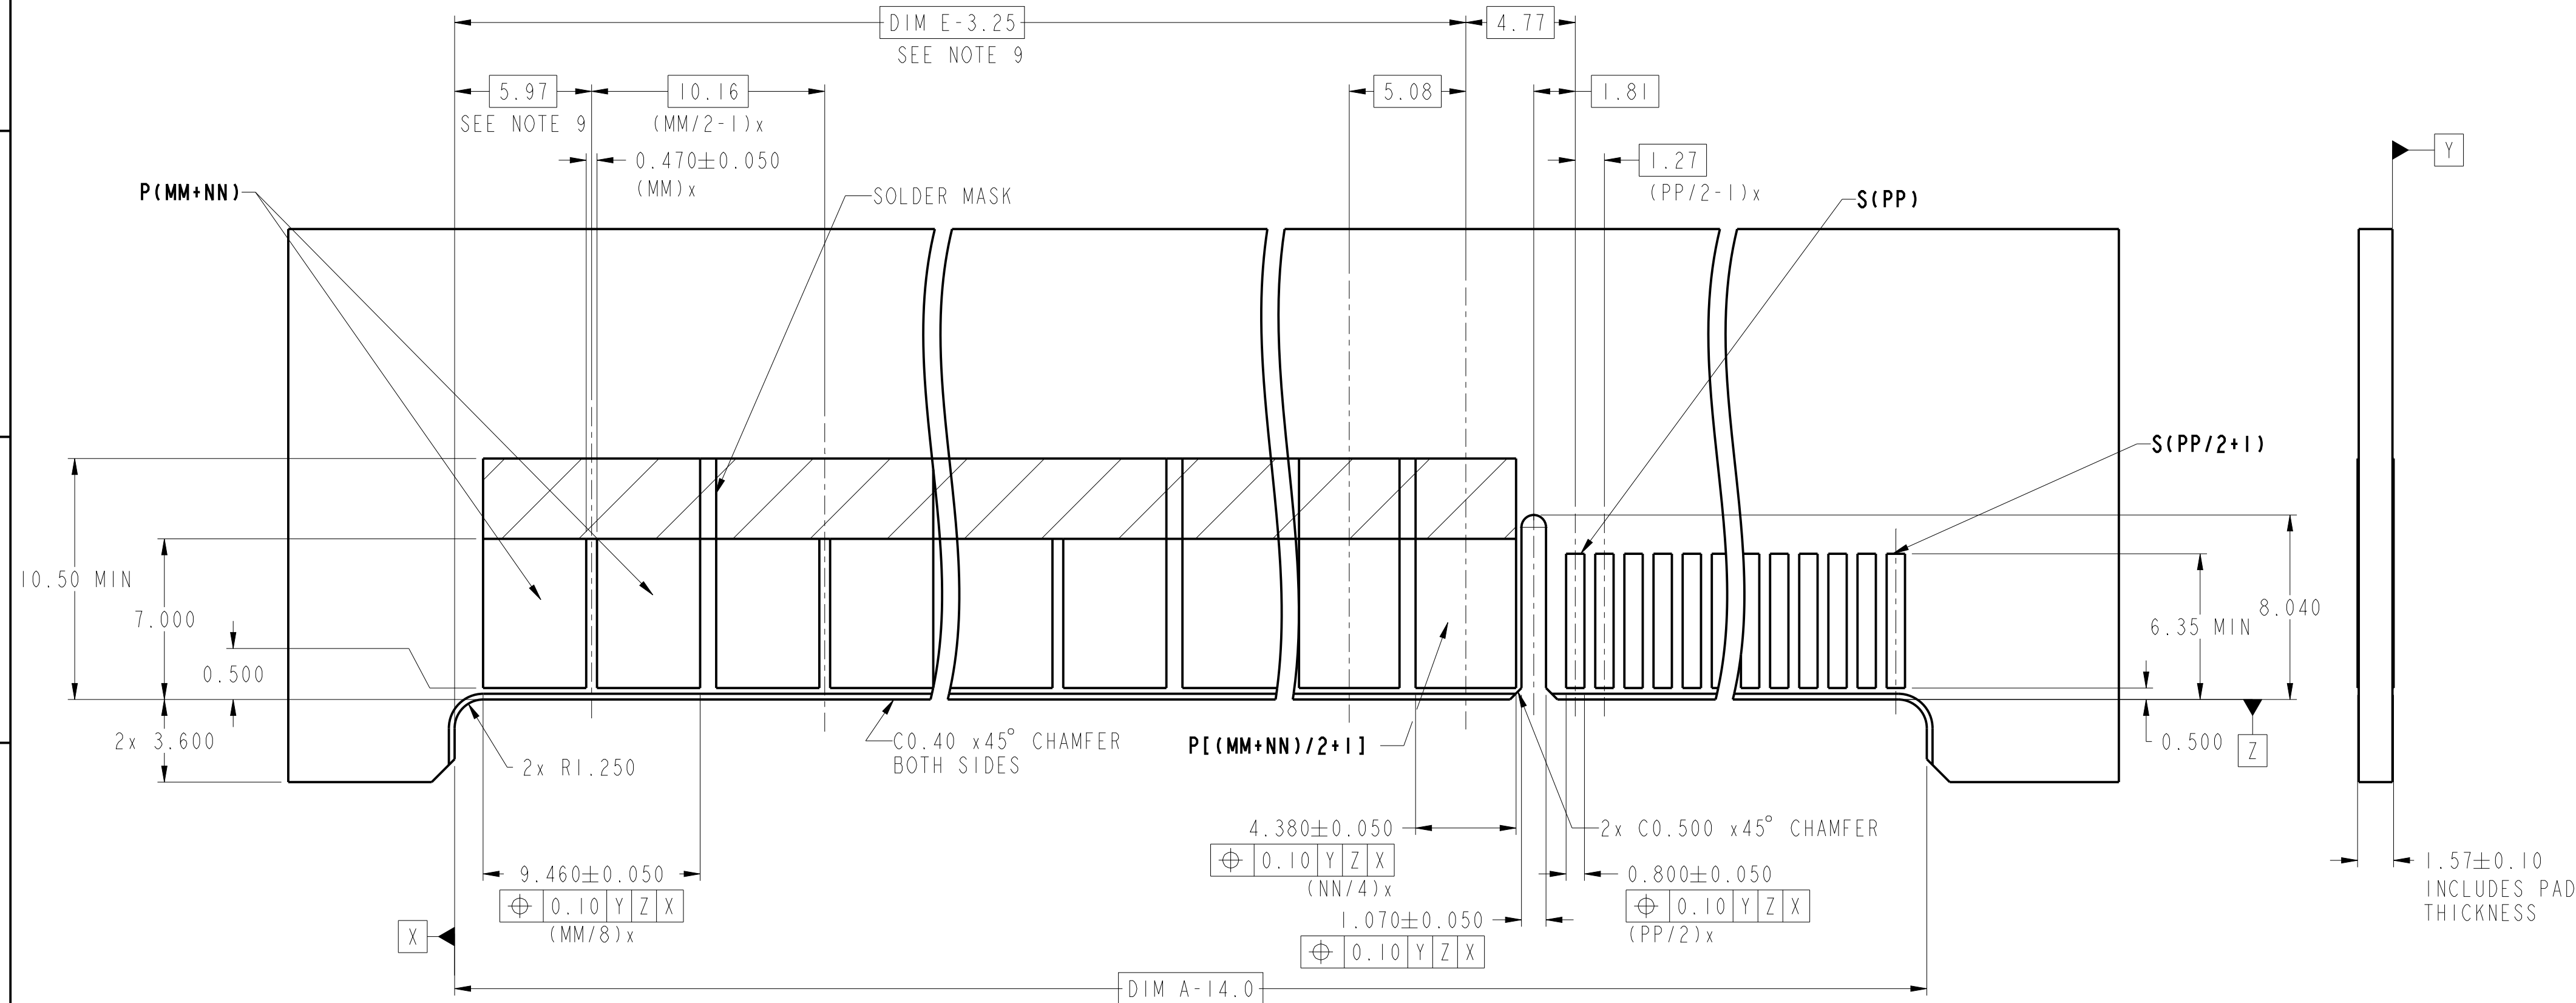


RECOMMENDED HOST BOARD LAYOUT
TOLERANCE ± 0.05
(FOR W/O MOUNTING EARS)

RECOMMENDED HOST BOARD LAYOUT
AS VIEWED

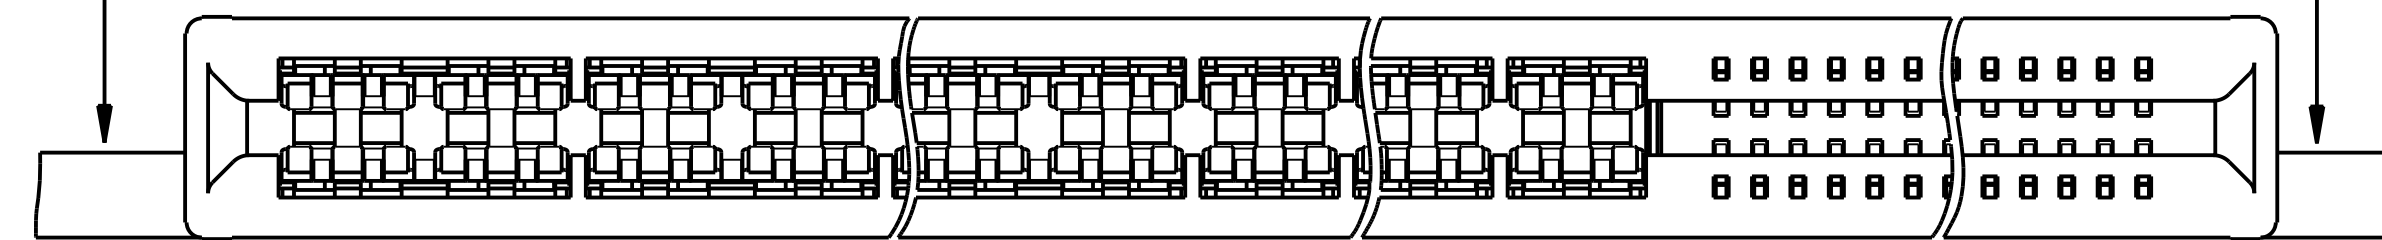

spec ref				-		dr		Andy Lu		2015-12-24		projection		MM		size		A2		scale		2:1							
tolerance std				ISO 406 ISO 1101		eng		Andy Lu		2018-03-07						ecn no		-											
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		Fancy Zhang		2018-03-07		appr		PM Zheng						2018-03-07		product family		-		rel level		In Work					
surface				-		linear		0.X		±0.5		Amphenol FCI		eHPCE STRADDLE MOUNT (UP+MP+S) - UNIVERSAL DRAWING		dwg no		10137755		rev		5							
ISO 1302		0.XX		±0.25		0.XXX		±0.13		cat. no.														-		Product - Customer Drw		sheet 3 of 5	
angular		0°		±2°																									

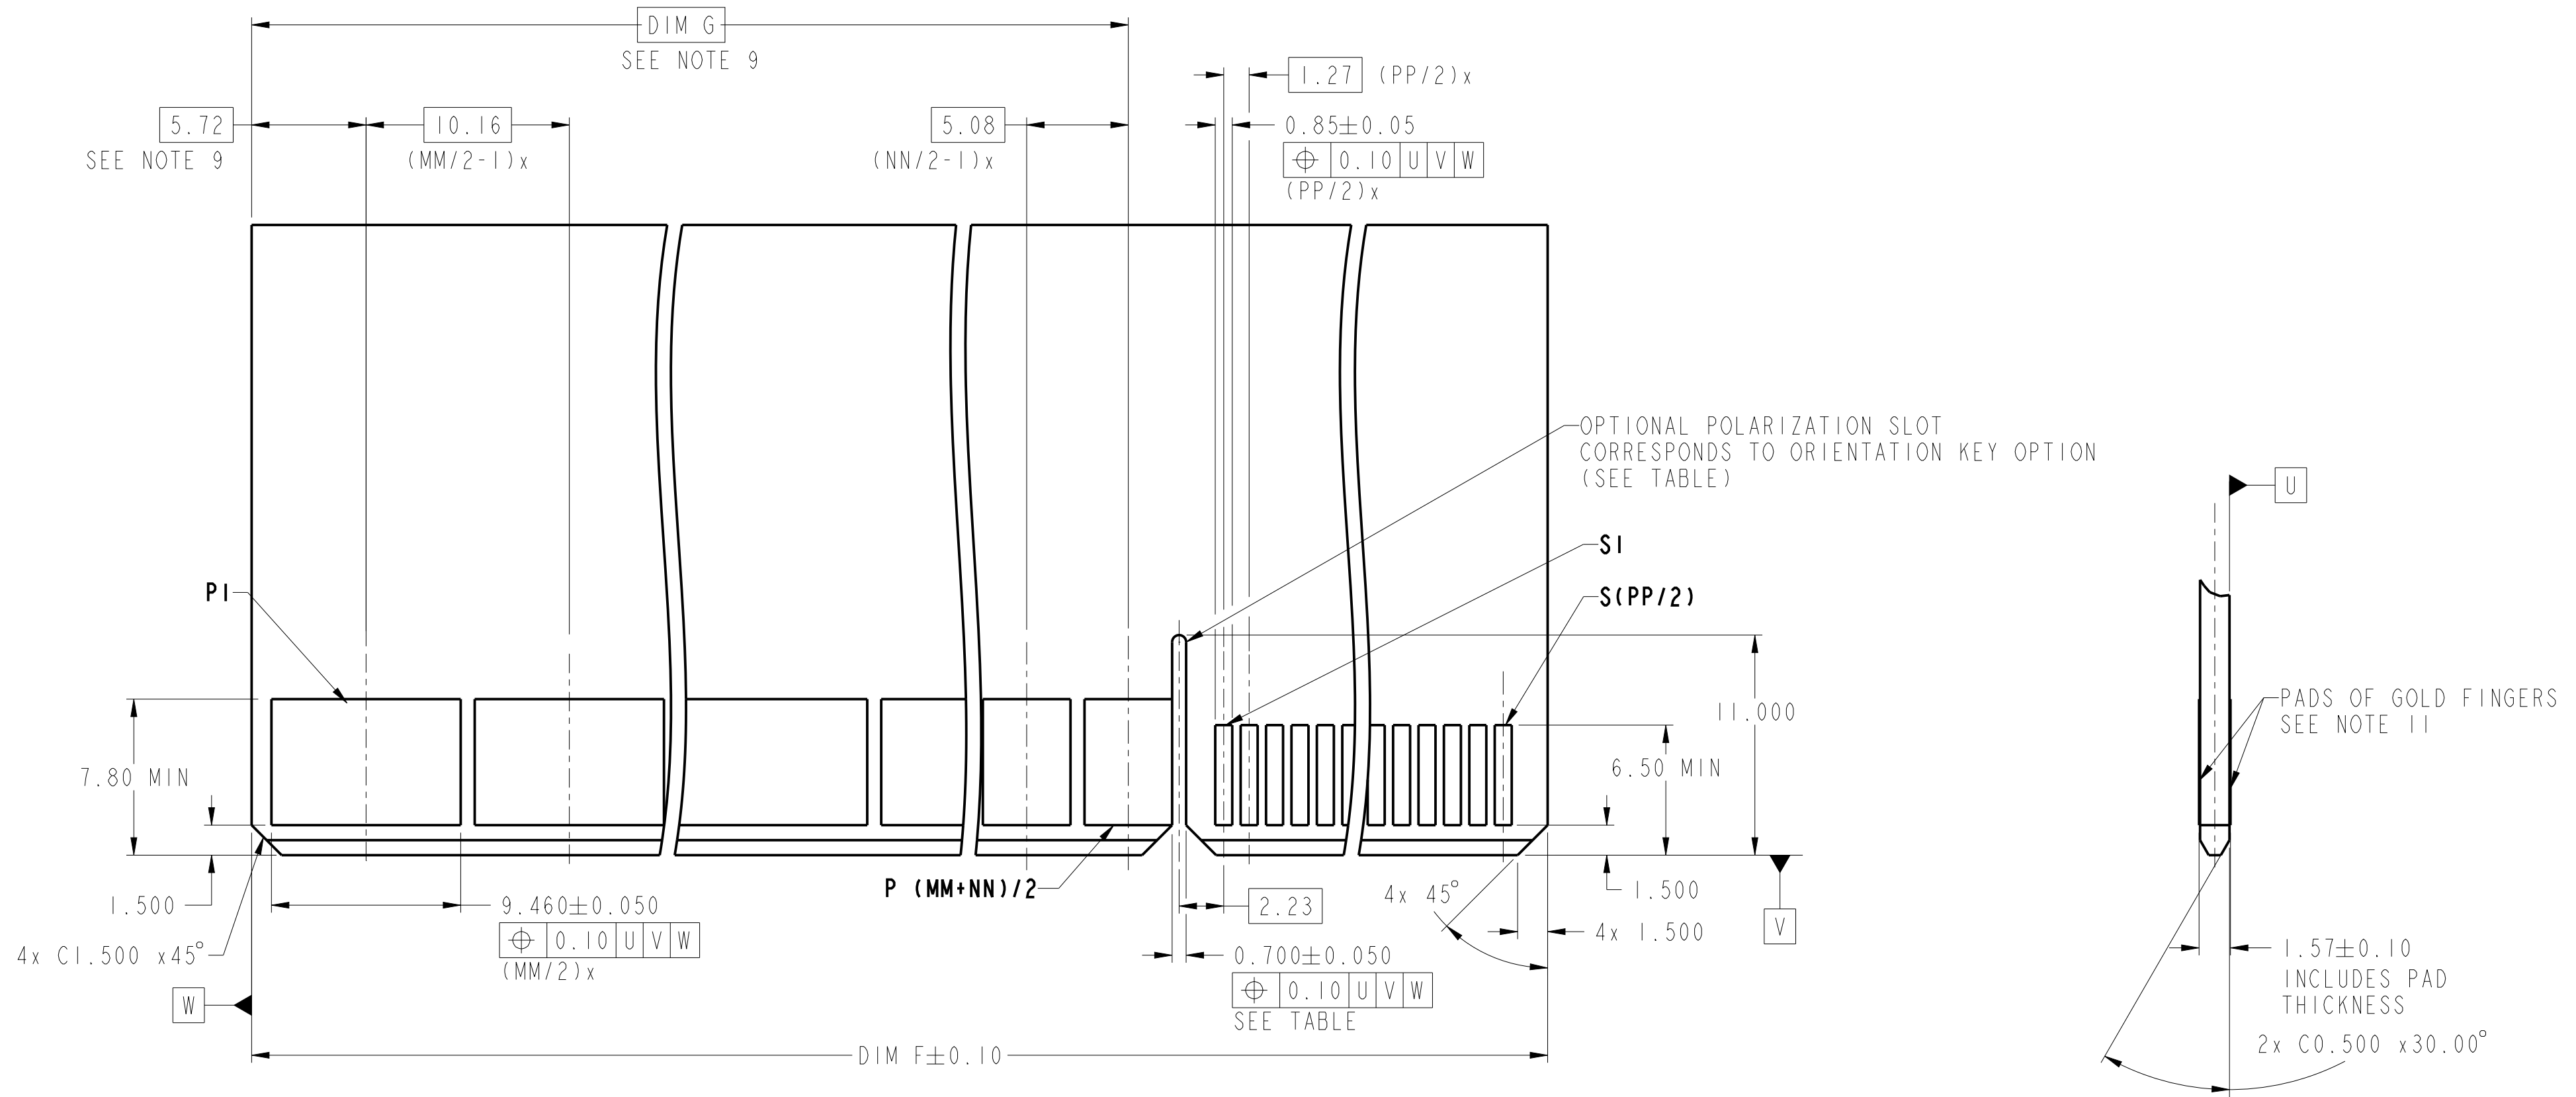

RECOMMENDED MATING BOARD LAYOUT
TOLERANCE ± 0.05

spec ref		-		dr		Andy Lu		2015-12-24		projection		MM		size		A2		scale		1:1	
tolerance std		ISO 406		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Andy Lu		2018-03-07						ecn no		-		-	
ISO 1101		chr				Fancy Zhang		2018-03-07		rel level						-		In Work			
				appr		PM Zheng		2018-03-07		product family		-									
surface		linear		0.X		±0.5		Amphenol FCI		title		eHPCE STRADDLE MOUNT		dwg no		10137755		rev		5	
				0.XX		±0.25															
				0.XXX		±0.13															
		angular		0°		±2°															
ISO 1302																					

A

B

C

D

E

F

A

B

C

D

E

F

10137755

MM

NN

PP

LF

LEAD FREE

MOUNTING EARS

POLARIZATION KEY


REAR GUIDE

	A	B	C	D	E	F	G	H
MOUNTING EARS	Y	Y	Y	N	N	N	Y	N
POLARIZATION KEY	Y	N	N	Y	N	N	Y	Y
REAR GUIDE	Y	Y	N	Y	Y	N	N	N

ULTRA PWR CONTACT QTY
(NEXT TO LEFT END)

MIDDLE PWR CONTACT QTY
(NEXT TO SIGNAL)

SIGNAL CONTACT QTY

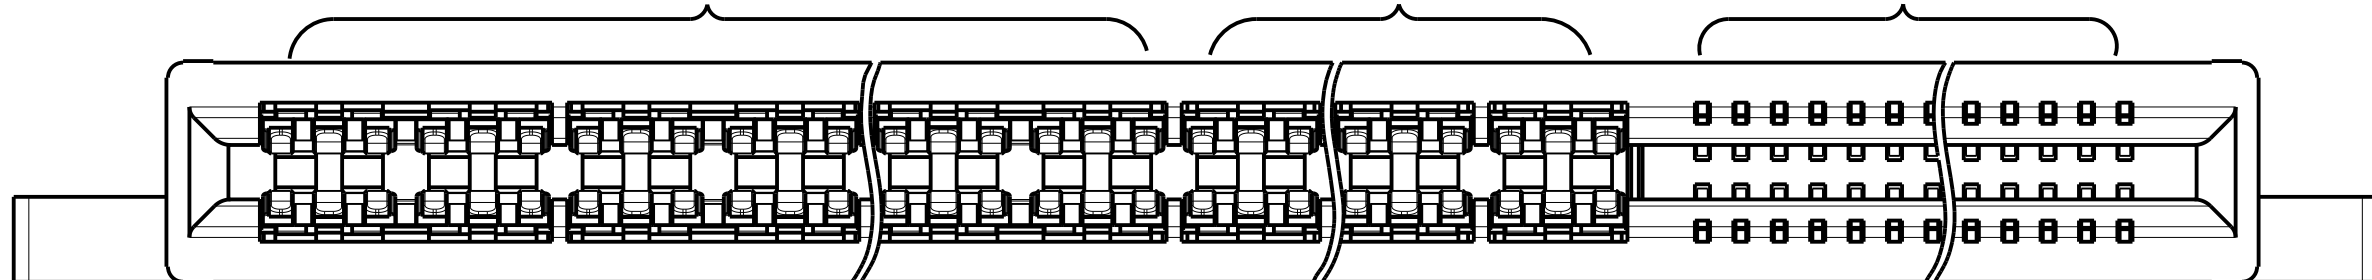

Example: The configuration above is 10137755-060624ALF
STRADDLE MOUNT WITH ENHANCED WALLS 6UP6MP24S WITH MOUNTING EARS,
POLARIZATION KEY AND ALIGNMENT KEY.

6UP means 6 pcs ultra power contacts with 6 beams; 24S means 24 pcs signal contacts;
6MP means 6 pcs middle power contacts with 3 beams.

TABLE: PART NUMBER CODE FOR eHPCE STRADDLE MOUNT WITH ENHANCED WALL UP+MP+S CONFIG

NOTES:

1. CONNECTOR MATERIALS:

HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK, LOW HALOGEN, UL 94V-0
CONTACTS: HIGH PERFORMANCE COPPER ALLOY.

2. CONTACT FINISH REF. SECTION 5.2 IN PRODUCT SPECIFICATION.

3. PRODUCT SPECIFICATION: GS-12-1362.

4. APPLICATION SPECIFICATION: GS-20-0469.

5. PRODUCT MARKING (PART NUMBER & DATE CODE) ON HOUSING IN AREA SHOWN.

6. PACKAGING MEETS SPECIFICATION GS-14-2532(POCKET TRAY).

7. HOUSING COMPONENT WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
FOR 10 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.


8. MAXIMUM OVERALL LENGTH IS 100mm.

9. DIM IS NOT APPLICABLE IF THERE ISN'T 3 BEAMS CONTACT.


10. THIS PRODUCT MEETS EUROPEAN UNION DERECTIVES AND OTHER COUNTRY REGULATIONS
AS DESCRIBED IN GS-47-0004.

11. PLATING OF PADS SHALL BE 30u" GOLD MINIMUM OVER 50u" NICKEL MINIMUM.
SURFACE MUST BE FREE OF FOREIGN MATTER.

POLARIZATION KEY

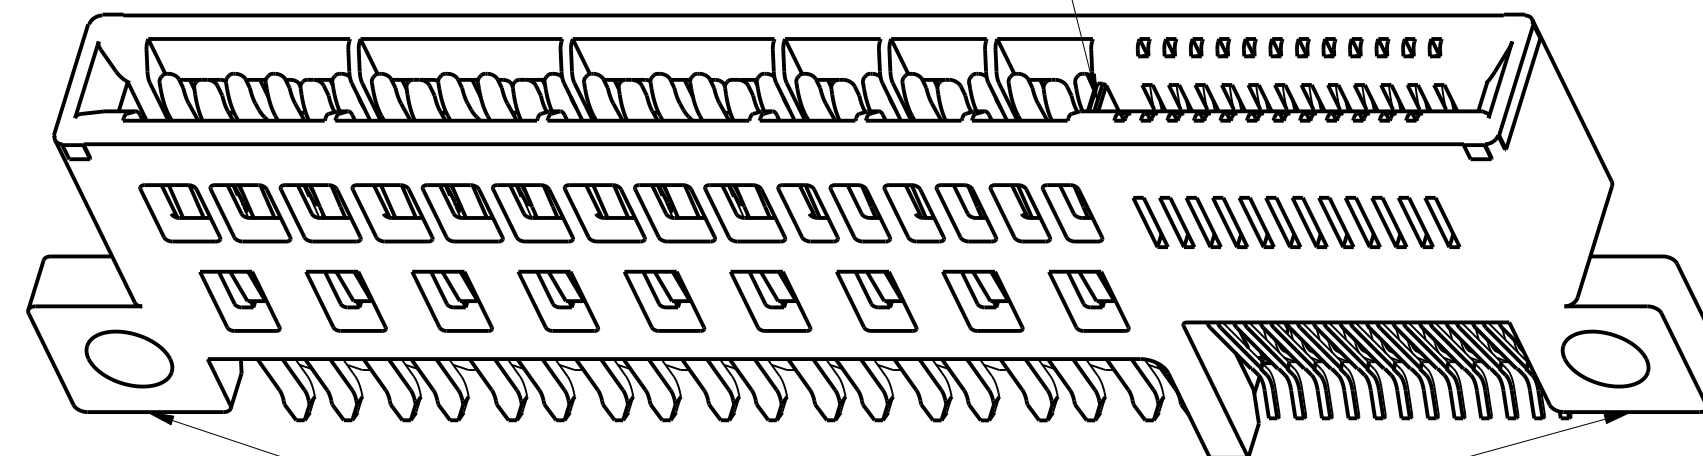

MOUNTING EARS

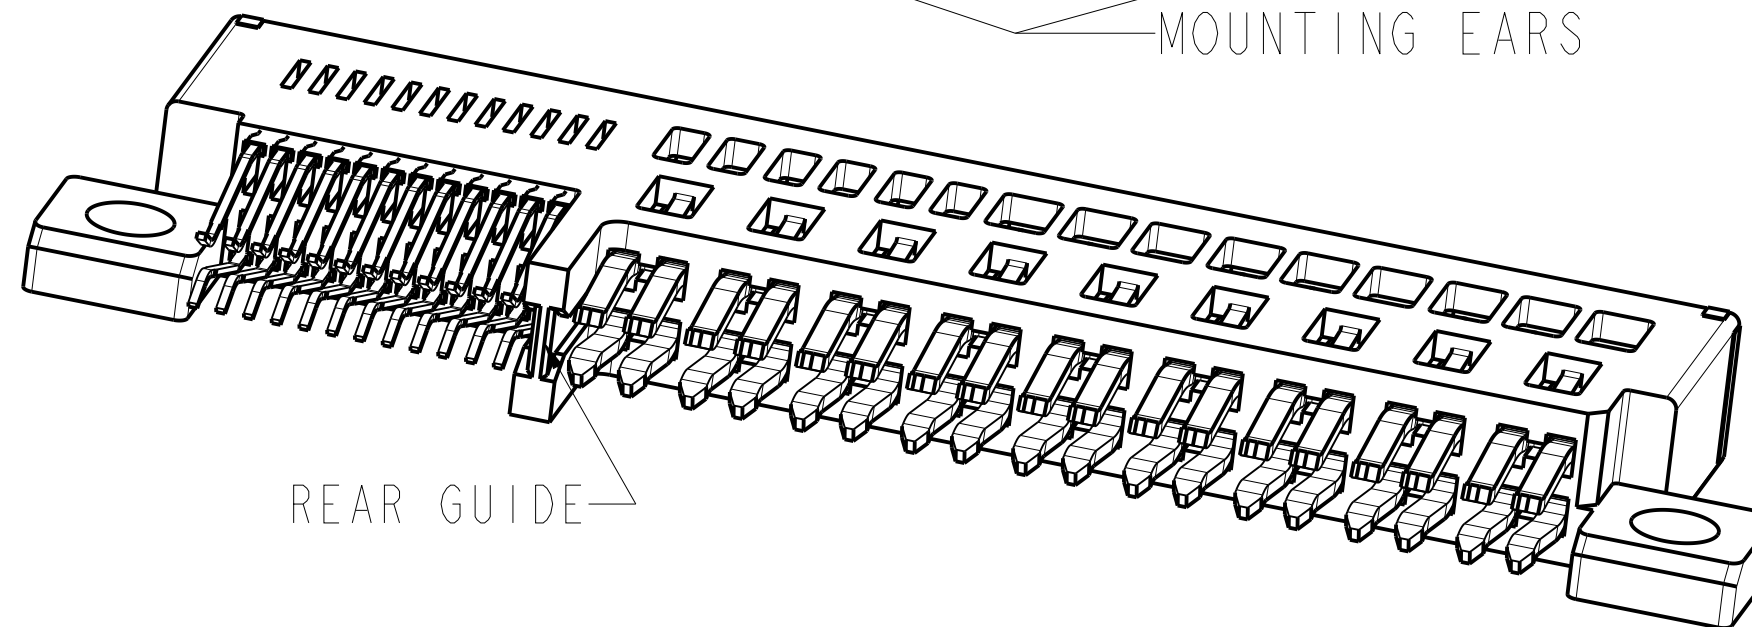

REAR GUIDE

DIM	TABLE 2. LENGTH FORMULAS
DIM A ⑧	$(MM/2)*10.16 + (NN/2) \times 5.08 + (PP/2) \times 1.27 + 17.20$
DIM B	DIM A - 13.08
DIM C	DIM A - 7.50
DIM D	DIM A - 8.98
DIM E ⑨	$(MM/2 - 1) \times 10.16 + (NN/2 - 1) \times 5.08 + 16.84$ (WITH UP CONTACT) $(NN/2 - 1) \times 5.08 + 6.68$ (WITHOUT UP CONTACT)
DIM F	DIM A - 13.38
DIM G ⑨	$(MM/2 - 1) \times 10.16 + (NN/2 - 1) \times 5.08 + 13.34$ (WITH UP CONTACT) $(NN/2 - 1) \times 5.08 + 3.18$ (WITHOUT UP CONTACT)

spec ref		-		dr		Andy Lu		2015-12-24		projection				MM		size		A2		scale		4:1					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Andy Lu		2018-03-07						CARD EDGE		ecn no		rel level		In Work							
ISO 406 ISO 1101				chr		Fancy Zhang		2018-03-07								cat. no.								-		Product - Customer Drw	
surface				linear		Amphenol FCI		title		eHPCE STRADDLE MOUNT (UP+MP+S) - UNIVERSAL DRAWING		dwg no		10137755		rev		5									
ISO 1302				angular																				0°		±2°	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru