

## Sensor/Actuator cable - SAC-4P-3,0-600/M12FR-3L FB - 1404020

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 4-position, PP-EPDM halogen-free, Gray RAL 7035, Free cable end, on Socket angled M12, A-coded, with 3 LEDs, Cable length: 3 m, Hygienic design, with plastic knurl



### Key commercial data

|                        |                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit           | 0                                                                                                       |
| Minimum order quantity | 1                                                                                                       |
| GTIN                   | <br>4 046356 677653 |
| Custom tariff number   | 85444290                                                                                                |
| Country of origin      | POLAND                                                                                                  |

### Technical data

#### General data

|                                 |                                                       |
|---------------------------------|-------------------------------------------------------|
| Rated current at 40°C           | 4 A                                                   |
| Rated voltage                   | 24 V                                                  |
| Number of positions             | 4                                                     |
| Volume resistance               | ≤ 5 mΩ                                                |
| Insulation resistance           | ≥ 100 MΩ                                              |
| Length of cable                 | 3 m                                                   |
| Ambient temperature (operation) | -40 °C ... 105 °C (Male connector / female connector) |

#### General characteristics

|                             |                                       |
|-----------------------------|---------------------------------------|
| Standards/regulations       | M12 plug-in connector IEC 61076-2-101 |
| Coding                      | A - standard                          |
| Surge voltage category      | II                                    |
| Pollution degree            | 3                                     |
| Degree of protection        | IP65/IP68/IP69K                       |
| Insertion/withdrawal cycles | ≥ 100                                 |
| Torque                      | 0.4 Nm (M12 plug-in connector)        |
| Contact material            | CuSn                                  |
| Contact surface material    | Ni/Au                                 |
| Contact carrier material    | PP                                    |

# Sensor/Actuator cable - SAC-4P-3,0-600/M12FR-3L FB - 1404020

## Technical data

### General characteristics

|                       |        |
|-----------------------|--------|
| Material of grip body | PP     |
| Material, knurls      | PP     |
| Sealing material      | FKM    |
| Status display        | 3 LEDs |

### Conductor data

|                                               |                                               |
|-----------------------------------------------|-----------------------------------------------|
| Cable type                                    | Halogen-free PP gray                          |
| Cable type (abbreviation)                     | 600                                           |
| Cable abbreviation                            | Li9Y9Y                                        |
| Conductor cross section                       | 4x 0.34 mm <sup>2</sup> (signal line)         |
| AWG signal line                               | 22                                            |
| Conductor structure signal line               | 42x 0.10 mm                                   |
| Core diameter including insulation            | 1.27 mm ±0.02 mm (signal line)                |
| Thickness, insulation                         | ≥ 0.21 mm (Core insulation)                   |
| Wire colors                                   | brown, white, blue, black                     |
| Overall twist                                 | 4 wires, twisted                              |
| Length of twist, overall twist                | 48 mm                                         |
| External sheath, color                        | Gray RAL 7035                                 |
| Outer sheath thickness                        | Approx. 0.8 mm                                |
| External cable diameter D                     | 4.7 mm ±0.15 mm                               |
| Minimum bending radius, fixed installation    | 5 x D                                         |
| Minimum bending radius, flexible installation | 10 x D                                        |
| Cable weight                                  | 30 kg/km                                      |
| Outer sheath, material                        | PP-EPDM                                       |
| Material conductor insulation                 | PP                                            |
| Conductor material                            | Bare Cu litz wires                            |
| Conductor resistance                          | 58 Ω/km (At an ambient temperature of 20°C)   |
| Nominal voltage, conductor                    | ≤ 300 V AC                                    |
| Test voltage, conductor                       | ≥ 3000 V AC (Spark test)                      |
| Special properties                            | FDA compliant                                 |
| Halogen-free                                  | in accordance with DIN VDE 0472 part 815      |
| Ambient temperature (operation)               | -40 °C ... 105 °C (cable, fixed installation) |

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

### UNSPSC

|              |          |
|--------------|----------|
| UNSPSC 11    | 31251501 |
| UNSPSC 12.01 | 31251501 |

## Sensor/Actuator cable - SAC-4P-3,0-600/M12FR-3L FB - 1404020

### Classifications

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 13.2   | 31251501 |
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |

### Accessories

#### Accessories

#### Tools

Cable-cutting tool - CUTFOX-S VDE - 1212207



Diagonal cutter for copper and aluminum conductors, VDE-tested

Stripping tool - WIREFOX SAC - 1212623



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

Stripping tool - WIREFOX 10 - 1212150




Stripping tool, for cables and conductors from 0.02 - 10 mm², self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm² stranded/1.5 mm² solid, replaceable stripping blade

### Drawings


## Sensor/Actuator cable - SAC-4P-3,0-600/M12FR-3L FB - 1404020

Schematic diagram




Pin assignment M12 socket, 4-pos., A-coded, view female side

Cable cross section



Halogen-free PP gray [600]


Circuit diagram

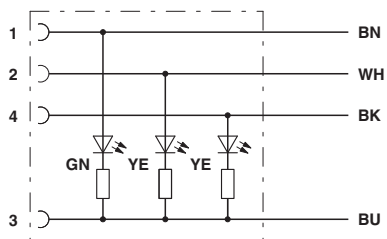

Contact assignment of the M12 plug and the M12 socket

## Sensor/Actuator cable - SAC-4P-3,0-600/M12FR-3L FB - 1404020

Dimensioned drawing

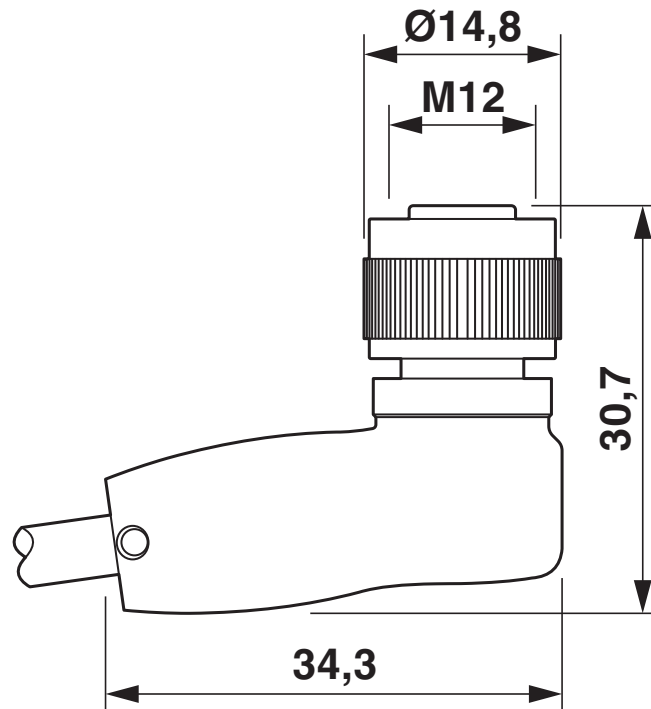

Socket M12 x 1, angled, with LED



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)