

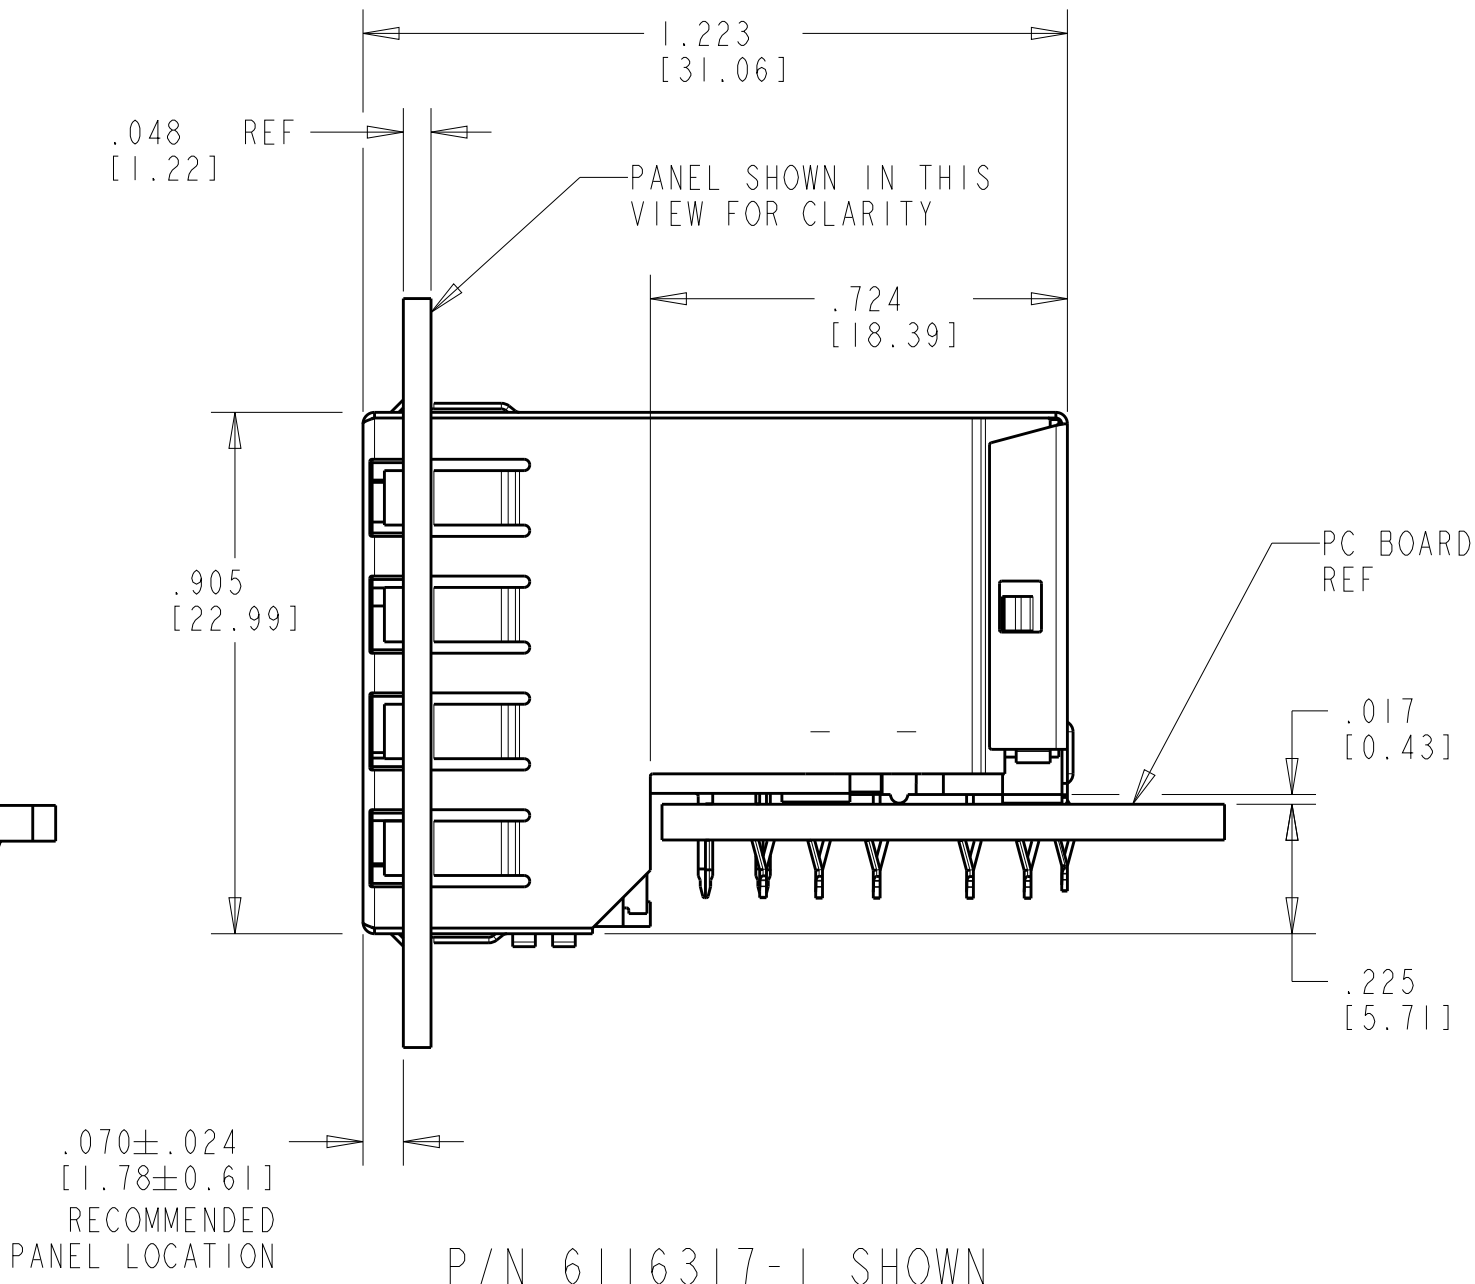
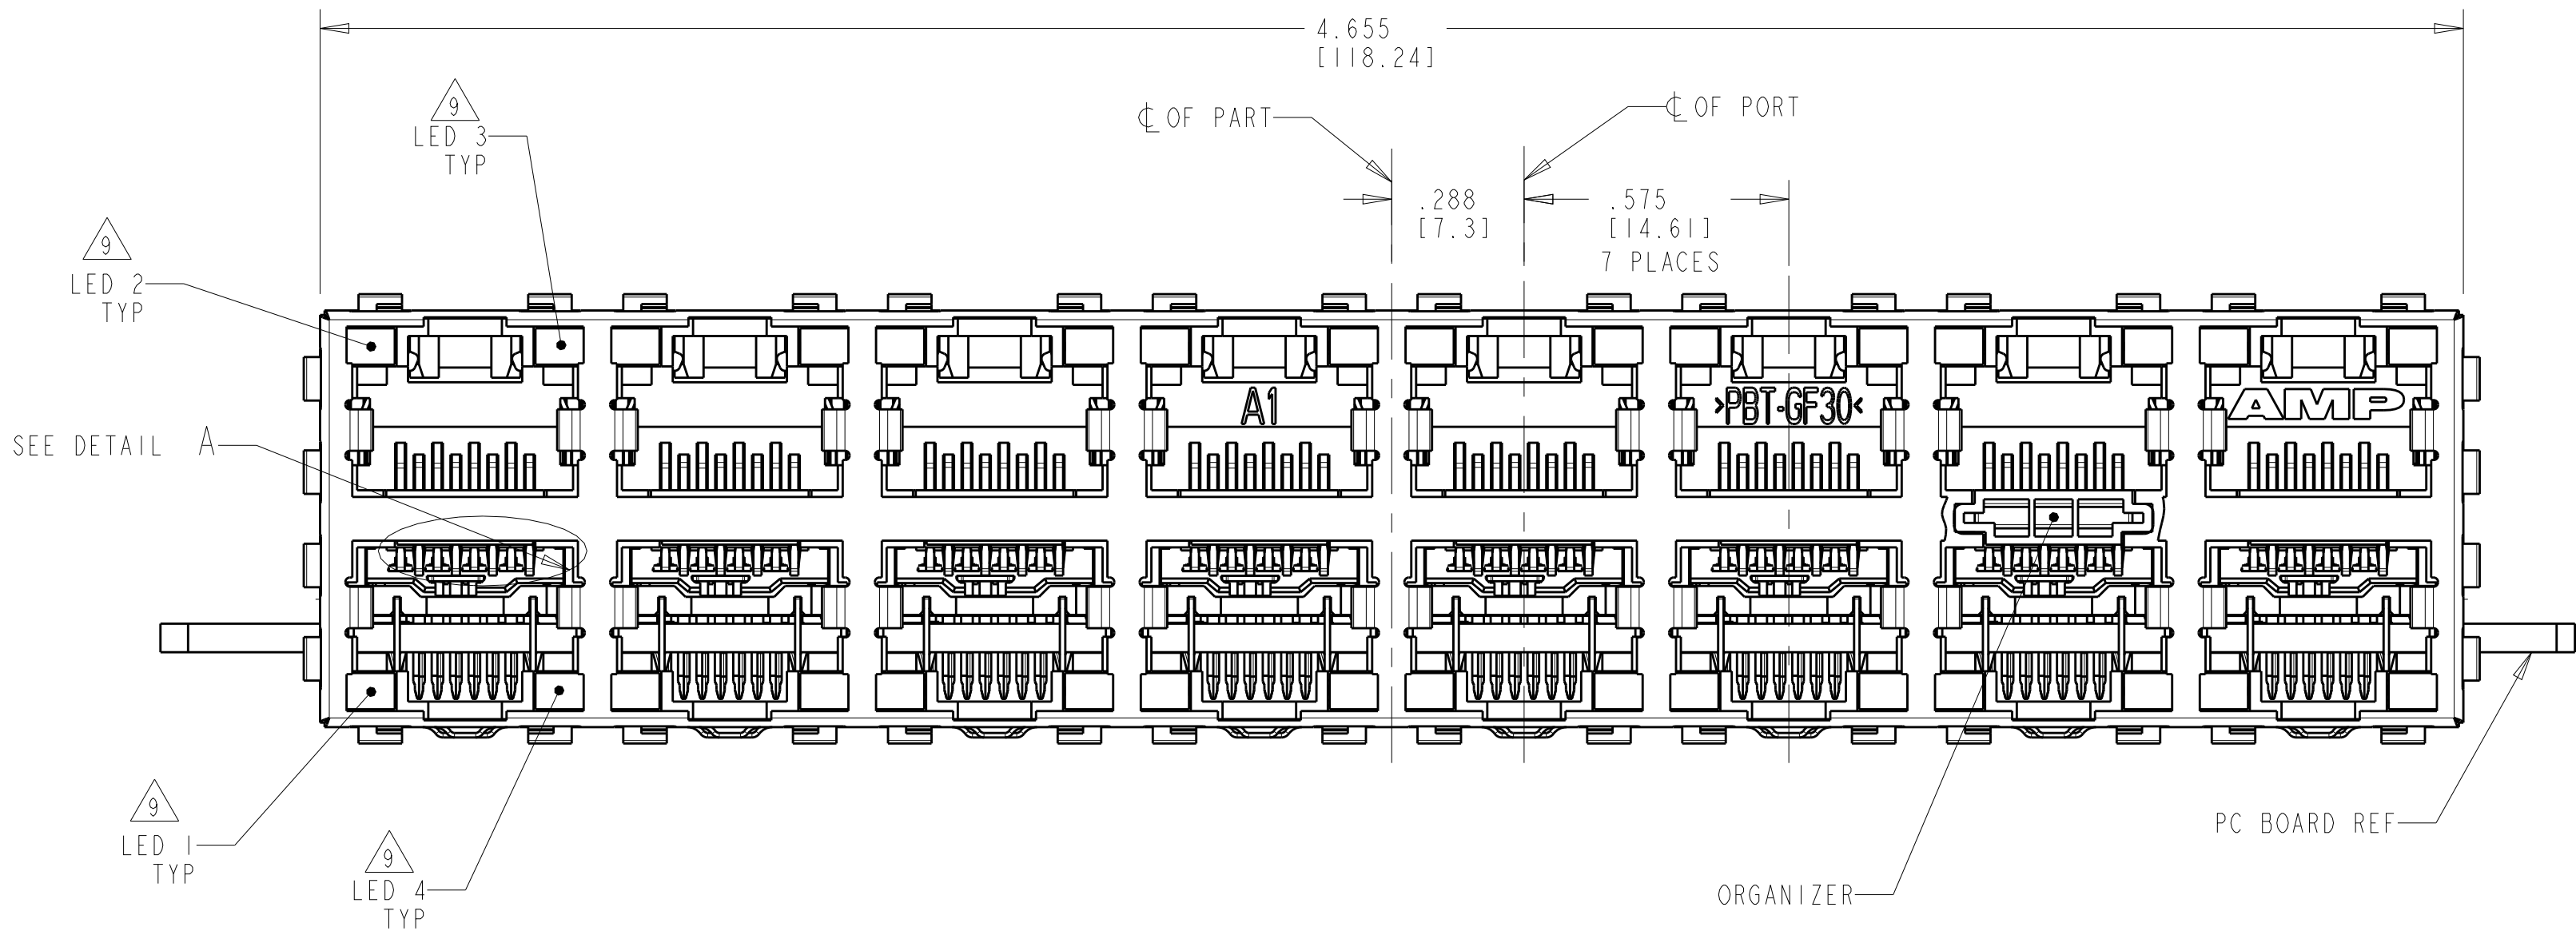
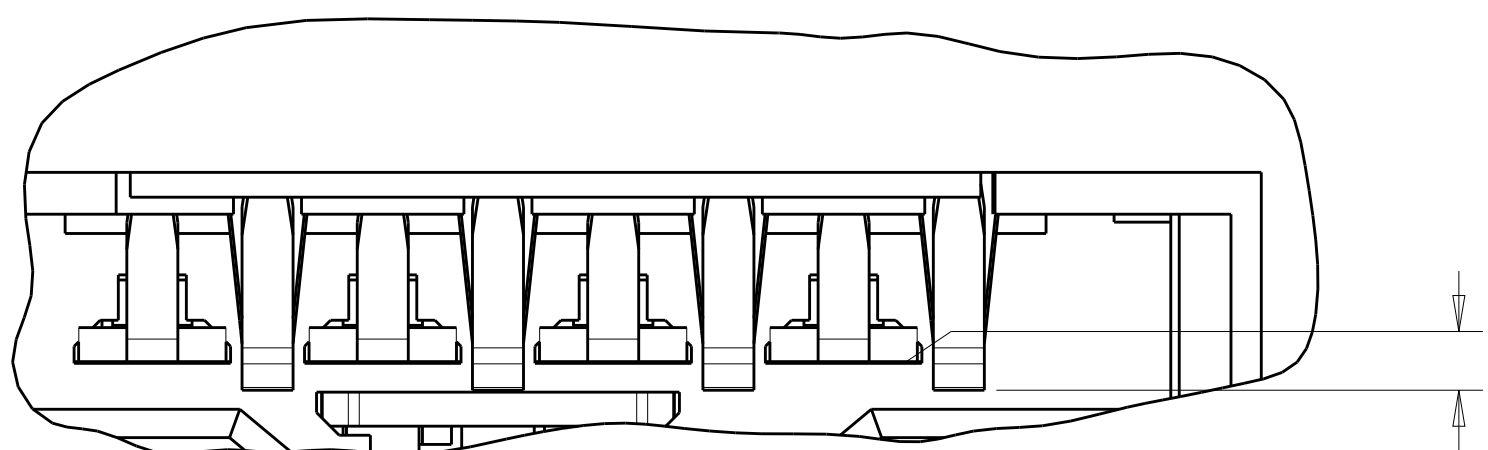
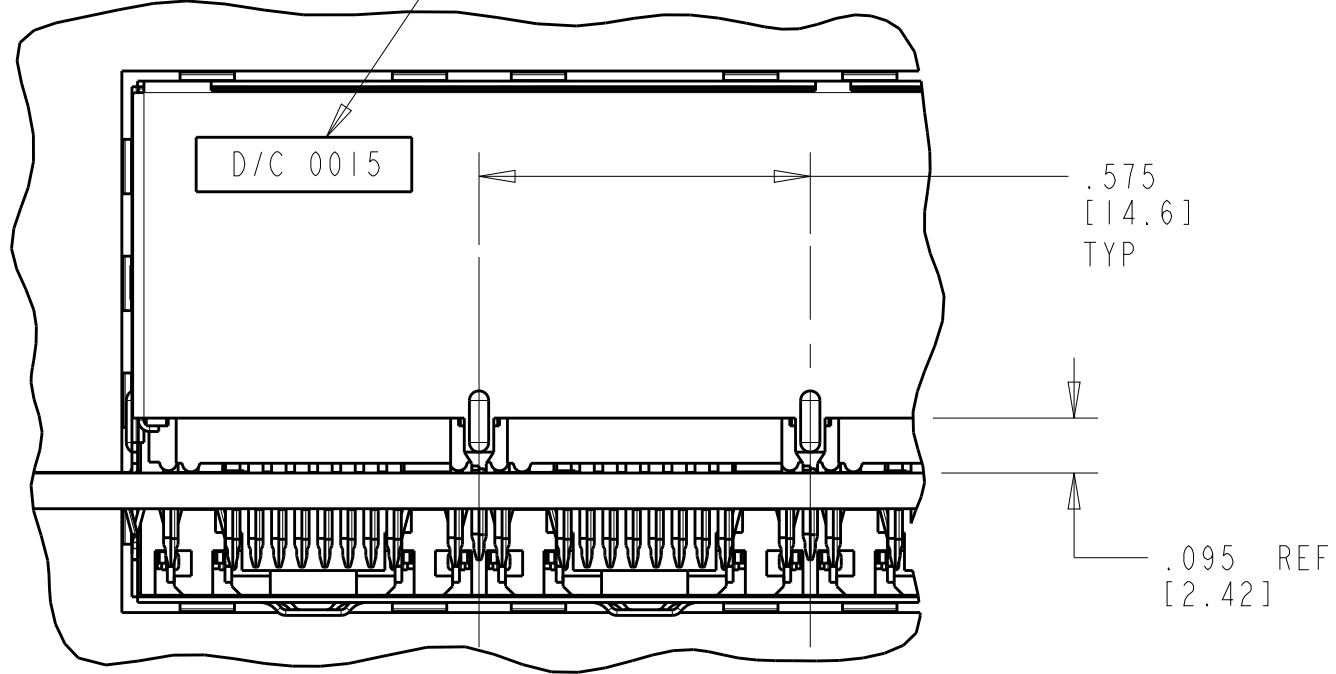
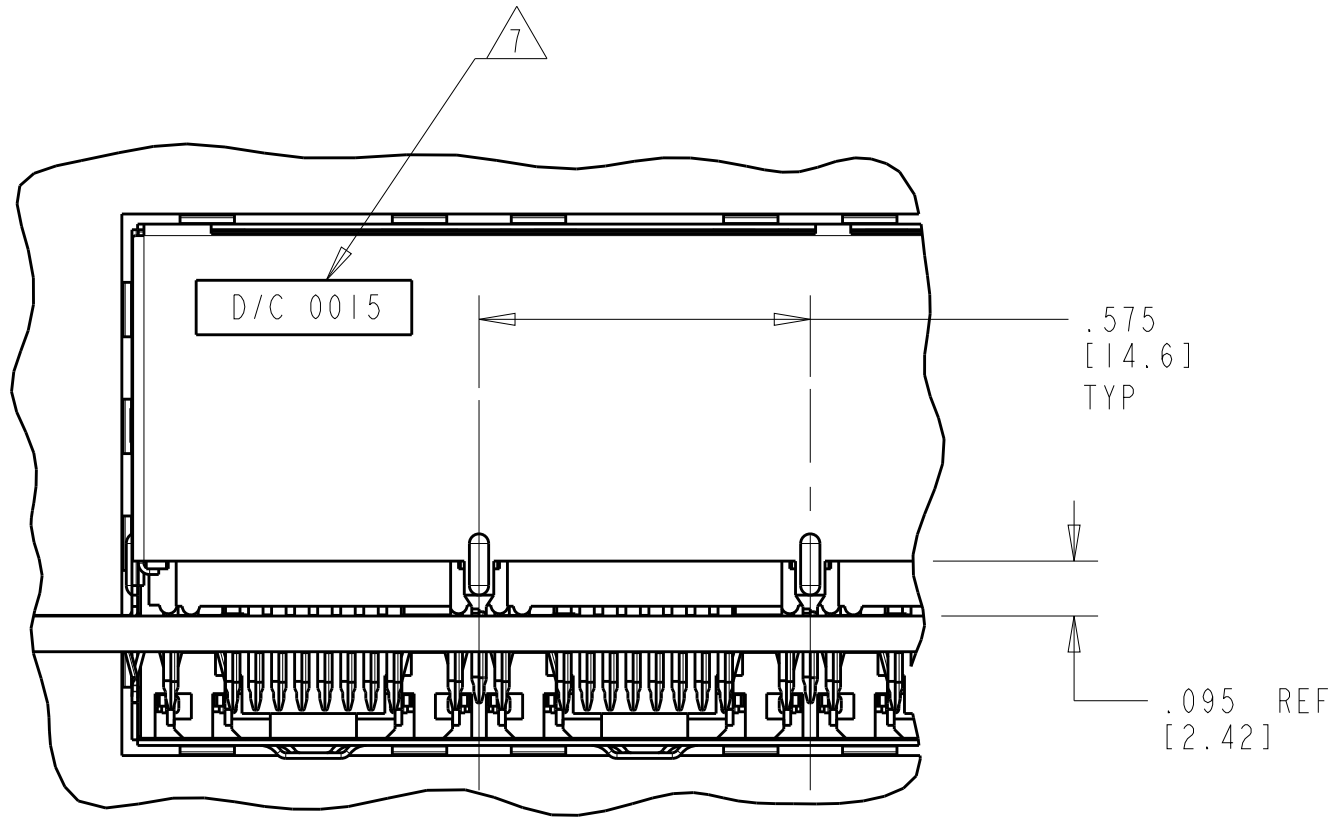


LOC	DIST	REVISIONS					
AA	22	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C2	REVISED PER ECO-11-005033	04MAY11	RK	HMR
			D	ECO-15-006810	22JAN2016	LL	SH

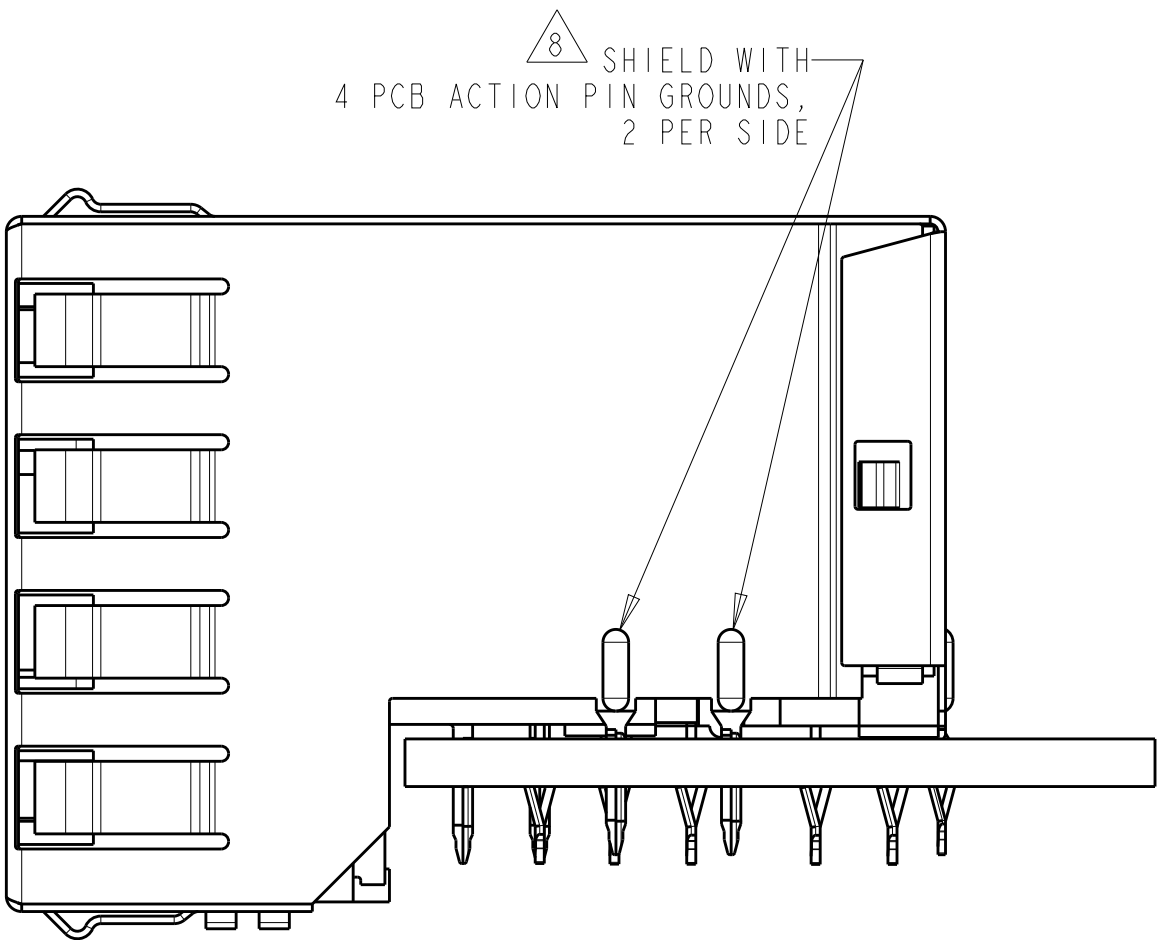


- △ HOUSING: PBT POLYESTER, BLACK, UL 94V-0.
TERMINALS: .030 THICK PHOS BRONZE PLATED WITH 1.27µm MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 2µm MINIMUM THICK MATTE TIN IN ACTION PIN COMPLIANT PIN TERMINAL AREA OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE.
SHIELD: .025 THICK COPPER ALLOY PLATED WITH 2.03µm MINIMUM BRIGHT TIN OVER 1.27µm MINIMUM NICKEL.
GROUND CLIPS: .025 THICK COPPER ALLOY PLATED WITH 2.03µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.
LIGHT EMITTING DIODE (LED): DIFFUSED EPOXY LENS, 12.95 CARBON STEEL WIREFRAME LEADS PLATED WITH 8.89µm TIN/COPPER OVER 2.03µm SILVER OVER 1.02µm COPPER OVER 3.56µm NICKEL OVER 1.02µm COPPER UNDERPLATE.
LED ACTION PIN COMPLIANT PIN CONTACTS: .030 THICK BRASS PLATED WITH 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
 - ALL DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
 - TWO LEDS PER PORT, SIZE .079 X .118, SEE TABLE.
 - DRILLED HOLE DIA = .040±.001.
COPPER THICKNESS = .001-.003.
TIN THICKNESS = .0003 MIN.
 - DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
 - DATE CODE LOCATED ON REAR OF PART APPROXIMATELY AS SHOWN.
 - THESE FOUR SIDE PCB ACTION PIN GROUNDS AND CORRESPONDING PCB HOLES ARE REQUIRED ONLY ON 6116317-2, 6116317-3, 6116317-5, 6116317-6, 6116317-7, -9 AND 1--0.
 - SUGGESTED OPERATING CURRENT FOR LEDS IS 20 mA.

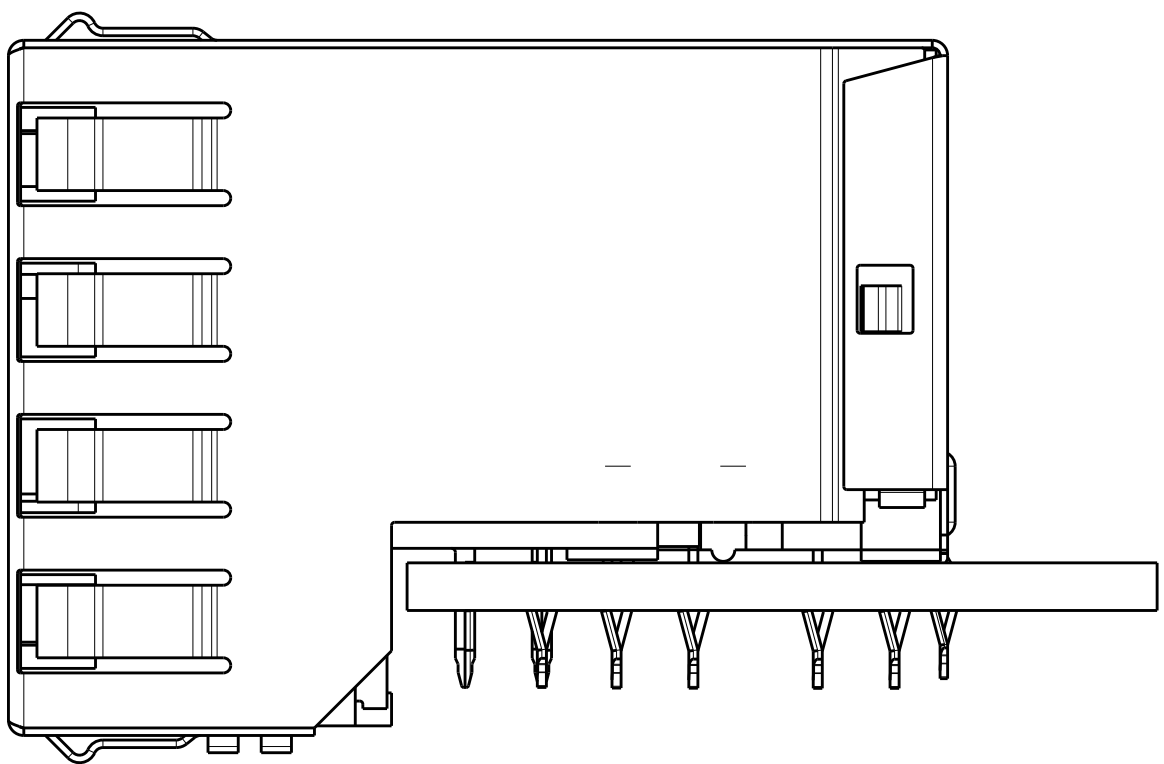

RED/GREEN	RED/GREEN	RED/GREEN	RED/GREEN	1-6116317-0
GREEN/YELLOW	GREEN/YELLOW	RED/GREEN	RED/GREEN	6116317-9
GREEN/YELLOW	GREEN/YELLOW	RED/GREEN	RED/GREEN	6116317-8
GREEN	GREEN	YELLOW	YELLOW	6116317-7
YELLOW	YELLOW	GREEN	GREEN	6116317-6
GREEN/YELLOW	GREEN/YELLOW	GREEN/YELLOW	GREEN/YELLOW	6116317-5
GREEN	GREEN	GREEN	GREEN	6116317-4
GREEN	GREEN	GREEN	GREEN	6116317-3
GREEN	GREEN	GREEN	GREEN	6116317-2
GREEN	GREEN	GREEN	GREEN	6116317-1
LED #4 (LOWER-RIGHT)	LED #3 (UPPER-RIGHT)	LED #2 (UPPER-LEFT)	LED #1 (LOWER-LEFT)	PART NO.

8	4	△ 8	1-6116317-0
8	4	△ 8	6116317-9
NONE	NONE		6116317-8
NONE	4	△ 8	6116317-7
NONE	4	△ 8	6116317-6
NONE	4	△ 8	6116317-5
8	NONE		6116317-4
8	4	△ 8	6116317-3
NONE	4	△ 8	6116317-2
NONE	NONE		6116317-1
GROUND CLIPS	SIDE PCB ACTION PIN GNDS		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA 23JUN2005	TE Connectivity	
DIMENSIONS: INCHES[mm]		CHK J. WESTMAN 23JUN2005	NAME STACKED MODULAR JACK ASSEMBLY, 2X8 WITH LEDS, 8 POSITION, SHIELDED PANEL GROUND, OFFSET, CAT 5	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. FLICKINGER 23JUN2005	SIZE A1	
0 PLC ±.005 [0.13]		PRODUCT SPEC 108-1854	CAGE CODE DRAWING NO 00779	
1 PLC ±.005 [0.13]		APPLICATION SPEC 114-2160	RESTRICTED TO	
2 PLC ±.005 [0.13]		WEIGHT 1 = 77.2 grams	REV D	
3 PLC ±.005 [0.13]		CUSTOMER DRAWING	SCALE 3:1 SHEET 1 OF 3	

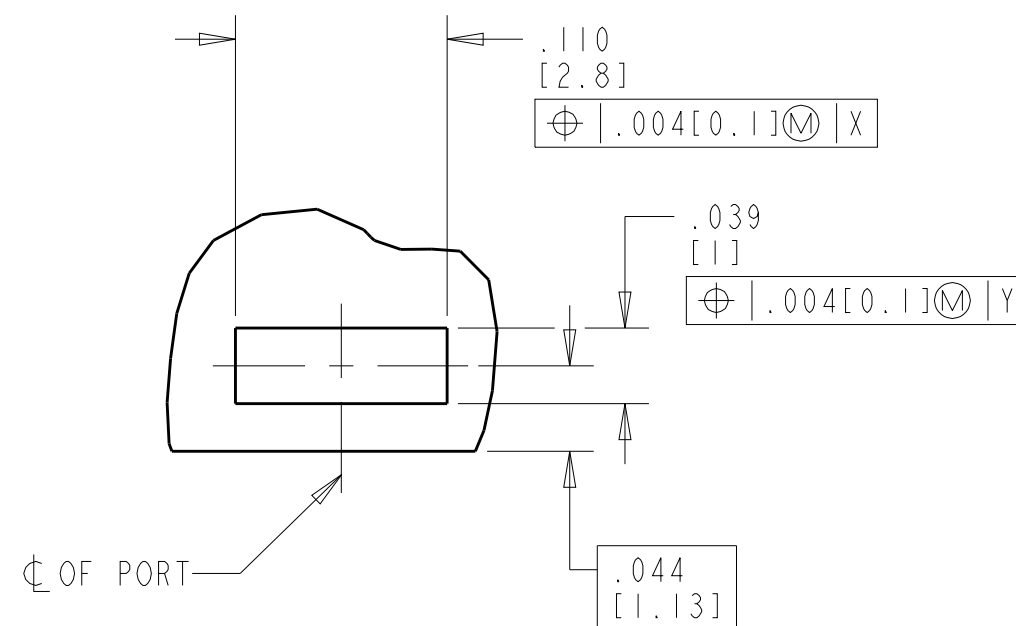



DETAIL B
THESE PLATED PADS REQUIRED FOR 6116317-3 & -4
PRODUCTS WITH GROUNDING CLIPS
SCALE 10:1
8 PLACES



SEE DETAIL B
FOR -3 & -4

THIS DRAWING IS A CONTROLLED DOCUMENT.						OWN VARELA		23JUN2005		 TE Connectivity	
						CHK WESTMAN		23JUN2005			
DIMENSIONS: INCHES[mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:				APRD FLICKINGER		23JUN2005		NAME	
		Ø PLG ± .005 [0.13]				PRODUCT SPEC		STACKED MODULAR JACK ASSEMBLY, 2X8 WITH LEADS, 8 POSITION, SHIELDED PANEL GROUND, OFFSET, CAT 5			
		PLC ± .005 [0.13]				108-1854					
		PLC ± .005 [0.13]				APPLICATION SPEC					
		ANGLES ±				114-2160					
MATERIAL		FINISH		WEIGHT	77.2 grams	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
-		-				A1	00779	C=6116317		-	
CUSTOMER DRAWING						SCALE		3:1	SHEET	2	OF 3
										REV	D

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AA	22	-	-	SEE SHEET 1	-	-

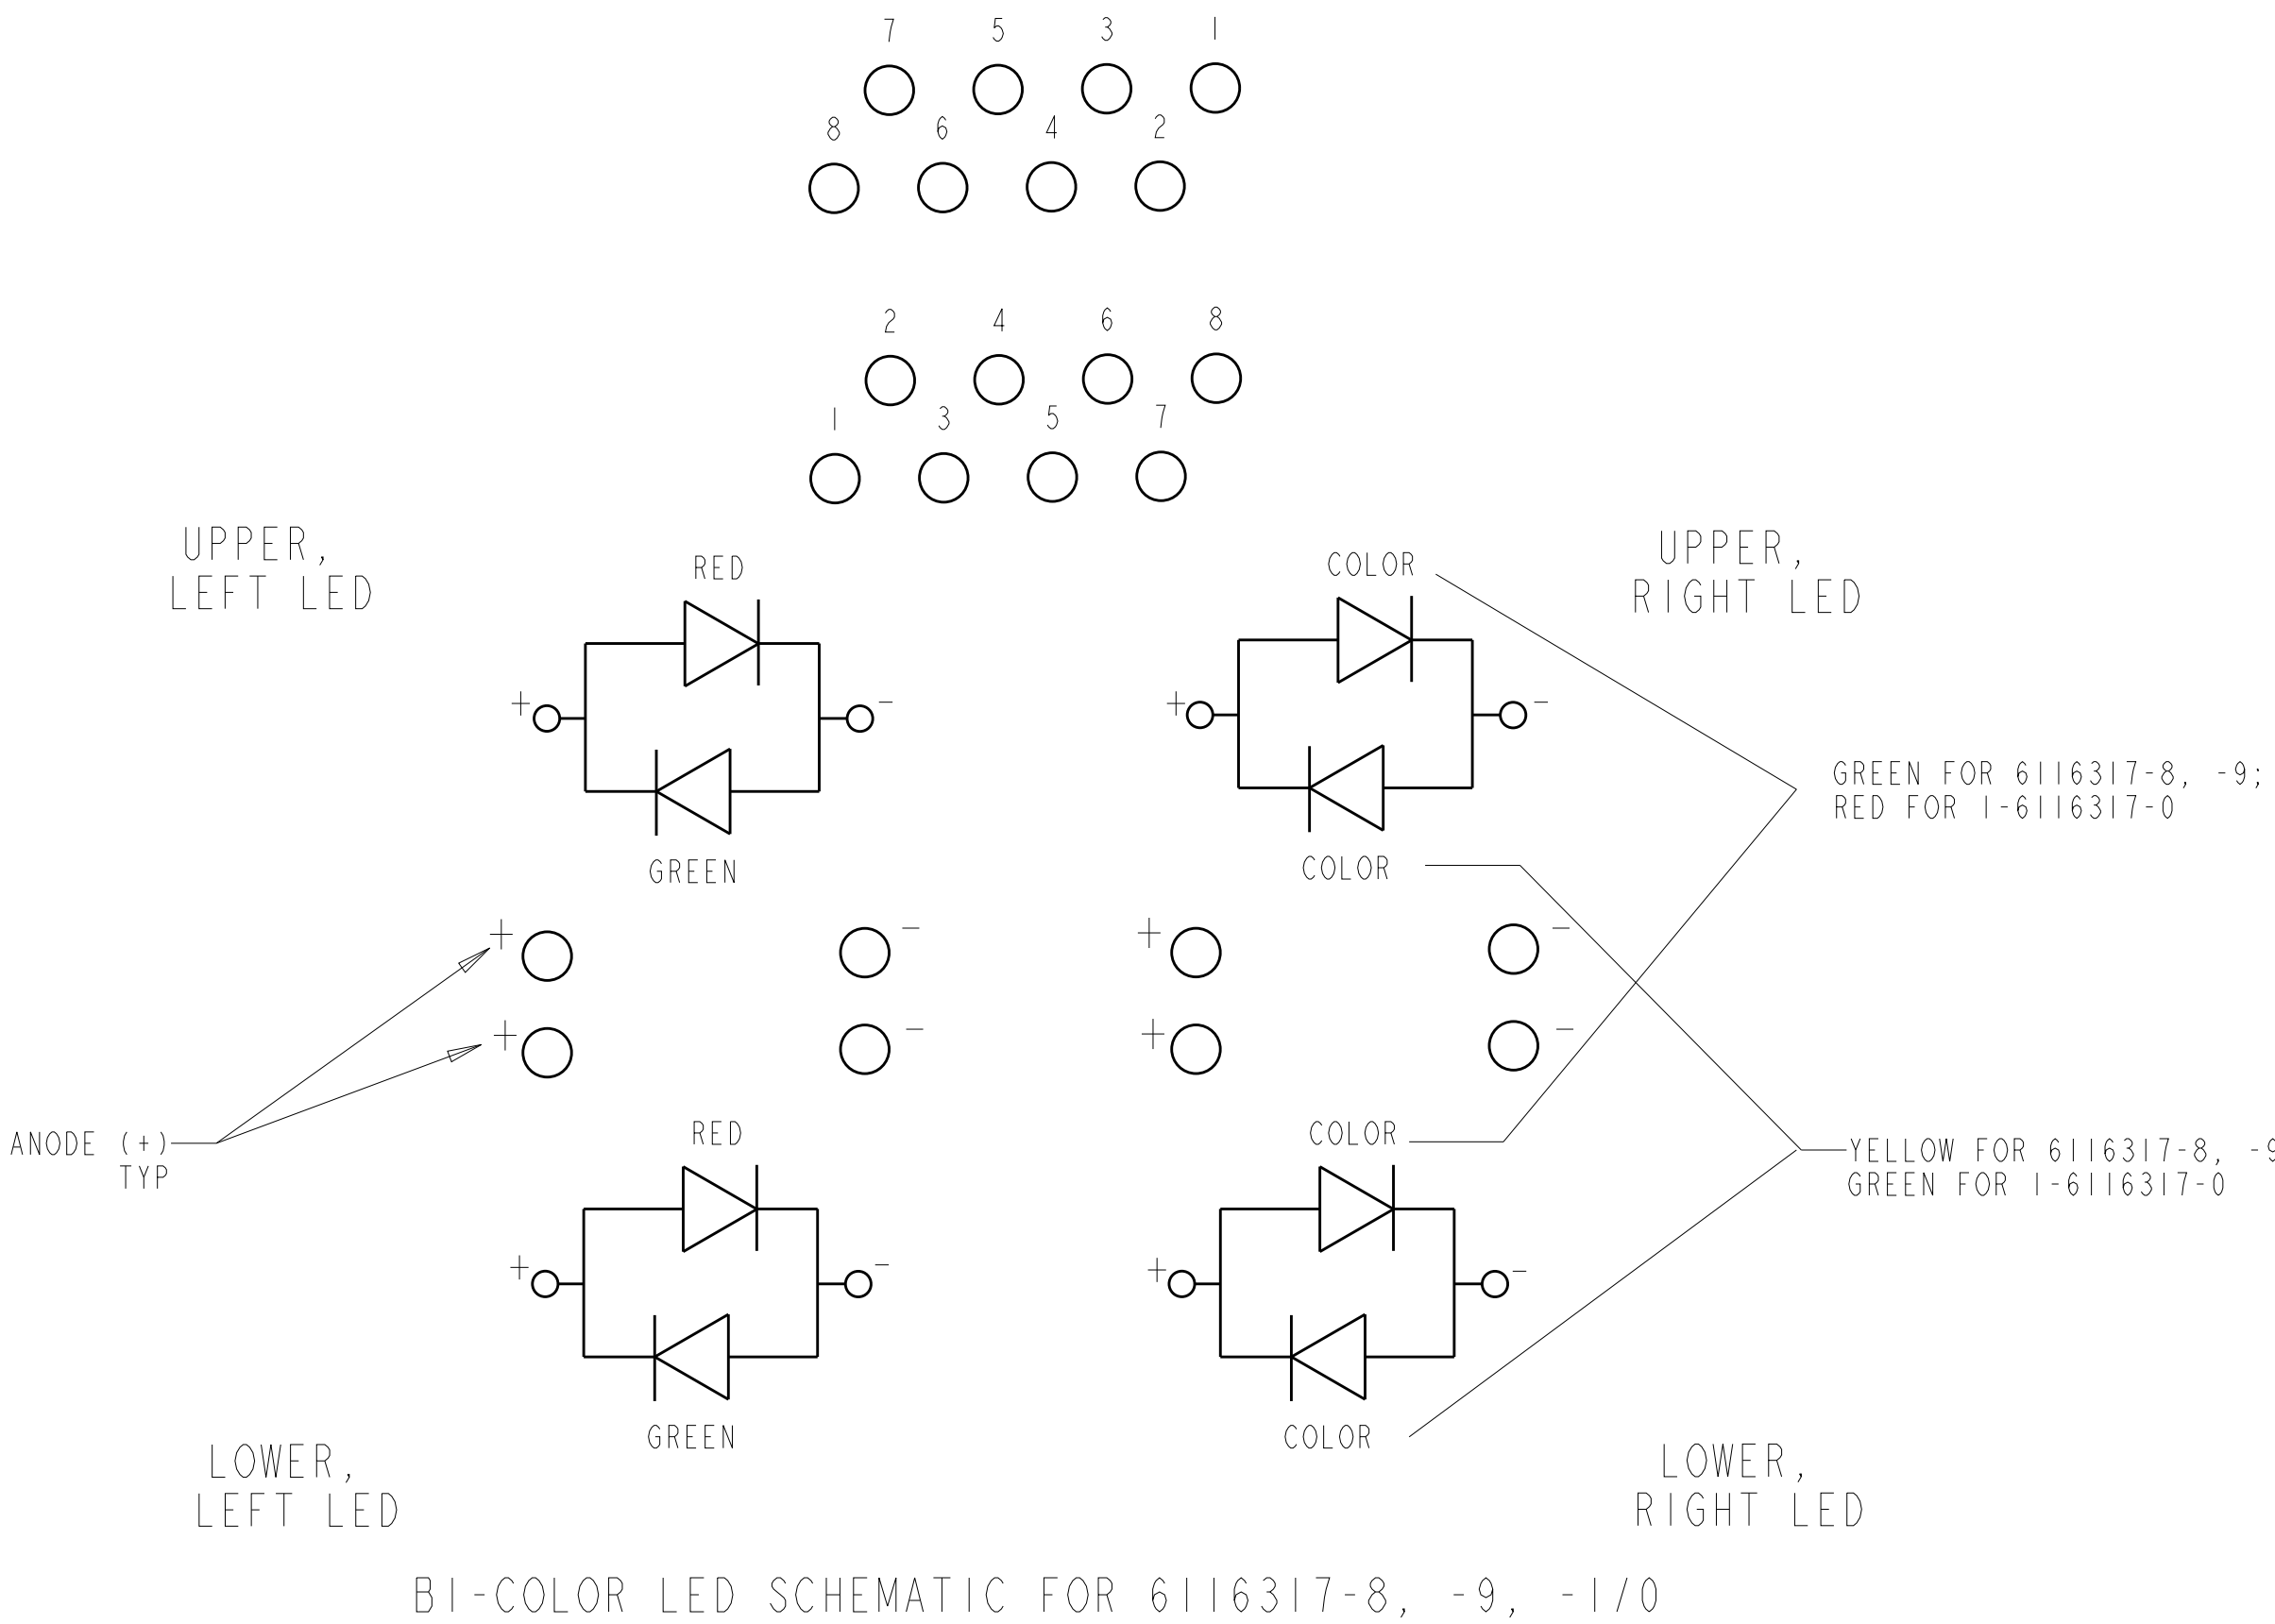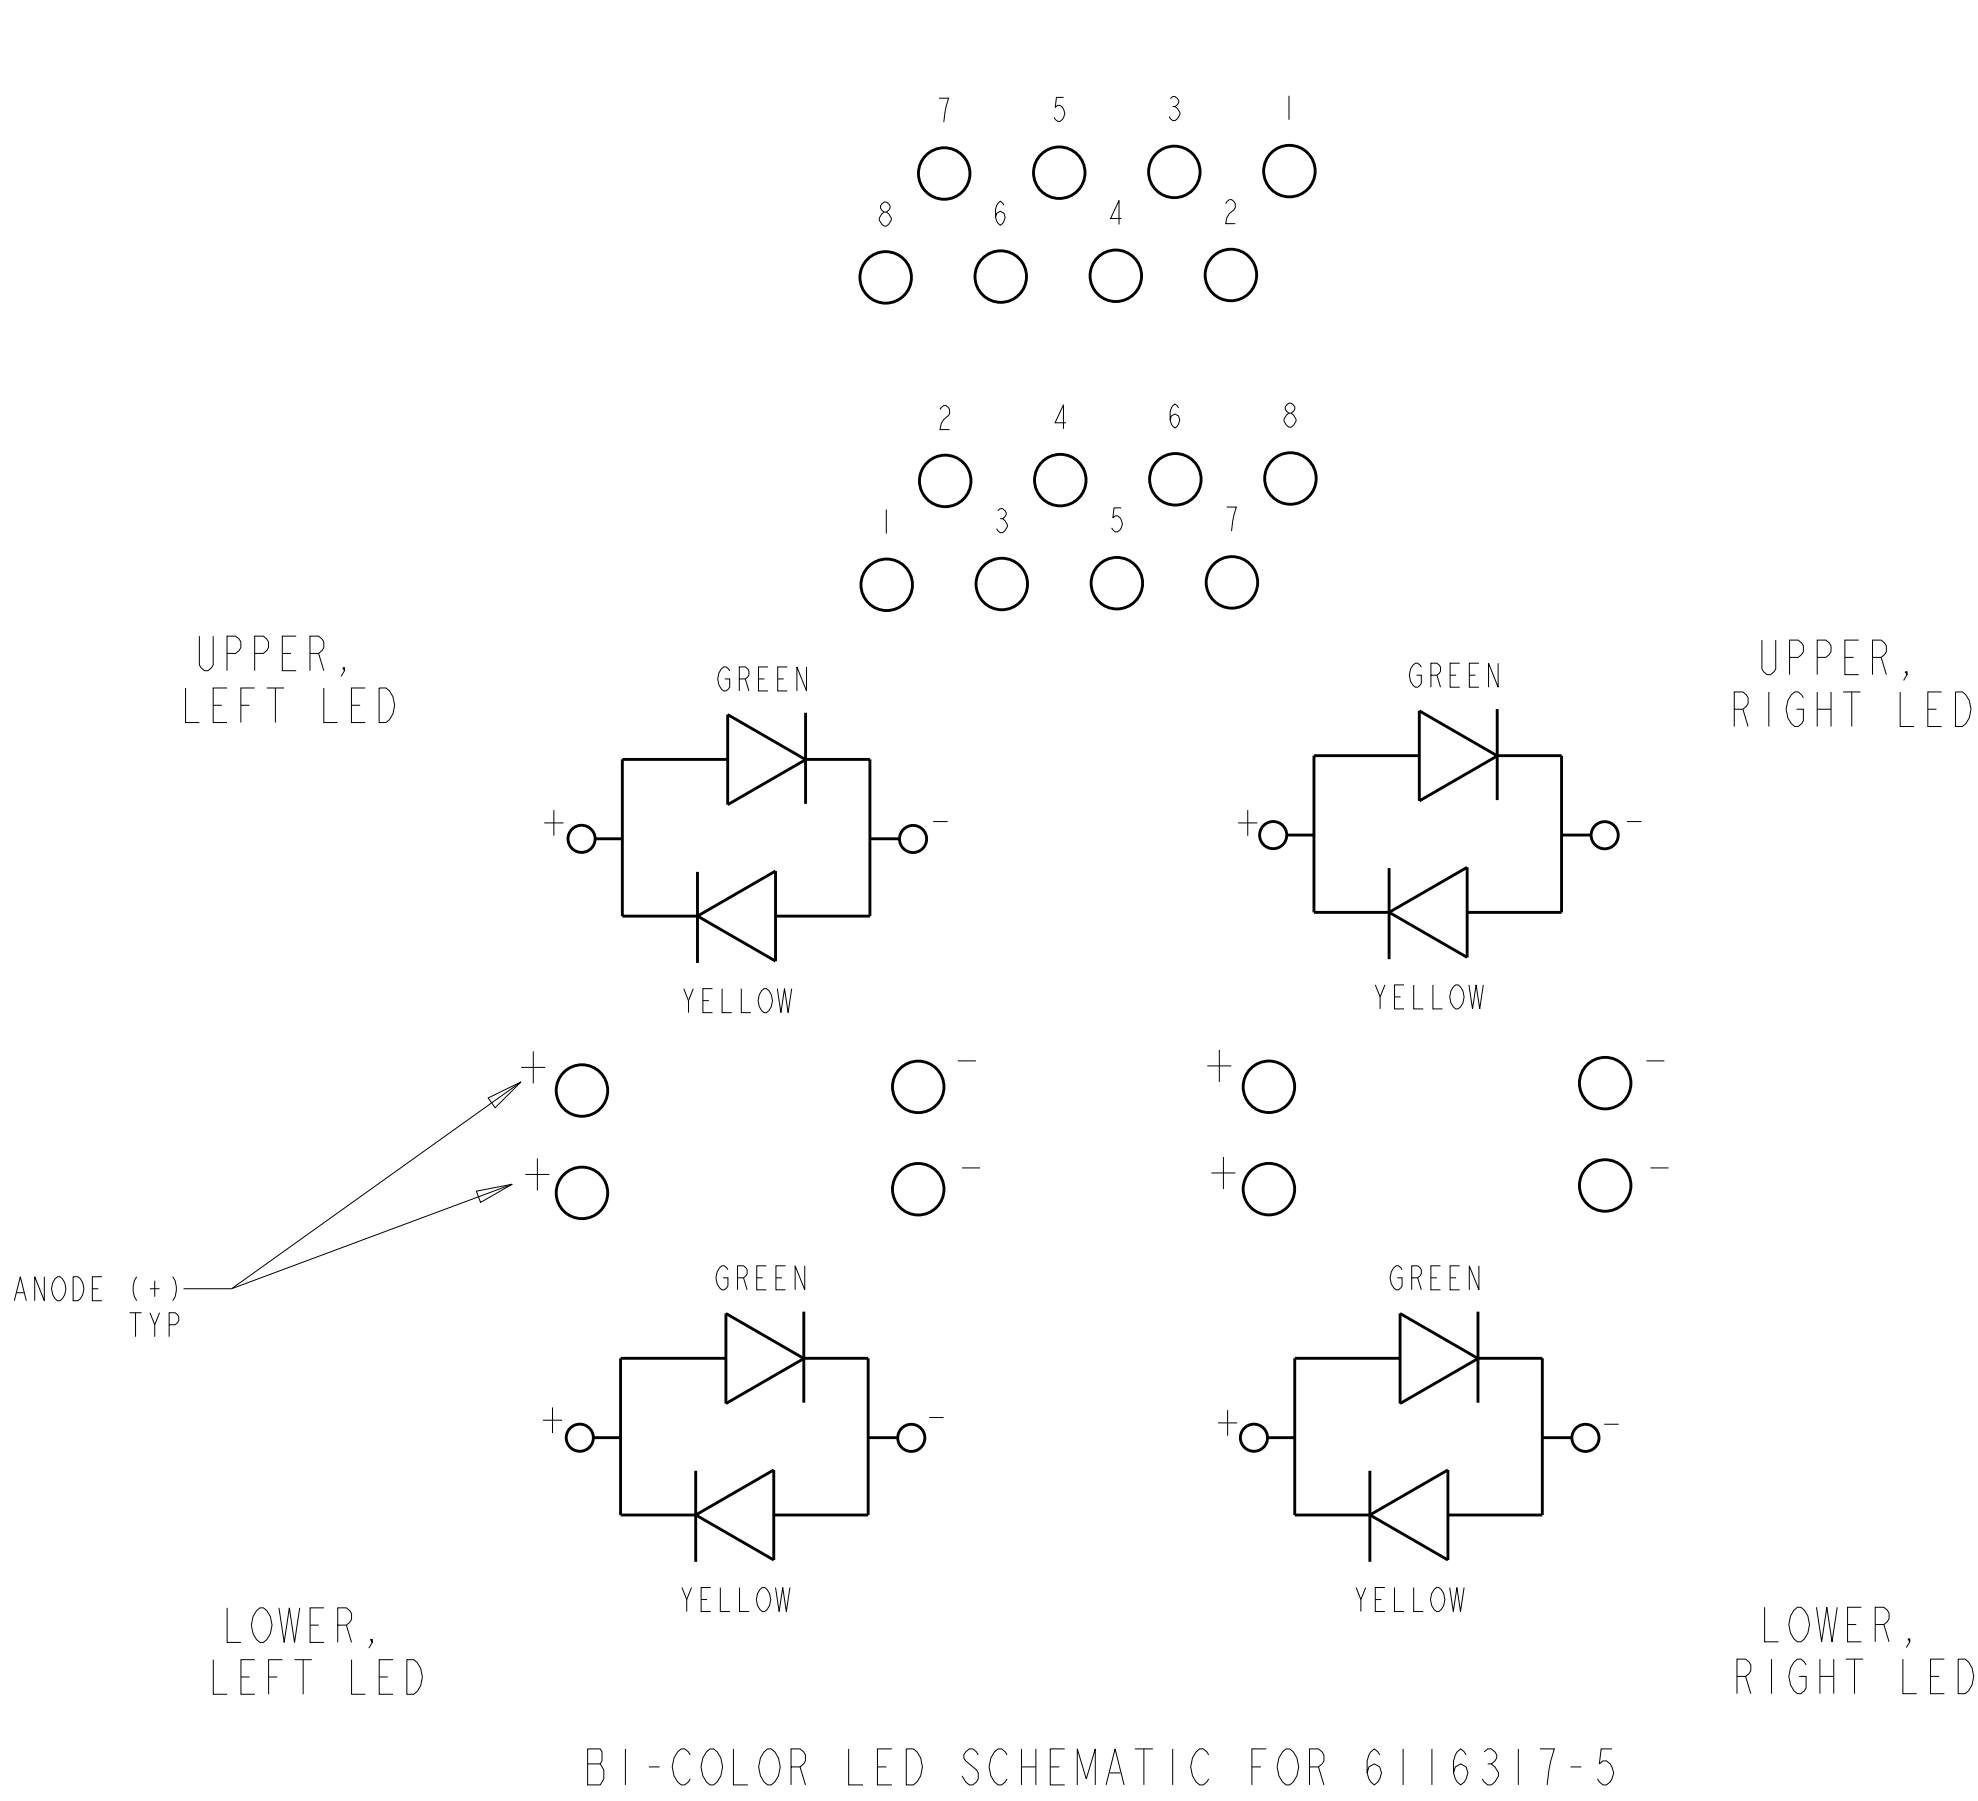

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA 23JUN2005	 TE Connectivity		
DIMENSIONS: INCHES[mm]		CHK J. WESTMAN 23JUN2005			
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.005 (0.13) 4 PLC ±.005 (0.13) ANGLES ± FINISH	APVD S. FLICKINGER 23JUN2005	NAME STACKED MODULAR JACK ASSEMBLY, 2X8 WITH LEDS, 8 POSITION, SHIELDED PANEL GROUND, OFFSET, CAT 5		
		PRODUCT SPEC 108-1854	SIZE A1		
		APPLICATION SPEC 114-2160	CAGE CODE 00779		
		WEIGHT 77.2 grams	DRAWING NO C=6116317		
MATERIAL -		CUSTOMER DRAWING		RESTRICTED TO -	
		SCALE 3:1	SHEET 3	OF 3	
		REV D			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru