

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0955032661

Status:

Active

Overview:

modular_plugs_jacks

Description:

6/6 JACK THROUGH HOLE NO KEY VERSION

Documents:

3D Model

Application Specification (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E107635

General

Product Family

Modular Jacks/Plugs

Series

95503

Component Type

PCB Jack

Magnetic

No

Overview

modular_plugs_jacks

Performance Category

3

Power over Ethernet (PoE)

N/A

Product Name

RJ11

Physical

Boot Color

N/A

Color - Resin

Black

Durability (mating cycles max)

1,000

Flammability

94V-0

Inverted / Top Latch

No

Lightpipes/LEDs

None

Material - Metal

Brass

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Orientation

Vertical (Top Entry)

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness Recommended (in)

0.062 In

PCB Thickness Recommended (mm)

1.57 mm

Packaging Type

Tray

Pitch - Mating Interface (in)

0.040 In

Pitch - Mating Interface (mm)

1.02 mm

Pitch - Term. Interface (in)

0.050 In

Pitch - Term. Interface (mm)

1.27 mm

Plating min: Mating (µin)

50.8

Plating min: Mating (µm)

1.27

Plating min: Termination (µin)

76

Plating min: Termination (µm)

1.9

Ports

1

Positions / Loaded Contacts

6/6

Surface Mount Compatible (SMC)

Yes

Temperature Range - Operating

-40°C to +80°C

Termination Interface: Style

Through Hole

Waterproof / Dustproof

No

Wire/Cable Type

N/A

Electrical

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

95503Series

Mates With

FCC 68 Plugs

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	125V DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-95003
Sales Drawing	SD-95503-003
Test Summary	STR-1181

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES :

1- MATERIAL:

- HOUSING: LCP FIBER GLASS FILLED UL 94-V0
COLOR BLACK.
- TERMINAL: TIN BRASS.

PLATING 2:

POST PLATE (0.00127-0.00152)/.000050-.000060 GOLD IN
CONTACT AREA. (0.00190)/.000075 MIN. PURE TIN IN TAIL
AREA BOTH OVER (0.00127)/.000050 MIN. NICKEL OVERALL.

PLATING 7: ONLY ON REQUEST

POST PLATE 0.00005/.000002 MIN GOLD OVER 0.000763
.000030 MIN PALLADIUM NICKEL IN CONTACT AREA.
0.00190/.000075 MIN PURE TIN IN TAIL AREA. BOTH
OVER 0.00127/.000050 MIN NICKEL OVERALL:

2- JACK FOR MATING WITH F.C.C. 68 PLUGS
90075 MOLEX SERIES.


3- PRODUCT SPECIFICATION PS-95503-001

4- PACKAGING SPECIFICATION PK-95003:


- STANDARD PACKAGING SHEET 1.
- TUBE PACKAGING FOR SMT VERSION SHEET 2.
- TUBE PACKAGING FOR THROUGH HOLE VERSION
SHEET 3.

5- MANUFACTURING I.D. CAN BE MXF, MG OR MXL



TYPE	POS. 4		POS. 6		POS. 8
	4 CKTS.	4 CKTS.	6 CKTS.	6 CKTS.	8 CKTS.
A	(11.18) / .440	(13.21) / .520	(13.21) / .520	(15.24) / .600	
B	(7.62) / .300	(10.16) / .400	(10.16) / .400	(11.43) / .450	
D	(3.81) / .150	(3.81) / .150	(6.35) / .250	(8.89) / .350	

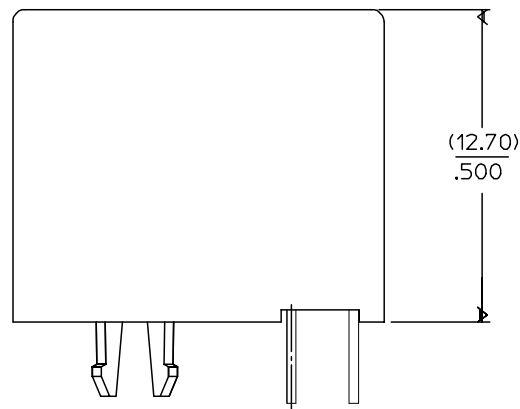

SHORT VERSION

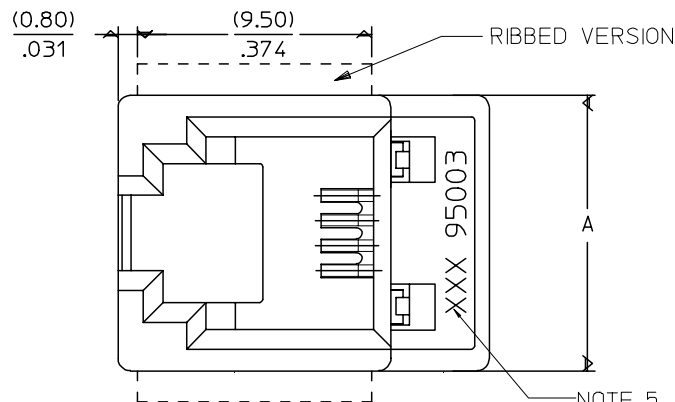

OPTIONAL KEYING

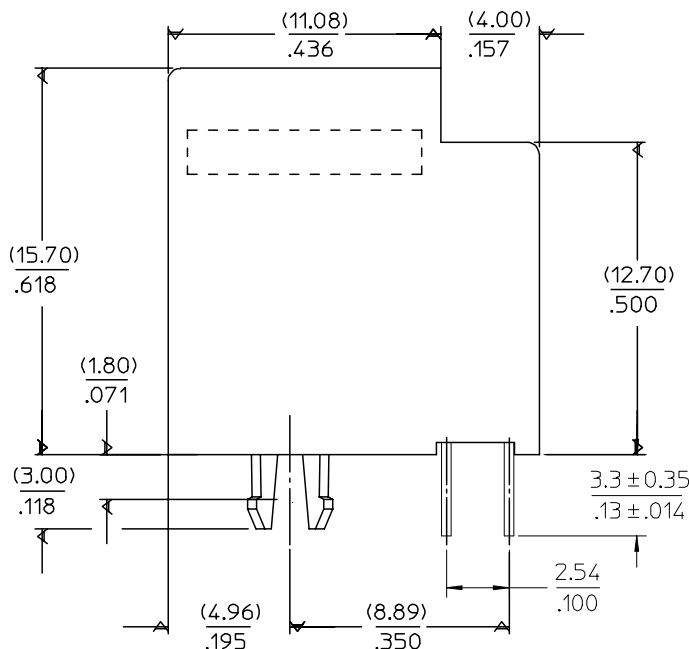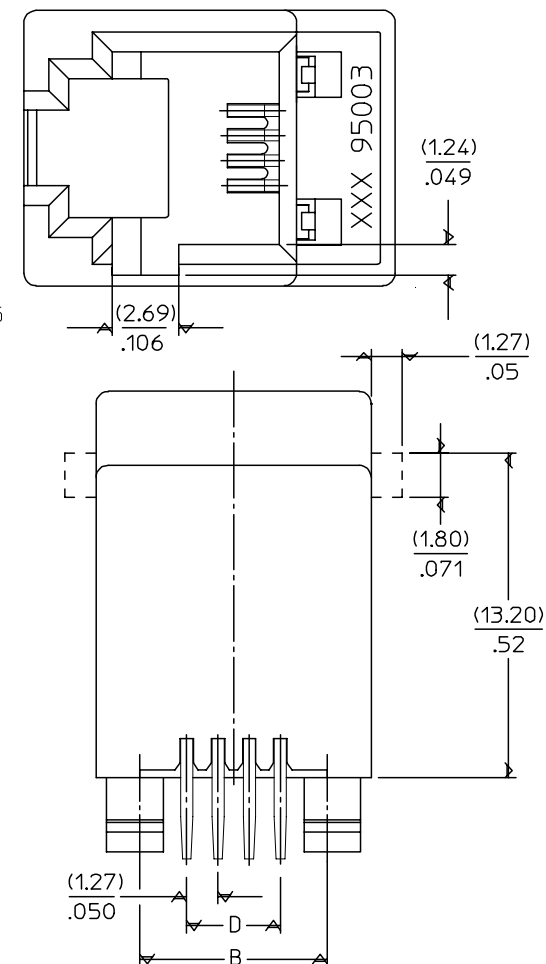

ADDED TABLE	DESCRIPTION
EC NO: E2008-0267	2007/11/27
DRWN:DBYRNES	2007/11/28
CHKD:	
APPR:EOMAHONY	2007/11/28
REV	

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
4 PLACES	± .005
3 PLACES	± .006
2 PLACES	± 0.15
1 PLACE	± 0.25
ANGULAR ± .5 °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM	IN
DRAWN BY	DATE
TMARTIN	2005/06/15
CHECKED BY	DATE
FCARABETTA	2005/06/15
APPROVED BY	DATE
KNOLLER	2005/06/15
MATERIAL NO.	
SEE SHT 4.5	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

SCALE 5:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
TITLE			
LOW PROFILE TOP ENTRY JACK (THROUGH HOLE VERSION)			
 MOLEX INCORPORATED			
DOCUMENT NO. SD-95503-003			SHEET NO. 1 OF 5

F

FBA

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru