




| REVISIONS |     |             |     |               |          |            |
|-----------|-----|-------------|-----|---------------|----------|------------|
| P         | LTR | DESCRIPTION |     |               | DATE     | DWN   APVD |
|           | AC  | REVISED     | PER | ECO-16-016096 | 9NOV2016 | DS   SY    |

D

C


B

A

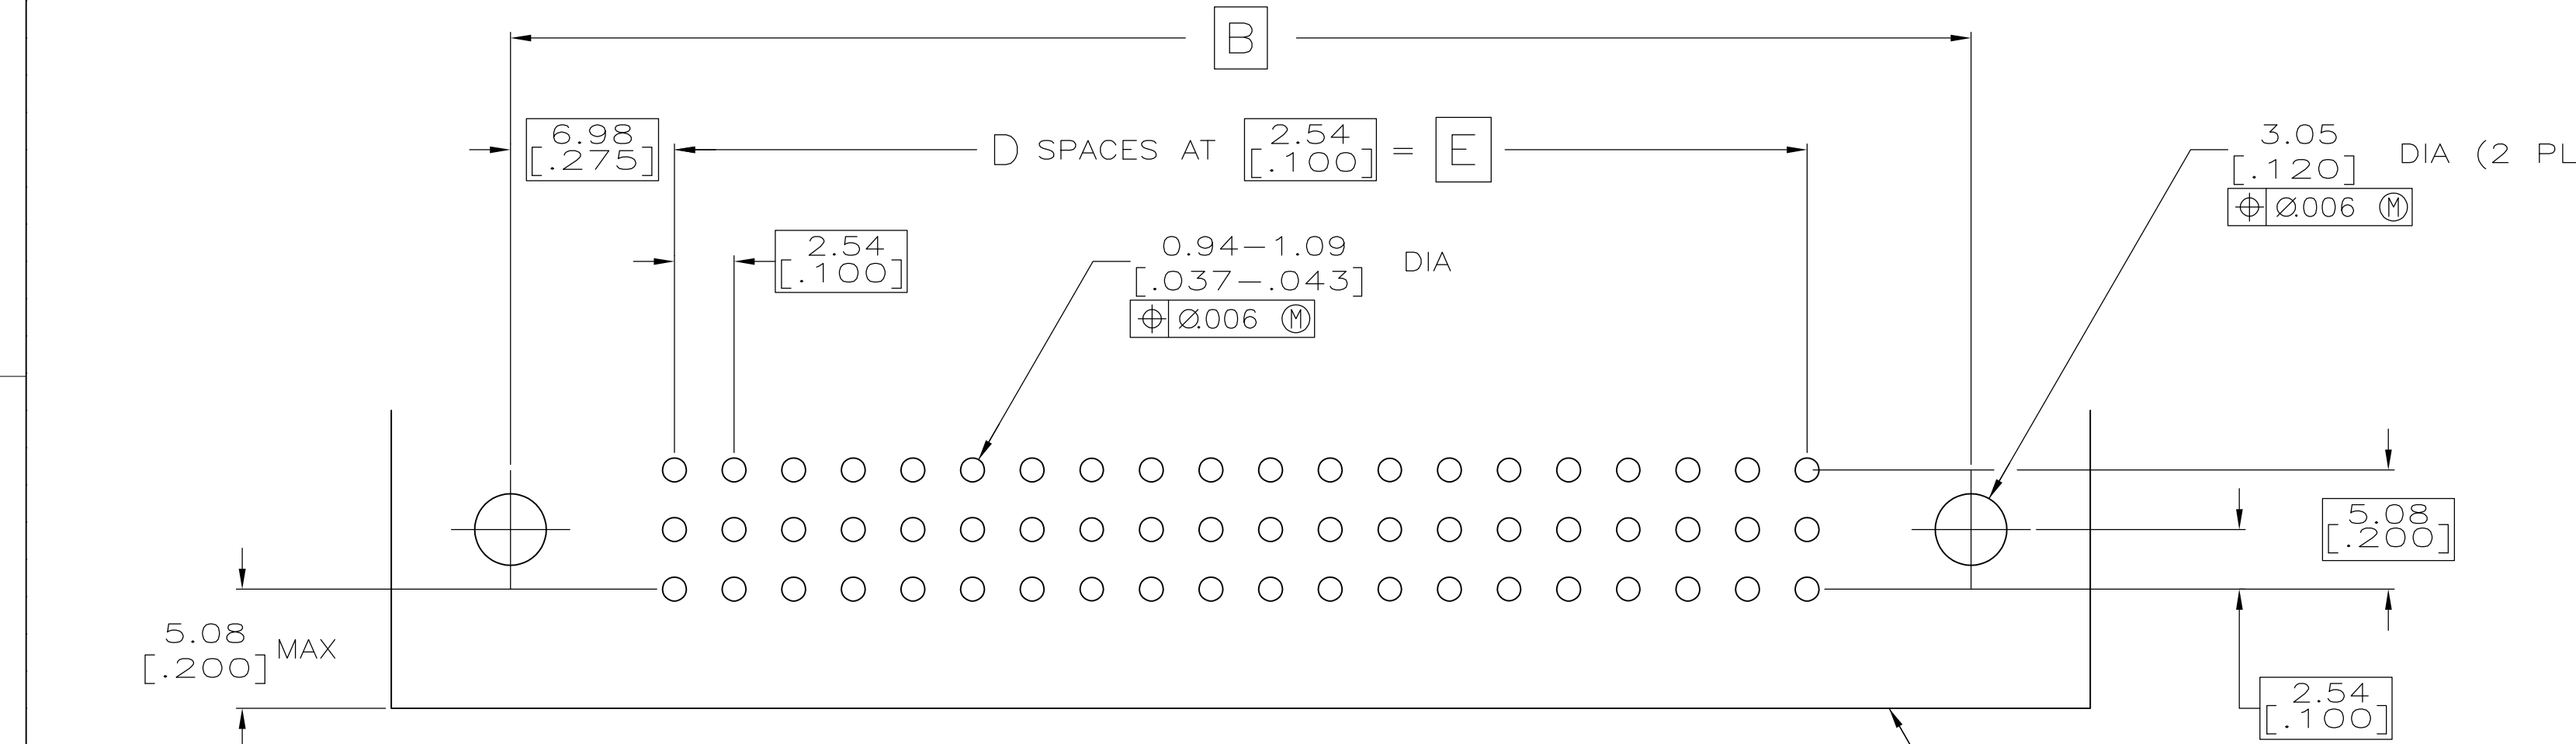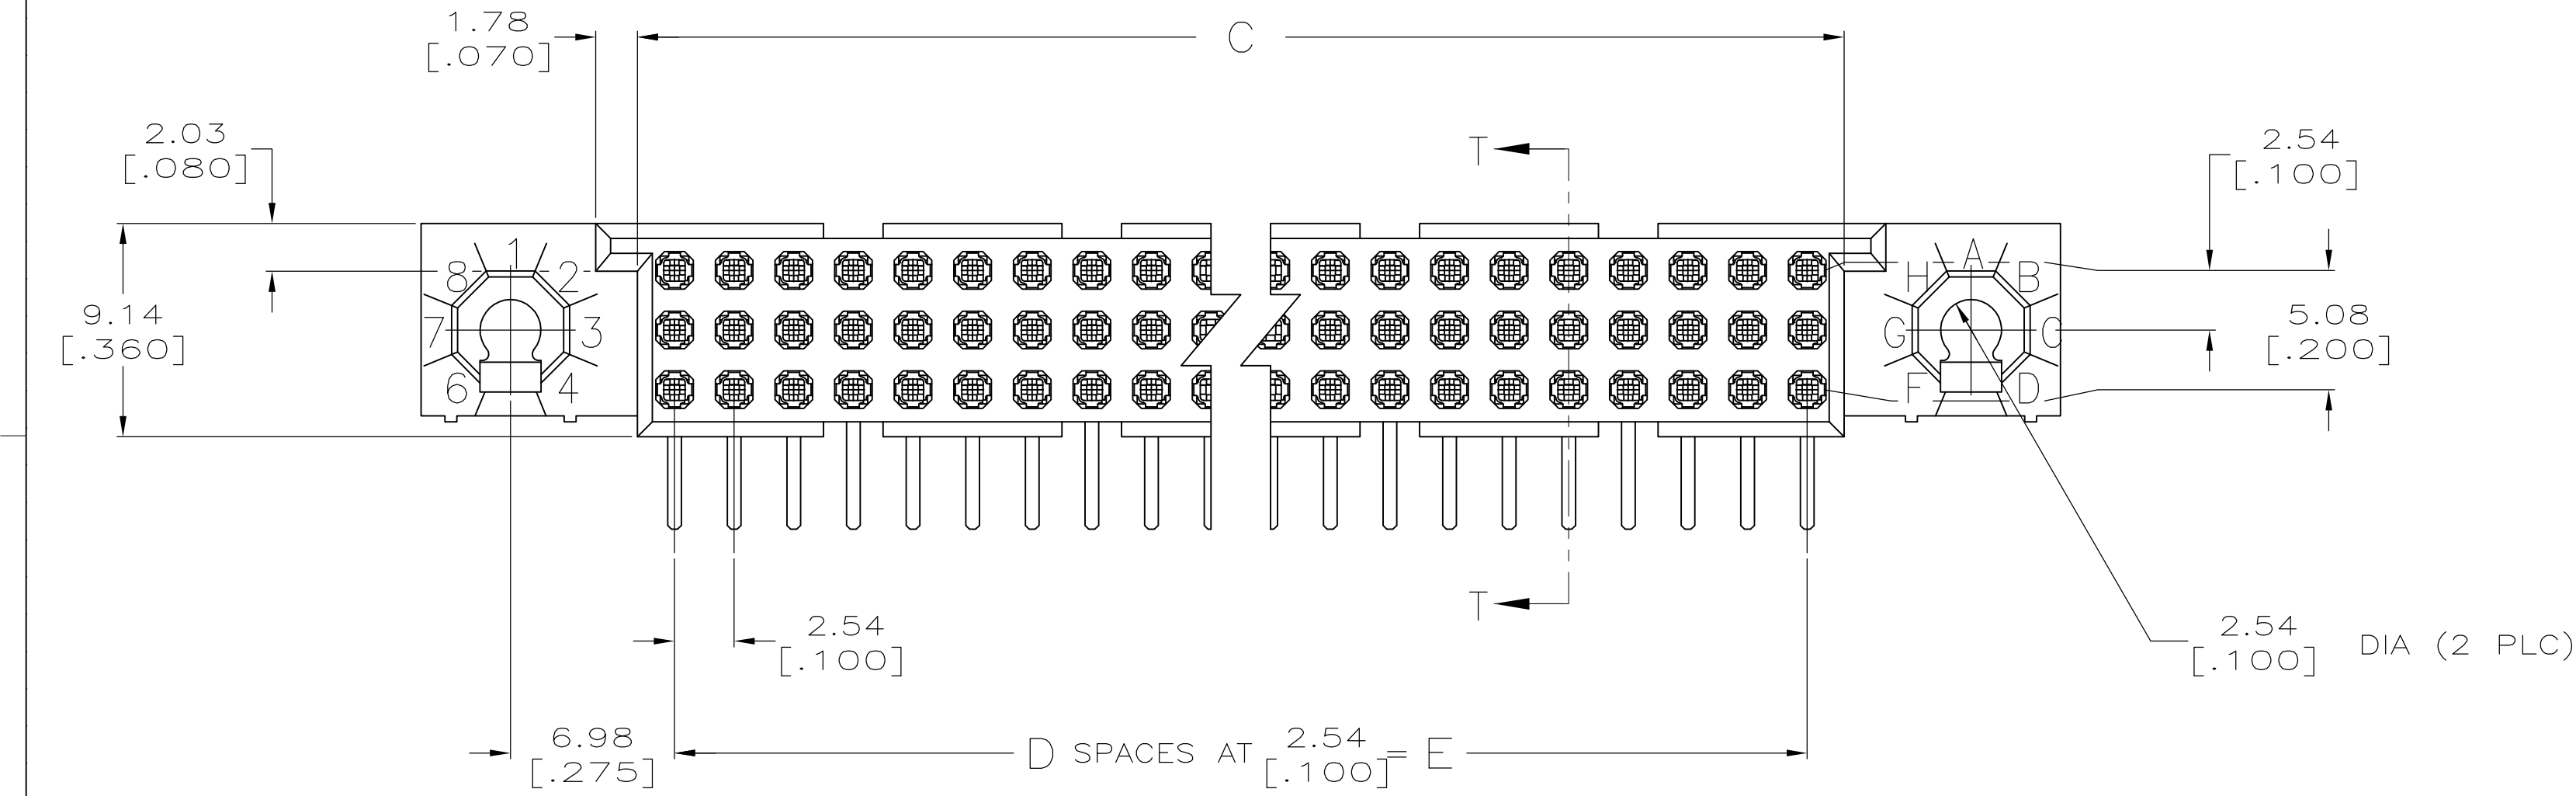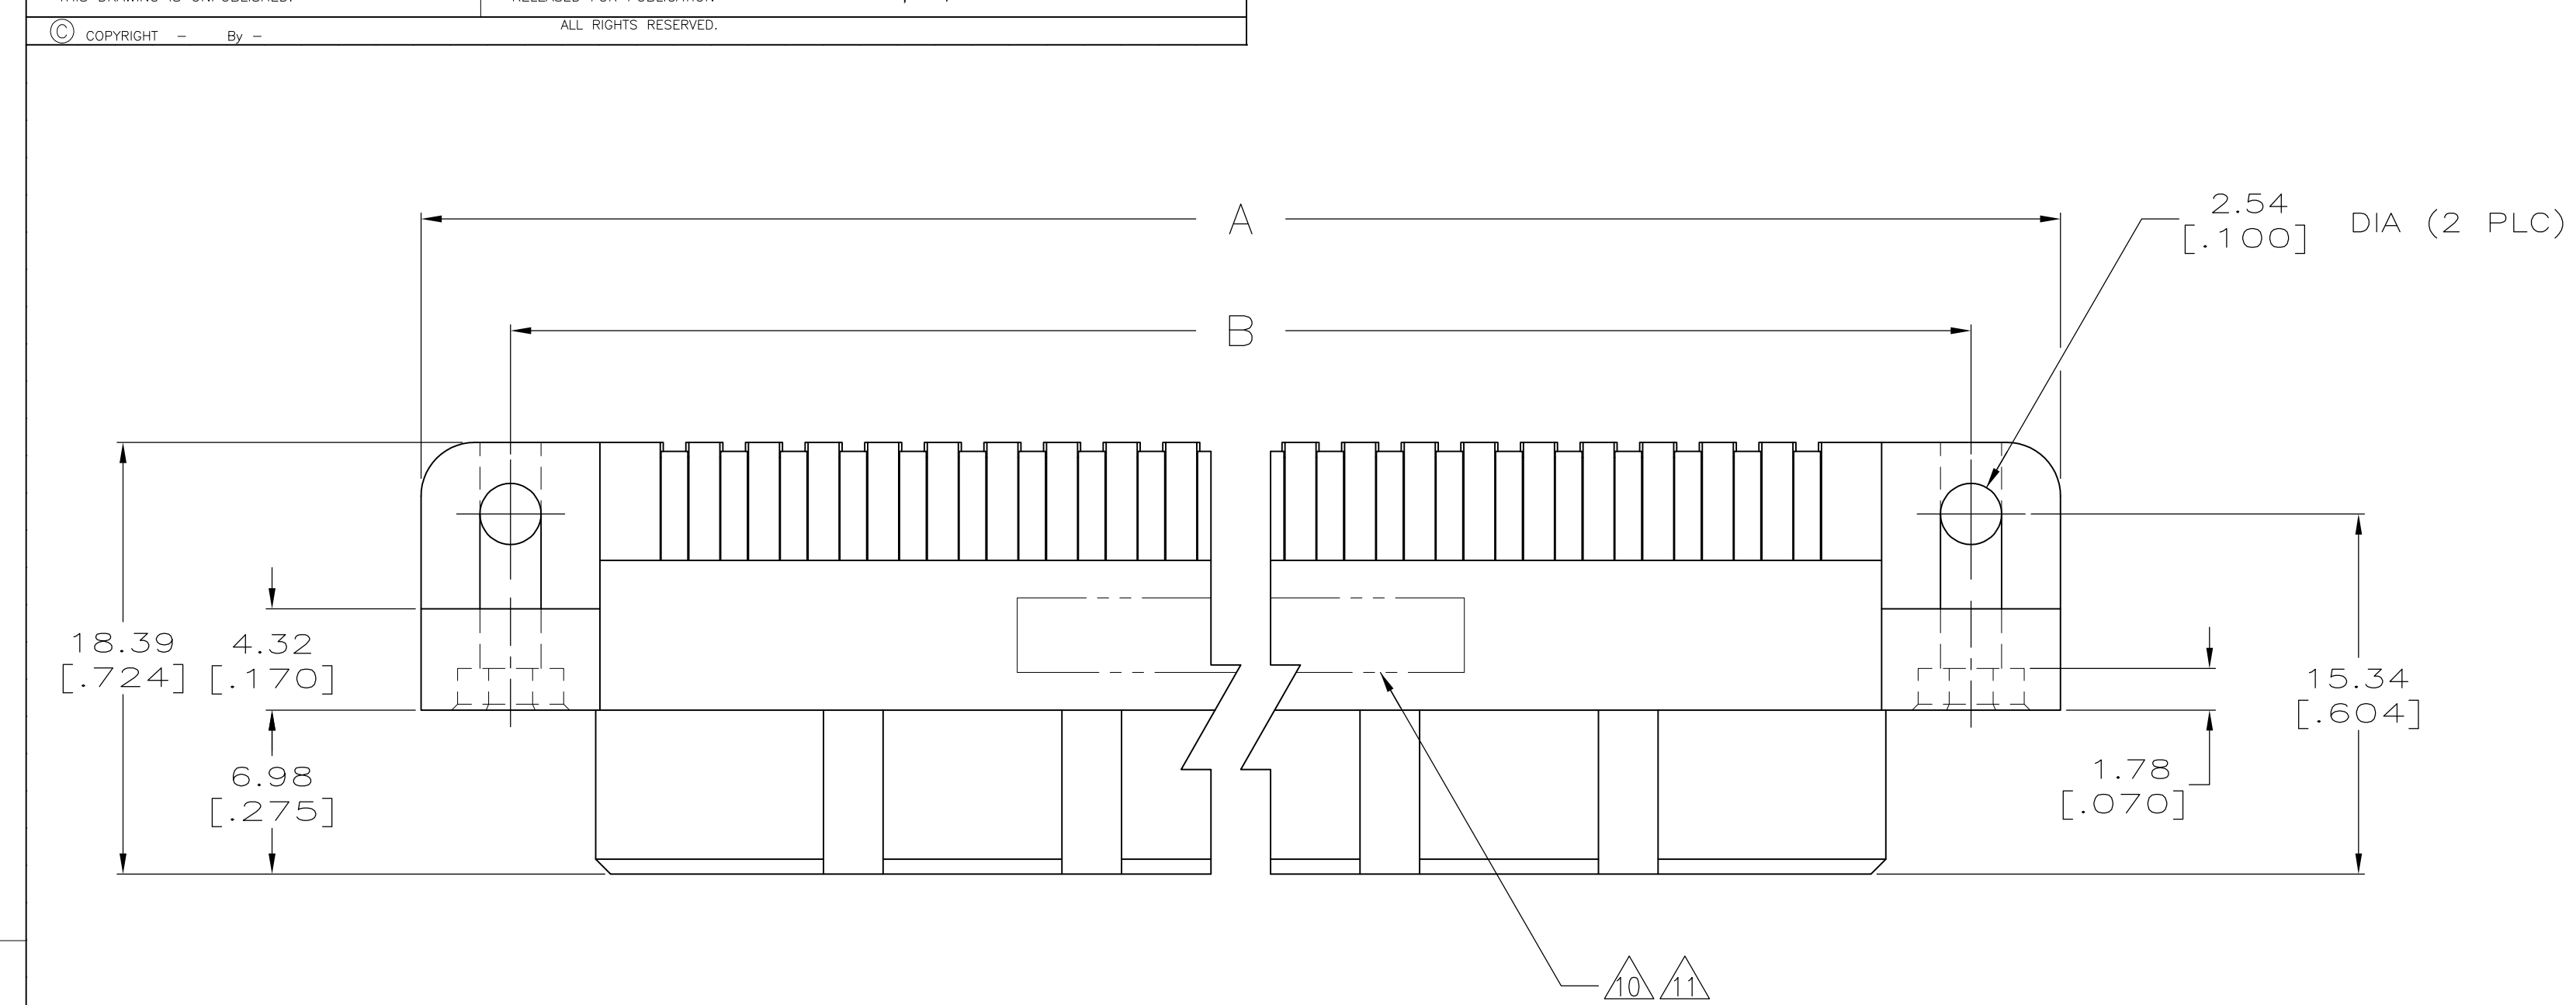


RECOMMENDED P.C. BOARD LAYOUT

P.C. BOARD

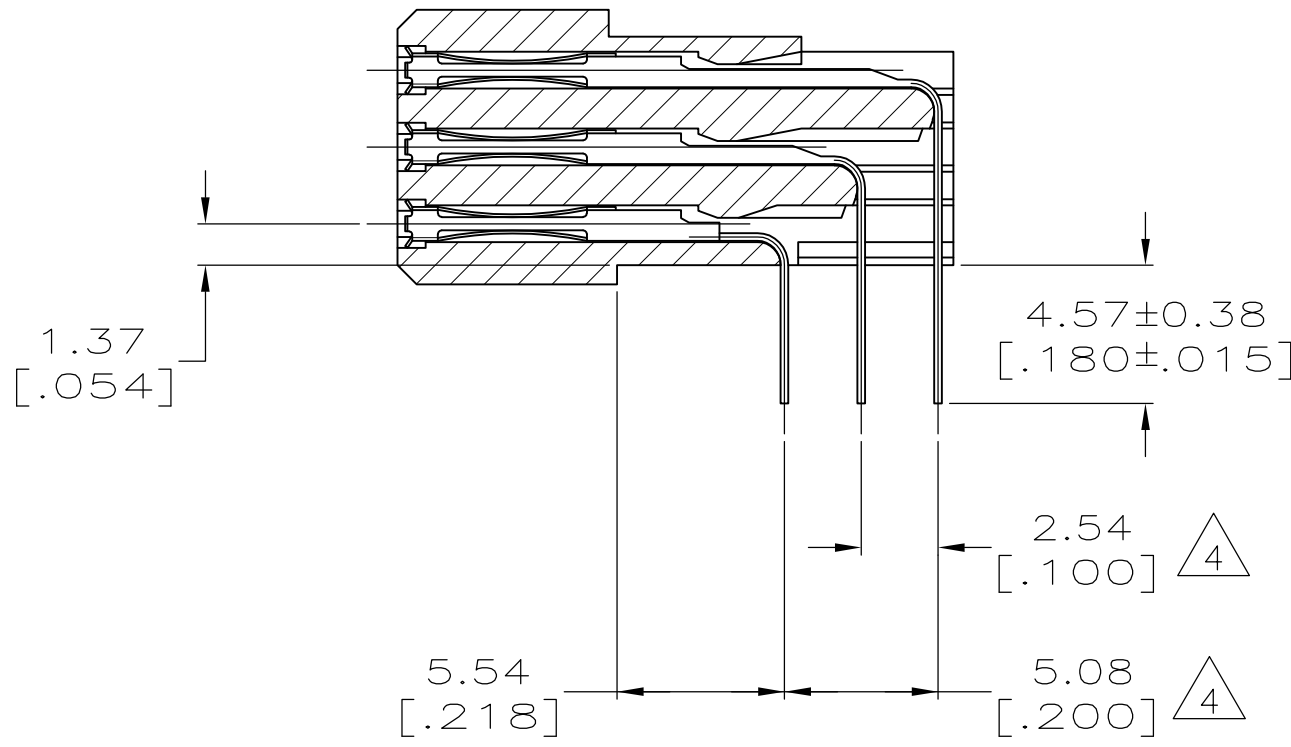

SECTION T-T

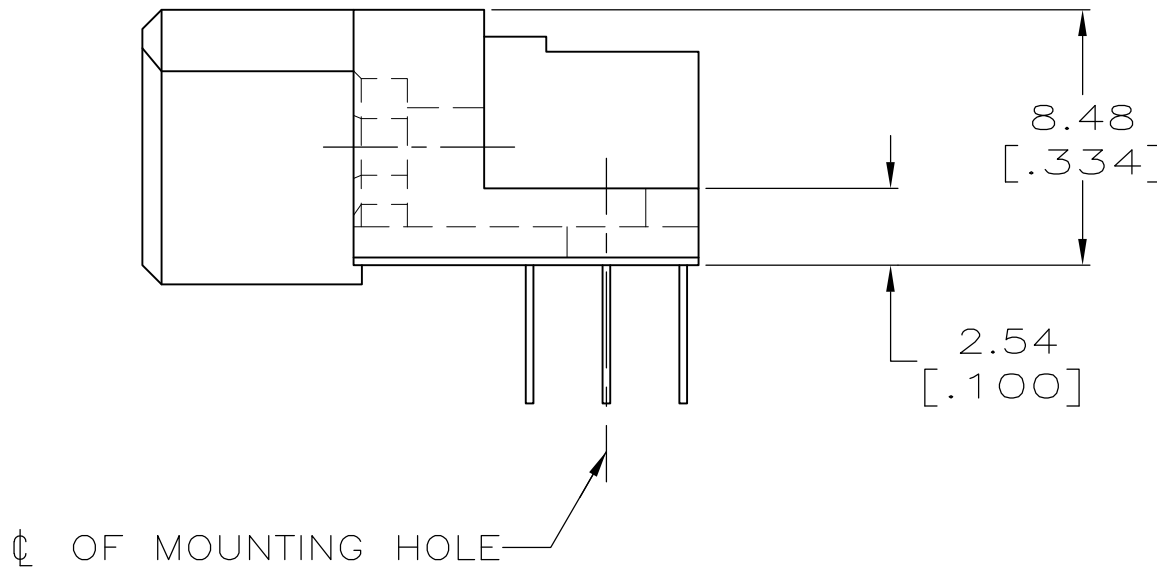

Ø OF MOUNTING HOLE

|                                        |                                           |                                  |                 |                                                                   |
|----------------------------------------|-------------------------------------------|----------------------------------|-----------------|-------------------------------------------------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |                                           | DWN<br>R.K. SEIFRIED<br>06/13/90 | TE Connectivity |                                                                   |
|                                        |                                           | CHK<br>G.SKIPPER<br>01/24/92     |                 |                                                                   |
| DIMENSIONS:<br>mm [INCHES]             | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED: | APVD<br>-                        | NAME            | HDI, 3 ROW, RECEPTACLE ASSEMBLY,<br>4.57 [.180] LONG SOLDER TAILS |
|                                        | 0 PLC ± -                                 | PRODUCT SPEC                     | SIZE            | 00779                                                             |
|                                        | 1 PLC ± -                                 | APPLICATION SPEC                 | CAGE CODE       | 532431                                                            |
|                                        | 2 PLC ± -                                 | WEIGHT                           | DRAWING NO      | 532431                                                            |
|                                        | 3 PLC ± 0.13 [.005]                       | SCALE                            | 1 OF 2          | REV AC                                                            |
|                                        | 4 PLC ± -                                 | RESTRICTED TO                    |                 |                                                                   |
|                                        | ANGLES ± -                                |                                  |                 |                                                                   |
| MATERIAL                               | FINISH                                    | CUSTOMER DRAWING                 |                 |                                                                   |

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

1

2

3

4

5

6

7

8

9

10

11

12

13

HOUSING MATERIAL: THERMOPLASTIC, COLOR=NATURAL.

CONTACT MATERIAL: COPPER ALLOY.

FINISH:

MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-9063; BASED ON TELCORDIA DR-1217-CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.

SOLDER TAILS AREA: TIN-LEAD PLATED.

SOLDER TAILS MUST FIT HOLE PATTERN AS SHOWN ON THE RECOMMENDED P.C. BOARD LAYOUT.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

PART NUMBER IS OBSOLETE.

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

NO CONTACT LUBRICANT

AMP, PART NUMBER, AND DATE CODE

OEFD0-983-9910-308, REV \_\_, 00779 AND DATE CODE, ONLY FOR PART NUMBER 2-532431-5

PART NUMBER IS FOR ROCKWELL COLLINS.

FINISH:

CONTACT FINISH: .00127-.00254 [.000050-.000100] NICKEL UNDERPLATE ALL OVER; .000762 [.000030] GOLD PLATE IN CONTACT AREA, TIN-LEAD PLATED POSTS.

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|-------------|------|-----|------|
| - | -   | SEE SHEET 1 | -    | -   | -    |

|                   |    |                    |                    |                    |      |             |
|-------------------|----|--------------------|--------------------|--------------------|------|-------------|
| 210.82<br>[8.300] | 83 | 213.97<br>[8.424]  | 224.79<br>[8.850]  | 232.41<br>[9.150]  | 252  | 4-532431-9  |
| 200.66<br>[7.900] | 79 | 203.81<br>[8.024]  | 214.63<br>[8.450]  | 222.25<br>[8.750]  | 240  | 4-532431-3  |
| 175.26<br>[6.900] | 69 | 178.41<br>[7.024]  | 189.23<br>[7.450]  | 196.85<br>[7.750]  | 210  | 4-532431-1  |
| 149.86<br>[5.900] | 59 | 153.01<br>[6.024]  | 163.83<br>[6.450]  | 171.45<br>[6.750]  | 180  | 3-532431-9  |
| 99.06<br>[3.900]  | 39 | 102.21<br>[4.024]  | 113.03<br>[4.450]  | 120.65<br>[4.750]  | 120  | 3-532431-5  |
| 60.96<br>[2.400]  | 24 | 64.11<br>[2.524]   | 74.93<br>[2.950]   | 82.55<br>[3.250]   | 75   | 3-532431-1  |
| 60.96<br>[2.400]  | 24 | 64.11<br>[2.524]   | 74.93<br>[2.950]   | 82.55<br>[3.250]   | 75   | 2-532431-5  |
| 27.94<br>[1.100]  | 11 | 31.09<br>[1.224]   | 41.91<br>[1.650]   | 49.53<br>[1.950]   | 36   | 2-532431-4  |
| 48.26<br>[1.900]  | 19 | 51.41<br>[2.024]   | 62.23<br>[2.450]   | 69.85<br>[2.750]   | 60   | 2-532431-3  |
| 43.18<br>[1.700]  | 17 | 46.33<br>[1.824]   | 57.15<br>[2.250]   | 64.77<br>[2.550]   | 54   | 2-532431-2  |
| 144.78<br>[5.700] | 57 | 147.93<br>[5.824]  | 158.75<br>[6.250]  | 166.37<br>[6.550]  | 174  | 2-532431-1  |
| 81.28<br>[3.200]  | 32 | 84.43<br>[3.324]   | 95.25<br>[3.750]   | 102.87<br>[4.050]  | 99   | 2-532431-0  |
| 210.82<br>[8.300] | 83 | 213.97<br>[8.424]  | 224.79<br>[8.850]  | 232.41<br>[9.150]  | 252  | 1-532431-9  |
| 243.84<br>[9.600] | 96 | 246.99<br>[9.724]  | 257.81<br>[10.150] | 265.43<br>[10.450] | 291  | 1-532431-8  |
| 251.46<br>[9.900] | 99 | 254.61<br>[10.024] | 265.43<br>[10.450] | 273.05<br>[10.750] | 300  | 1-532431-7  |
| 238.76<br>[9.400] | 94 | 241.91<br>[9.524]  | 252.73<br>[9.950]  | 260.35<br>[10.250] | 285  | 1-532431-6  |
| 226.06<br>[8.900] | 89 | 229.21<br>[9.024]  | 240.03<br>[9.450]  | 247.65<br>[9.750]  | 270  | 1-532431-5  |
| 213.36<br>[8.400] | 84 | 216.51<br>[8.524]  | 227.33<br>[8.950]  | 234.95<br>[9.250]  | 255  | 1-532431-4  |
| 200.66<br>[7.900] | 79 | 203.81<br>[8.024]  | 214.63<br>[8.450]  | 222.25<br>[8.750]  | 240  | 1-532431-3  |
| 187.96<br>[7.400] | 74 | 191.11<br>[7.524]  | 201.93<br>[7.950]  | 209.55<br>[8.250]  | 225  | 1-532431-2  |
| 175.26<br>[6.900] | 69 | 178.41<br>[7.024]  | 189.23<br>[7.450]  | 196.85<br>[7.750]  | 210  | 1-532431-1  |
| 162.56<br>[6.400] | 64 | 165.71<br>[6.524]  | 176.53<br>[6.950]  | 184.15<br>[7.250]  | 195  | 1-532431-0  |
| 149.86<br>[5.900] | 59 | 153.01<br>[6.024]  | 163.83<br>[6.450]  | 171.45<br>[6.750]  | 180  | 532431-9    |
| 137.16<br>[5.400] | 54 | 140.31<br>[5.524]  | 151.13<br>[5.950]  | 158.75<br>[6.250]  | 165  | 532431-8    |
| 124.46<br>[4.900] | 49 | 127.61<br>[5.024]  | 138.43<br>[5.450]  | 146.05<br>[5.750]  | 150  | 532431-7    |
| 111.76<br>[4.400] | 44 | 114.91<br>[4.524]  | 125.73<br>[4.950]  | 133.35<br>[5.250]  | 135  | 532431-6    |
| 99.06<br>[3.900]  | 39 | 102.21<br>[4.024]  | 113.03<br>[4.450]  | 120.65<br>[4.750]  | 120  | 532431-5    |
| 86.36<br>[3.400]  | 34 | 89.51<br>[3.524]   | 100.33<br>[3.950]  | 107.95<br>[4.250]  | 105  | 532431-4    |
| 78.74<br>[3.100]  | 31 | 81.89<br>[3.224]   | 92.71<br>[3.650]   | 100.33<br>[3.950]  | 96   | 532431-3    |
| 73.66<br>[2.900]  | 29 | 76.81<br>[3.024]   | 87.63<br>[3.450]   | 95.25<br>[3.750]   | 90   | 532431-2    |
| 60.96<br>[2.400]  | 24 | 64.11<br>[2.524]   | 74.93<br>[2.950]   | 82.55<br>[3.250]   | 75   | 532431-1    |
| E                 | D  | C                  | B                  | A                  | POSN | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm [INCHES]

0 PLC  
1 PLC  
2 PLC  
3 PLC  
4 PLC

± -  
± -  
± -  
± 0.13 [.005]  
± ±

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC  
1 PLC  
2 PLC  
3 PLC  
4 PLC

± -  
± -  
± -  
± 0.13 [.005]  
± ±

ANGLES

FINISH

MATERIAL

FINISH

DWN  
R.K. SEIFRIED  
CHK  
G.SKIPPER  
APVD

06/13/90  
01/24/92

NAME

PRODUCT SPEC

APPLICATION SPEC

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

WEIGHT

00779

532431

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV AC

TE Connectivity

HOI, 3 ROW, RECEPTACLE ASSEMBLY,  
4.57 [.180] LONG SOLDER TAILS

4805 (1/15)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)