

SPECIFICATION

Part No. : **MB.200.C**

Product Name : Magneto

Features : 3 Way Base Mount for LTE or WIFI MIMO 2*2 antennas

- Magnetic Mount

- Wall Mount

- Desktop Mount

SMA(F) Jacks for Antennas

SMA(M)Straight Plug on Cable

Standard RG316 1 meter cable length

Dimensions 80mm *96mm * 25mm

RoHS compliant



Desk Top/ Magnetic Mount



Wall Mount

1. Introduction

The MB.200 is a sturdy 3 way base mount for LTE or WIFI MIMO 2*2 Antennas. The standard base version comes with high quality 1 meter small diameter Teflon jacket RG316 cable to allow for flexibility of placement. The base has undergone extensive pull force testing.

The base SMA connectors where the antenna elements connect are SMA(F), so the mating antenna needs to be SMA(M) straight connector type. The base cable itself has a SMA(M) connector. The cable length and cable connector types are customizable, subject to MOQ. The connector can be customizable on the base itself subject to NRE and MOQ.

Options

- Magnetic
- Desktop
- Wall

Magnetic Mount

With six super-magnets embedded, the base mounts permanently to metal surfaces

Wall Mount

Mounting holes in the base make it easy to mount on a wall

Desktop


EVA foam under the base ensures a good grip for desktop use

In practice any antenna model with a standard SMA(M) connector can be used with this base. Taoglas has for 2G/3G/4G applications the TG.35, TG.30, TG.09, or TG.08 For Dual-band WiFi we recommend the TG35 or the GW71.


Contact your regional Taoglas sales office for support.

2. RG316 Cable Specification

2.1 Drawing – Cross Section

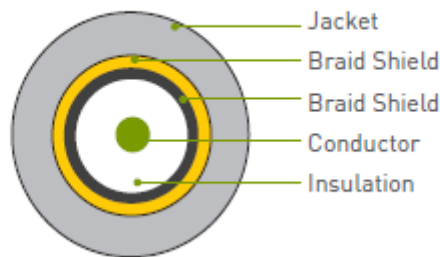


2.2 Structure and Dimensions

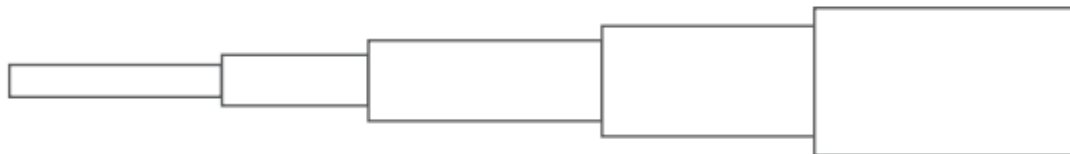

Conductor	Insulation	Braid Shield	Braid Shield	Jacket
- Material - Silver Coated Copper Clad Steel 26AWG (7/0.175mm) - Diameter - 0.53mm	- Material - FEP - Avg. Thickness - 0.51mm - Diameter - 1.53±0.03mm - Colour - Clear	- Material - Silver Coated Copper - Structure - 16/5/0.10mm - Coverage - 95% - Diameter - 1.98±0.05mm	- Material - Silver Coated Copper - Structure - 16/5/0.10mm - Coverage - 86% - Diameter - 2.38 ± 0.05mm	- Material - FEP - Avg. Thickness - 0.30mm - Diameter - 2.90±0.10mm - Colour - Brown

Rating Temp Voltage:	105°C 30V					
Insulation Resistance:	3000 MΩ-Km (Min)					
Conductor Resistance:	302 Ω/Km 20°C (Max)					
Dielectric Strength:	AC 1 KV/Minute					
Spark Test	5.0 KV					
Nom. Impedance	50 ± 3 Ω					
Nom. Capacitance	95.8 ± 3 pF/m					
Nom. Vel. of Prop.	69%					
VSWR (0-6 GHz)	Max 1.3					
Attenuation	2GHz	2.4GHz	3GHz	4GHz	5GHz	6GHz
(dB / 1M)	1.35	1.5	1.62	1.91	2.2	2.7


2.3 Cable Insertion Loss

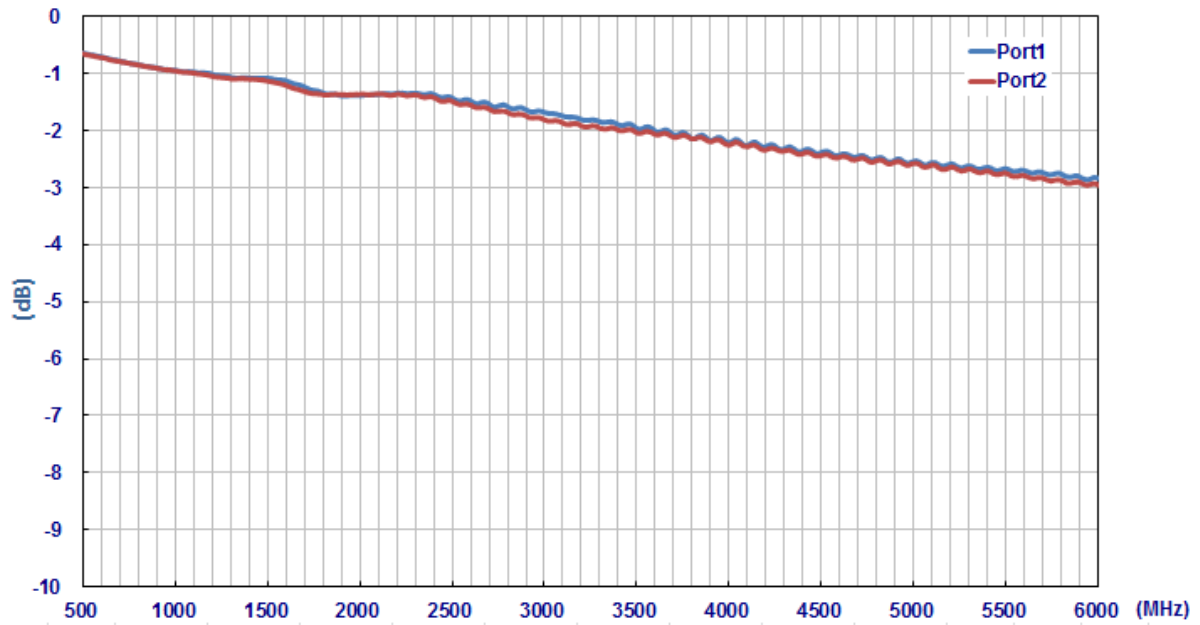

2.4 Electrical & Physical Specification


MB200 Port1							
Attenuation	500MHz	1000MHz	2000MHz	3000MHz	4000MHz	5000MHz	6000MHz
S12	-0.64	-0.94	-1.39	-1.68	-2.21	-2.54	-2.84
Nom. Impedance	50 Ohm						
MB200 Port1							
Frequency (MHz)	500MHz	1000MHz	2000MHz	3000MHz	4000MHz	5000MHz	6000MHz
S12	-0.66	-0.96	-1.36	-1.81	-2.25	-2.58	-2.96
Nom. Impedance	50 Ohm						
MECHANICAL							
Casing			ABS+PC				
Coaxial Cable			RG316				
Cable Length			1 meters				
Connector			SMA(M)ST				
Connector Max. Torque			0.9 Nm				
Weight			220 g				
Magnetic mount (unit)			1.0 kgf				
ENVIRONMENTAL							
Operation Temperature			-40°C to 85°C				
Storage Temperature			-40°C to 85°C				
Humidity			Non-condensing 65°C 95% RH				

3. Magnetic Pull Force (Kilogram-Force (kgf))

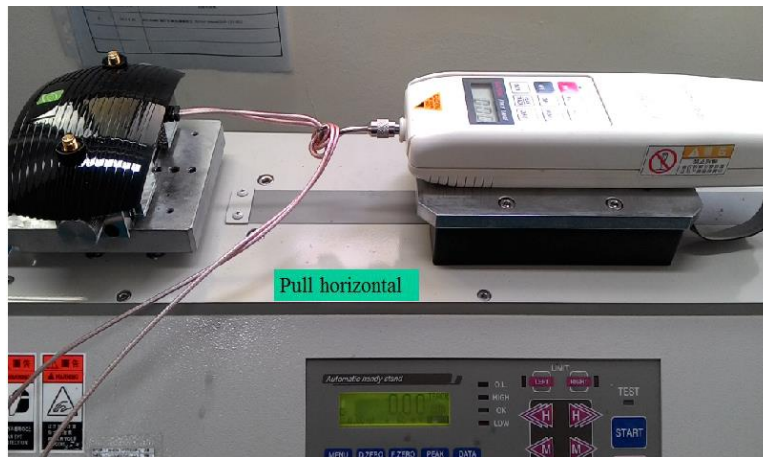


Horizontal Pull Force Breakdown : 1.28Kgf


Distance(mm)	10	20	30	40	50	60	70
Pulling force(Kgf)	1.28	1.79	0.92	0.93	1.3	0.79	0.06

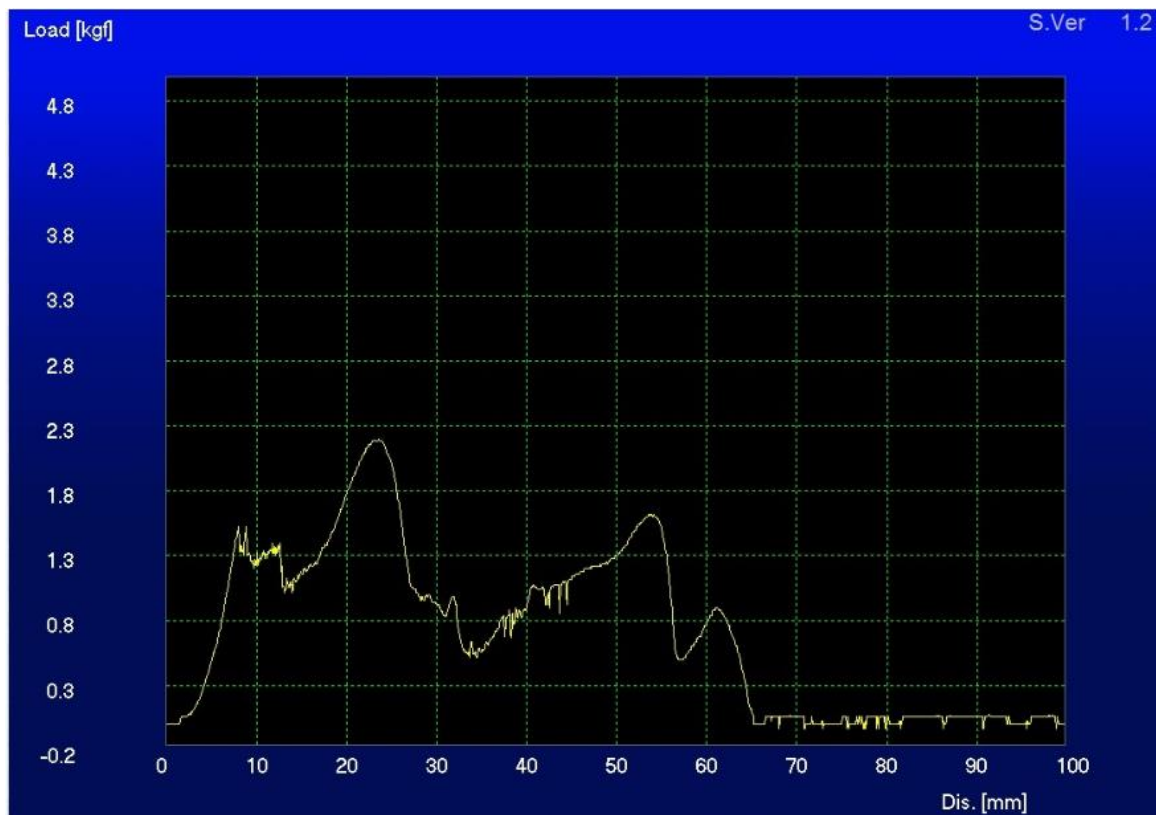

4. Mechanical Drawing

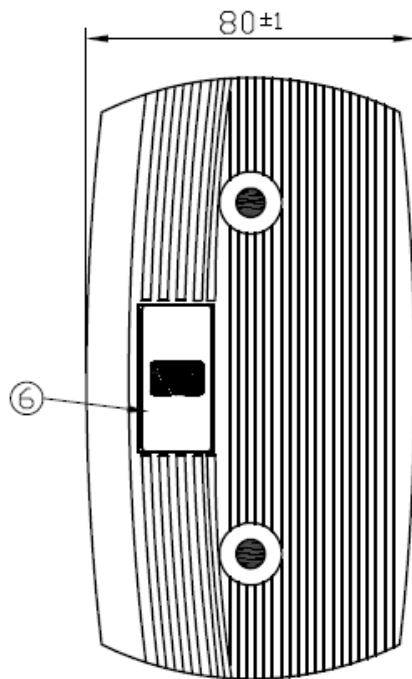


	Name	P/N	Material	Finish	QTY
1	Housing	000114E000087A	ABS+PC	Black	1
2	RG316 Coaxial Cable	301614E000087A	FEP	Brown	2
3	Heat Shrink Tube	001313D000087A	PE	Black	2
4	SMA(M)ST	200212L010087A	Brass	Gold	2
5	MB.200 Bottom Foam	001014E050087A	EVA+T4000	Black	1
6	MB.200 Logo Label	001014E040087A	Coated Paper	Black	1
7	SMA(F)BH ST	200214J000087A	Brass	Gold	2

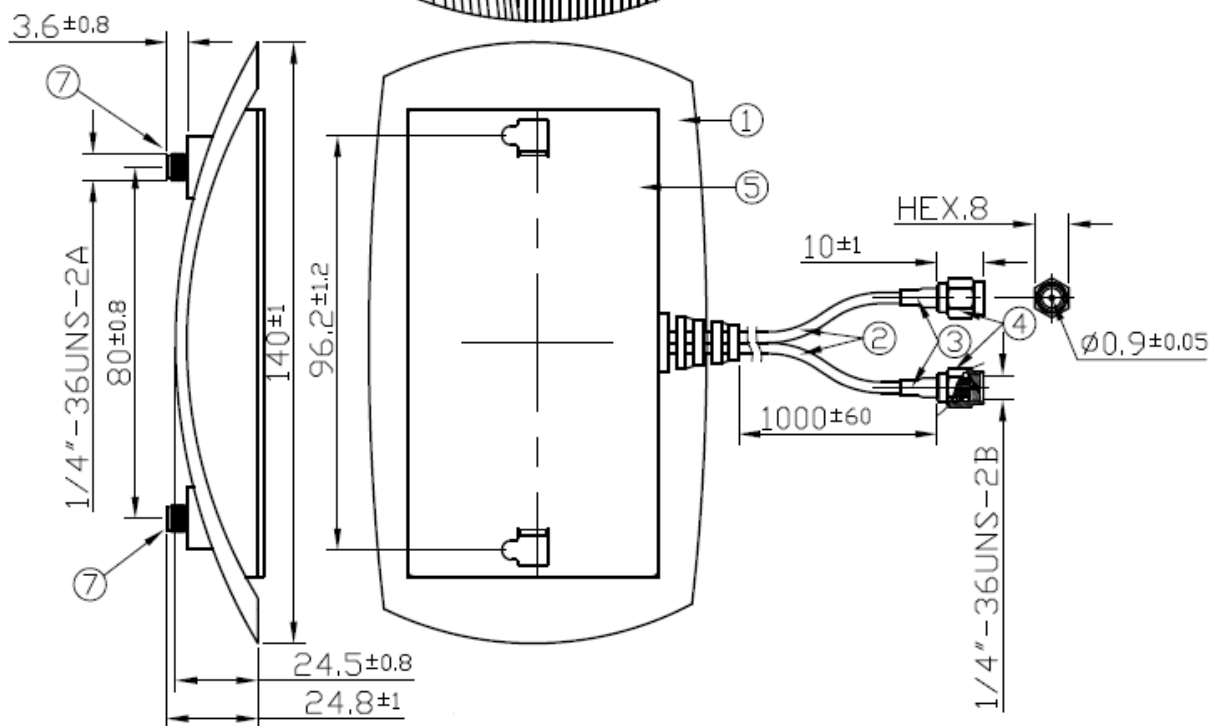


5. Packaging


1 MB.200.C per PE bag
 Bag Dimensions - 216cm*158cm
 1 PE bag per Box
 Box Dimensions - 185*130*40mm
 Total Weight - 180g

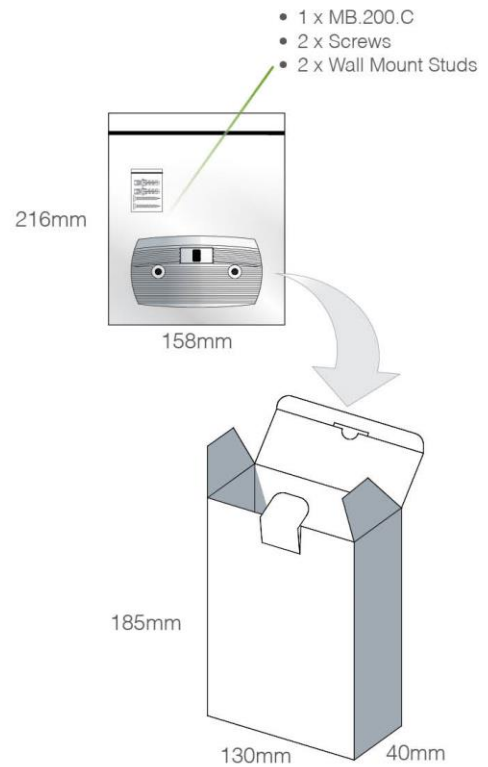

19 boxes per carton
Carton Dimensions - 360*280*270mm
Weight - 5Kg

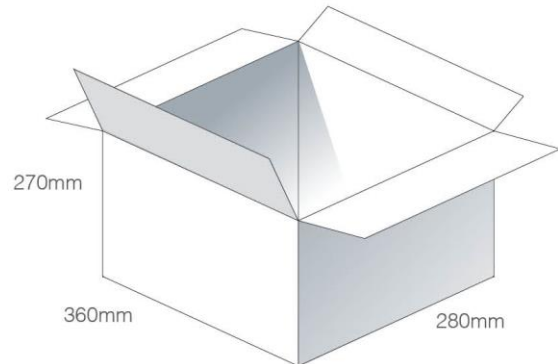

Pallet Dimensions 1100*1120*1500mm
60 Cartons per Pallet
12 Cartons per layer
5 Layers

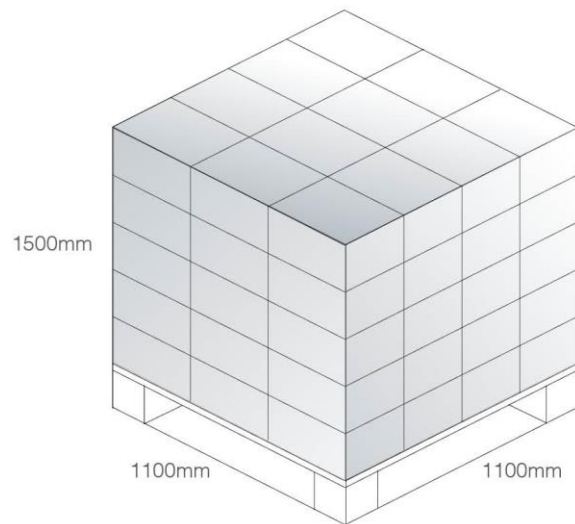

6. Mounting Type

6.1 Wall Mount installation



Reference Antenna: TG.35.0113

6.2 Magnet Mount installation



Reference Antenna: TG.35.0113

6.3 Desktop Mount installation



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru