

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850400696](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612 Receptacle, Style B, 32 Circuits, Lead free

Documents:
[3D Model](#) [Product Specification PS-85042-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General


Product Family Backplane Connectors
Series [85040](#)
Application Daughtercard
Comments No Mounting Clips. No Flux Proof
Component Type PCB Receptacle
Overview [din_41612](#)
Product Name IEC 603-2/DIN 41612
Style B

Physical

Circuits (Loaded) 32
Circuits (maximum) 32
Circuits Detail Rows A & B
Durability (mating cycles max) 400
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Number of Columns 16
Number of Pairs Open Pin Field
Number of Rows 2
Orientation Vertical
PC Tail Length (in) 0.114 In
PC Tail Length (mm) 2.90 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.063 In, 0.157 In
PCB Thickness Recommended (mm) 1.60 mm, 4.00 mm
Packaging Type Bag
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Pitch - Term. Interface (in) 0.100 In
Pitch - Term. Interface (mm) 2.54 mm
Polarized to PCB Yes
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55°C to +125°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 1A
Data Rate 622.0 Mbps

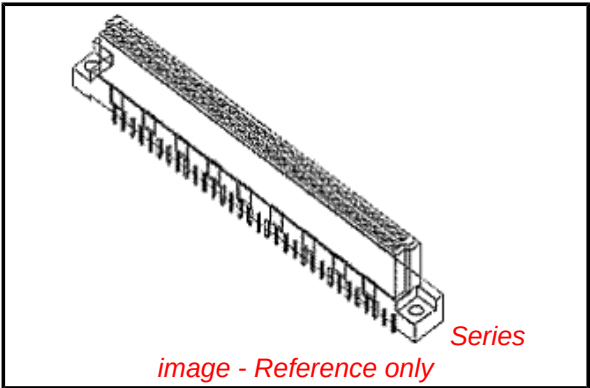

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[85040Series](#)

Mates With
DIN 41612 Headers [85001](#) , [85011](#)

Real Signals (per 25mm)	20
Shielded	No
Voltage - Maximum	250V AC (RMS)






Material Info

Reference - Drawing Numbers


Product Specification	PS-85042-001
Sales Drawing	SDA-85040-0001, SDA-85040-0696

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

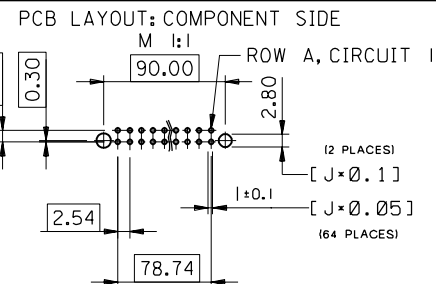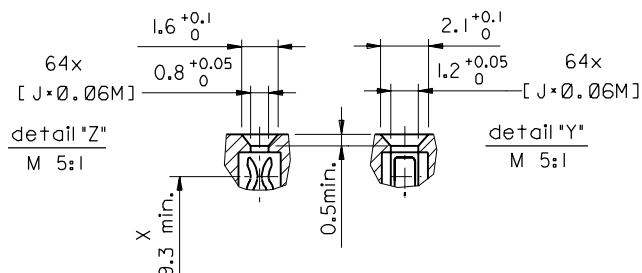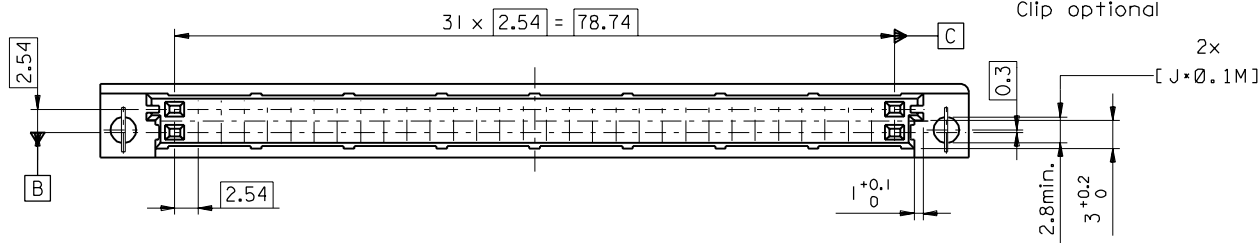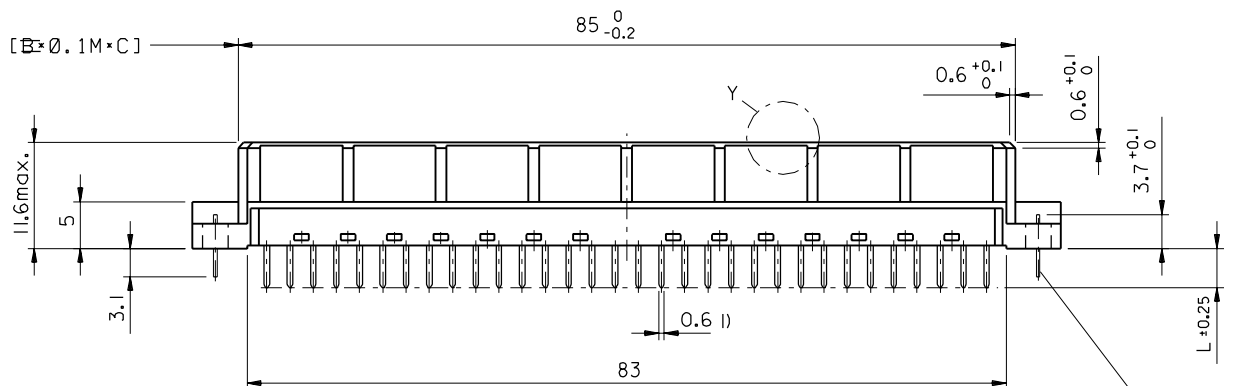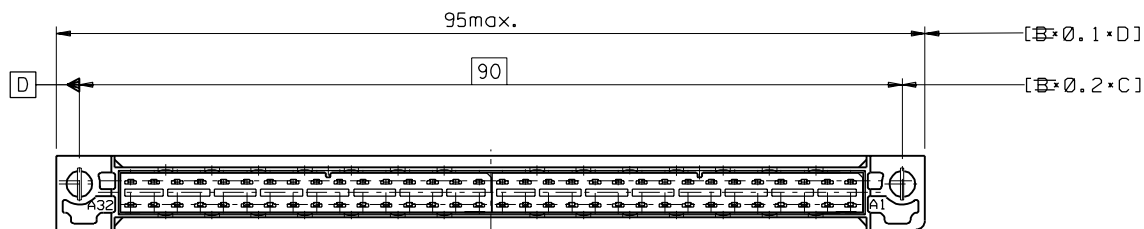

1) tails to fit in PC-board layout

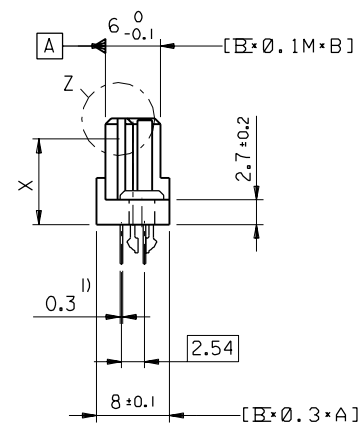

FIRST ANGLE PROJECTION

REVISE ONLY ON CAD SYSTEM

SH. REV.

REVISIONS FOR PREVIOUS EDITIONS	LTR	UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±2°		DRWG BY KN	SIGN
		INCH METRIC			
		3 PLACE ±	±		
		2 PLACE ±	±		
		1 PLACE ±	±		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				CHK'D BY Ca	SIGN
DESIGN DIMENSION		☒ MM			
		☐ IN.			
EQUIVALENT DIMENSION		☐ MM			
		☐ IN.			
IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY				APP'D BY JB	SIGN
SCALE					
2:1					

VIEW ON MATING SIDE

1		
2	▷	
3		
4	▷	
5		
6	▷	
7		
8	▷	
9		
10	▷	
11		
12	▷	
13		
14	▷	
15		
16	▷	
17		
18	▷	
19		
20	▷	
21		
22	▷	
23		
24	▷	
25		
26	▷	
27		
28	▷	
29		
30		
31	▷	
32		

A = 32 CONTACTS L = 2.9

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SDA-85040-0001 sht.1
Technical Data	PS-85042-0001

A	G2/0	a2,4,6...32	b2,4,6...32
Contact symbol	Per form. level	Contact position number	

ECN 2264	Produkt spec.	96-10-18 KN	REVISIONS	FOR PREVIOUS REVISIONS SEE MFG LIST	UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR $\pm 2^\circ$			DRAWG BY Ca	SIGN	REVISION ONLY ON CAD SYSTEM			SH.	REV.
					INCH		METRIC							
					3 PLACE $\pm$.	$\pm$								
					2 PLACE $\pm$.	$\pm$								
			1 PLACE $\pm$.	$\pm$				CHK'D BY KN	SIGN	TITLE 64 pos. female connector acc. DIN 41612 style B contacts arrangement				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				APP'D BY	SIGN						
			DESIGN DIMENSION ☐ MM ☐ IN.							SHEET NO. DATE				
			EQUIVALENT DIMENSION ☐ MM ☐ IN.							SCALE				
			IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY							PART NO.		DWG NO.	SIZE	
A1											85040-0696	SDA-85040-0696	A	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru