

---

**Preliminary Product Specification**

---

**1310nm DFB Laser Diode LC TOSA**

---

**DFB-1310-10LR-LCA**

---

## PRODUCT FEATURES

- Supports 9.95 to 10.5Gb/s bit rates
- Extended temperature range -5°C to 85°C
- Uncooled 1310nm DFB Laser
- LC interface



## APPLICATIONS

- 10GBASE-LR
- 10G Fiber Channel

The DFB-1310-10LR-LCA is specifically designed for applications based on several optical communications standards, including IEEE 10GBASE-LR, STM64, STM64 FEC, 10GFC, 10G GbE, 10G GbE FEC, & 10GFC FEC. Excellent optical performance is achieved by matching the electrical characteristics of the TOSA and laser to the external circuitry. The TOSA is designed to be paired with the 10G LR ROSA PIN-1310-10LR-x available at <http://www.finisar.com>

## PRODUCT SELECTION

Part Number	Description
DFB-1310-10LR-LCA	10Gbps 1310nm DFB TOSA

## I. Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40 to +85°C
Case Operating Temperature	-5°C to +85°C
Lead Solder Temperature	260°C, 10 sec.
Continuous Optical Power	20mW
Laser Diode Reverse Voltage	2V
Laser Diode Continuous Forward current	130mA
Monitor Photodiode Reverse Voltage	10V
Monitor Photodiode Reverse Current	2mA



### Notice

Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operations section for extended periods of time may affect reliability.

### Notice

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product

**II. Electro-Optical Characteristics ( $T_{\text{Range}} = -5^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ )**

Parameters	Test Condition	Symbol	Min.	Typ.	Max.	Units	Notes
Threshold current	T = 25°C T = T <sub>Range</sub>	I <sub>th</sub>		8	26	mA	
Operating current	T = 25°C T = T <sub>Range</sub>	I <sub>op</sub>		TBD	TBD	mA	
Modulation Current	T = 25°C T = T <sub>Range</sub>	I <sub>mod</sub>				mA	
Output power	CW, I <sub>F</sub> = 38mA	P <sub>OC</sub>		-0.5		dBm	1
Slope efficiency	T = 25°C	SE	0.02			mW/mA	
Peak Wavelength	T = T <sub>Range</sub>	λ <sub>p</sub>	1290		1330	nm	
Spectral Width (-20dB)	T = T <sub>Range</sub>	SW			1	nm	
Wavelength temperature coefficient		Δλ/ΔT		0.09		nm/°C	
Side Mode Suppression	T = T <sub>Range</sub>	SMSR	30			dB	
Transmitter Reflectance		RL			-12	dB	
Forward voltage	I=I <sub>op</sub> , T=T <sub>range</sub>	V <sub>f</sub>		1.6		V	
TOSA Input Resistance	I=I <sub>op</sub> , T=T <sub>range</sub>	R <sub>diff</sub>			9	Ohms	
Monitor PD current	T = 25°C, I=I <sub>op</sub> V <sub>B</sub> =-2.5V	I <sub>mon</sub>	50		1000	□A	
Power Tracking Error	I <sub>mon</sub> =Constant	TE	-1.5		1.5	dB	
Monitor Dark Current	T = 25°C, V <sub>B</sub> = -5V T = T <sub>Range</sub> , V <sub>B</sub> = -5V	I <sub>d</sub>			5 100	nA	
Monitor PD Capacitance	V <sub>B</sub> = -5V, f=1MHz, T=25°C	C <sub>mon</sub>			10	Pf	
Bandwidth	I=I <sub>op</sub> , T=25°C	S21	7.5			GHz	
Differential Return Loss	0.1<f<7.5GHz 7.5<f<12.5GHz	SDD11	TBD TBD			dB	

Notes:

1. Output power specification is defined into single mode fiber (SMF-28)

### III. Environmental Specifications

Parameter	Symbol	Min	Typ	Max	Units	Ref.
Case Operating Temperature	$T_{op}$	-5		85	°C	
Storage Temperature	$T_{sto}$	-40		85	°C	

### IV. Regulatory Compliance


Feature	Agency	Standard	Certificate Number
Laser Eye Safety	FDA/CDRH	CDRH 21 CFR 1040 and Laser Notice 50	0820400

Copies of the referenced certificates are available at Finisar Corporation upon request.


### V. Mechanical Specifications

#### PINOUT: TO

PIN	Description
1	GND
2	LD Cathode
3	MPD Anode
4	LD Anode/MPD Cathode

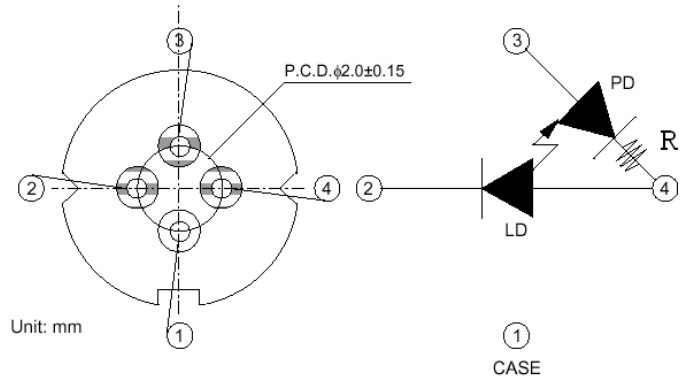


#### PINOUT: Flex

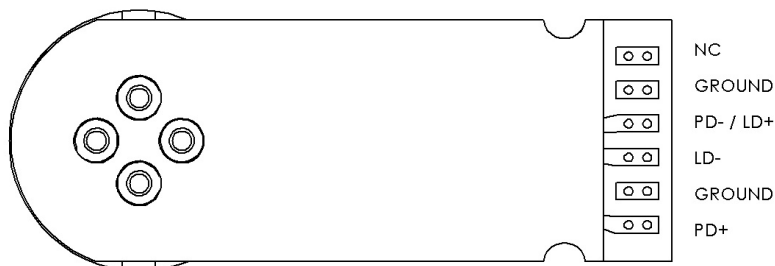

**MOUNTING DIMENSION**

(Dimensions in mm/inches)

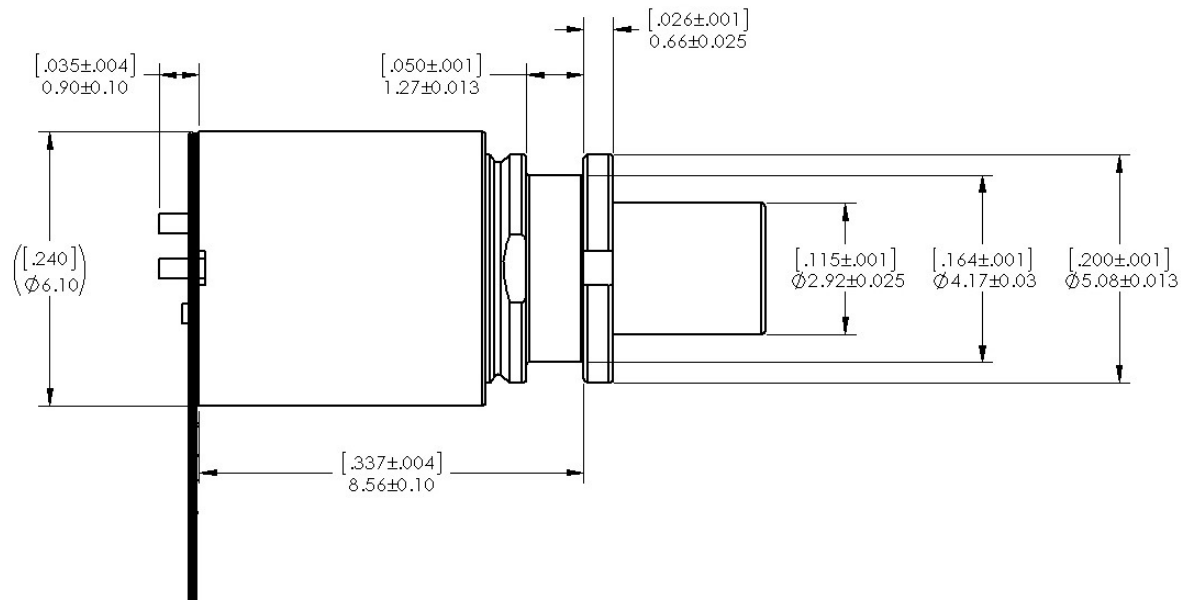**VI. Revision History**

Revision	Date	Description
B00	10/14/2014	• Converted to Finisar standard template

**VII. For More Information**

Finisar Corporation  
 1389 Moffett Park Drive  
 Sunnyvale, CA 94089-1133  
 Tel. 1-408-548-1000  
 Fax 1-408-541-6138  
[sales@finisar.com](mailto:sales@finisar.com)  
[www.finisar.com](http://www.finisar.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)